


Dämpfung bei 20°C in dB/100:
attenuation at 20°C in dB/100m:

- 100 MHz - 5.2 dB
- 200 MHz - 7.2 dB
- 300 MHz - 8.8 dB
- 500 MHz - 12.3 dB
- 800 MHz - 15.6 dB
- 1000 MHz - 18.3 dB
- 1350 MHz - 21.8 dB
- 1750 MHz - 24.9 dB
- 2050 MHz - 28.4 dB
- 2450 MHz - 33.4 dB

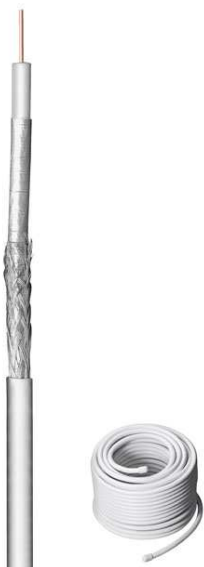

- Koaxial-Kabel (Cu); 100dB; 2fach geschirmt; CU
- 25m Ring, Klasse A
- > 100 dB Schirmungsmaß
- 6,8 mm Aussenmantel PVC / weiss
- 1,13 mm Kupfer Innenleiter (Cu)
- Folienabschirmung Aluminium
- Geflecht 128 x 0,12 Aluminium
- 75 Ohm Wellenwiderstand
- mit Meter Markierung
- Klasse A
- doppelt geschirmt
- RoHS-konform

- coaxial cable (Cu); 100dB; 2x shielded
- 25m on a ring, class A
- > 100 dB screening immunity
- 6.8 mm jacket PVC/white
- 1.13 mm inner conductor (Cu)
- foil screen aluminium
- braiding: 128 x 0.12 aluminum
- 75 Ohm impedance
- with meter mark
- class A
- RoHS-compliant

Änderungen

Datum	Name	gez.:	Datum	Name
		gepr.:	02.11.2010	li
		Norm:	02.11.2010	li

Bezeichnung

SAT KK 100-68

Zeichnungs-Nr.:

67094

Blatt

wentronic

von