


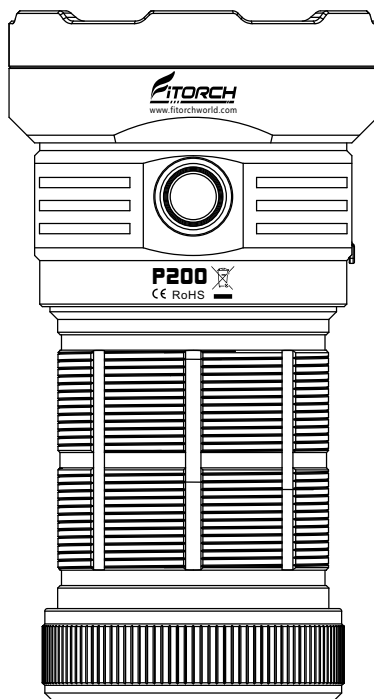

P200

USER MANUAL

POWERFUL RECHARGEABLE SEARCHING LIGHT
14,000 LUMENS MAXIMUM OUTPUT

Specification

- USB Type-C charging
- 24,000mAh large capacity battery.
- 14,000 lumens maximum output and 650 meters maximum beam distance.
- 4 high-light LEDs and coated lens with high light transmittance
- Modes(main LED): Turbo-High-Medium-Low-Eco and Strobe&SOS
- Charge and discharge with 3A current
- Enter the Turbo and Strobe quickly
- Automatic locking function.
- Power indication function.
- Power bank function
- Dimensions: $\varnothing 72(\text{head}) \times \varnothing 53(\text{body}) \times 134.8(\text{length})\text{mm}$.
- Weight: 484g(without battery)
- Accessories Included: 1*charging cable, 1*handle, 1*24000mAh battery, O-ring

P200 Data

FL1 STANDARD	TURBO	HIGH	MEDIUM	LOW	ECO	STROBE	SOS
OUTPUT	14,000 Lumens	2,700 Lumens	1,500 Lumens	650 Lumens	180 Lumens	14,000 Lumens	1,000 Lumens
RUNTIME	6h	7h	9h	25.5h	68h	/	/
INTENSITY	108,000cd						
DISTANCE	650m(Max)						
WATERPROOF	IP68						
IMPACT RESISTANCE	1m						

Note: all datas above were generated in Fitorch lab. Differences may happen basing on usage and conditions.

Operation

- **On/Off:**

When the light is locked, double click the side switch to activate the light. The flashlight will start working from the last mode last used. Press the side switch for 1s to turn off the light.

- **Mode change:**

When power on, click the side switch to cycle through High-Medium-Low-ECO

- **Turbo and Strobe&SOS:**

When power on, double click the side switch to activate Turbo, and quickly click the side switch 3 times to enter Strobe, and then go to the SOS.

- **Lock&Unlock:**

When the light is off, click the side switch 4 times constantly to lock the light. Double click to unlock the light. When the light is off and no action for 1 minute, the light will be locked automatically.

- **Power Detection:**

When open the light, the power indicator around the side switch will indicate the current power by displaying green or red. Green light: 75%-100%; Green flash: 50%-75%; Red light: 25%-50%; Red flash: <25%.

- **Charge&Discharge:**

Charge: Switch off the light and remove the USB cap to reveal the USB Type-C charging port, and then connect the charging port and the power source by charging cable. The indicator below the side switch will be red during charging, and it will change to green after charging.

Discharge: Connect the charging port of the P200 to another electronic device via a Fitorch CC-1 (charge and discharge cable), and then you can recharge your electronic device now.

Usage and Maintenance

- Disassembling the sealed head will damage the lights and void the warranty.
- High quality batteries are recommended.
- O-ring will be wear after a Long-term use, change it In included spare one to maintain watertight seal.
- Unload the batteries if assure the light won't use a bit of long time, then better put It into Inner box(Built-in battery excluded).
- Store and keep the light off fire, statics, steaming and humidity surroundings.
- Clean the body with soft fabric clothing then lubricate In silicon grease per half a year.
- Periodic cleaning of batteries contacts to improve the flashlight performance as dirty contacts cause the lamp flicking, shine intermittently or even fail to illuminate for below factors(Built-in battery excluded).
 - A: Battery needs replacing (choose the battery which mentions on this manual)
 - B: PCB, Spring or other contacts is dirty (clean the contacts In cotton swab In soaked rubbing alcohol)

WARNING!

- Looking at the light for a long time will harm your eyes. Don't shine the light directly into anyone's eyes.
- The light will accumulate a lot of heat when used for extended periods, resulting in a high temperature of the light housing. Pay attention to safe use to avoid scalding.
- Do not shine the light to an object at close range to avoid burning the object or causing danger due to high temperature.
- The LED and battery of this light are not replaceable.

Warranty

- 15 days replacement: Fitorch will replace identical or equal products with documented manufacturing defects within 15 days of purchase.
- 5-year free repair: This light is non-detachable and enjoy the service of 5 year free repair of purchase if problems happen in normal use.
Rechargeable battery enjoys 1-year warranty.



OVbutiken.se