

wing the orientation shown

2. Charging the Phone and Power On

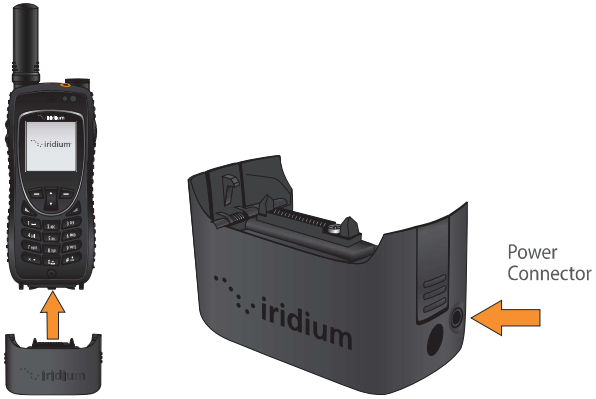

- In order to charge the Iridium Extreme®, the appropriate adapter must first be selected and attached to the bottom of the phone.
- Prior to installation, open your phone's accessory connector cover on the bottom of your phone and move it to the back of your phone, securing it to the rear retaining features.
- Select the appropriate adapter and orient it with the bottom of the phone so the Iridium brand is facing forward. Then press the adapter up until the side clasps are locked into place and the adapter is securely fastened to your phone.
- Connect the travel charger or auto accessory charger to the accessory adapter, ensuring that the accessory adapter is attached to your phone.
- Plug the travel charger or auto accessory adapter into the appropriate power source. The phone beeps.
- The battery symbol on the LCD display flashes while charging. When fully charged the battery symbol will become solid.



- When the phone has completed charging, remove the adapter by holding the phone with your left hand and grasping the adapter on both sides. Press the bottom portions of the side clasps with your thumb and index fingers and pull the adapter away from the phone.
- Move the accessory connector cover back to the accessory connector and press it so it is securely in place.
- Turn the phone on by pressing and holding the On/Off button on the top of the phone for 5 seconds. Note that you must wait a minimum of 5 seconds before powering on the Iridium Extreme® after you have disconnected from the charger.
- If prompted for a SIM PIN, enter the four to eight digit SIM card PIN code provided by your service provider. The default SIM PIN is 1111 and may be modified. Pressing the incorrect code multiple times will lock the phone and require an unlock code.

  Important: The battery should only be charged in environments between 0°C (32°F) to 45°C (113°F).

3. Set Up and Use of G



- From the main menu, select 'S
- By default, GPS is disabled. To 'GPS On/Off,' and select 'Enable
- Your phone is equipped with a of the phone for emergency n You will be prompted to enter emergency message recipient until these contacts are progra pressed, a message and/or call will be sent every 5 minutes to To modify these settings, selec

  CAUTION: you must configure contact in order to send an em emergency call recipient.
- To view your current GPS locat (initial update can take up to 2 the option to Share your locati New Message or a preconfigur Quick GPS list, select 'Message Your message will be sent with your location on a map.



il,' 'Voicemail Settings' and

ve' by pressing the left soft key.
key.
an outdoor area with a clear
and select 'Voicemail' from the
Ensure that the antenna is
g up during the phone call

hone number followed by
ord (default is the last seven

new password, record your
settings.
n and follow the same
ail notifications in the future.

5. Make a Call

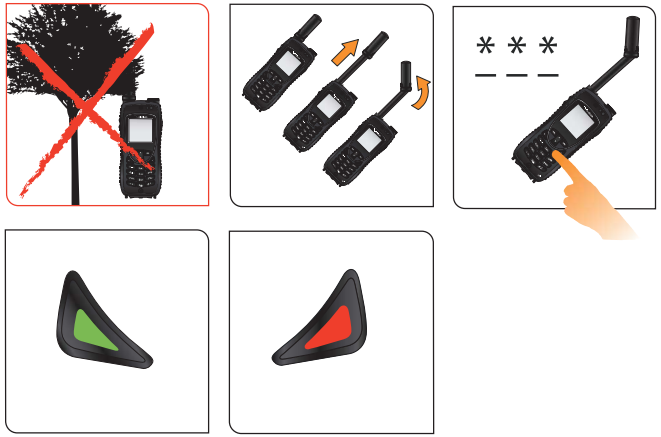

- The phone must be used outside, away from trees and tall buildings.
- Power-on by pressing black button on the top of the phone.
- Phone will display 'searching for network' and then 'Registered.' If phone has been left on when inside of a building, it will take longer to find and register with the network in order to save power. To accelerate network registration, turn phone off and on once outside.
- Prior to making a call, extend the antenna completely and rotate so it points directly upwards. Ensure that the antenna is articulated left or right so it is oriented directly up when held to your ear during use.
- To make a call, enter the full dialing sequence: 00 or + [Country Code] [Phone Number].
- Press the green key to initiate the call and press the red key to end the call. When the call is complete, return the antenna to the center position, then retract the antenna for storage when the phone is not in use.
- To store contacts, select 'Menu,' 'My Phonebook,' 'Options,' and then 'New' to create and save a New Entry.

6. Send a Text Message (SMS)



- You can send and receive text messages and short emails using your Iridium Extreme phone. Prior to sending short emails, it is helpful to store email addresses in your phonebook to automate delivery.
- To enable the predictive text software on your phone, select 'Setup' from the main menu, then 'Language,' then 'Text entry,' and change the setting from 'Multi-tap' to 'English,' 'French,' or 'Spanish' predictive text.
- To send a text message select 'Messages' from the main menu, then 'Create message.' If you wish to send to an email address that is not stored in your phonebook, type the email address, add a space, and then type your message.
- To type using predictive text entry, you may choose several different modes including word (ww), letter (lw), punctuation (#?@), and digits (123) by tapping the side convenience key.
- Once your message is completed, select 'Options,' then 'Send,' then 'Add,' and then you can either select a stored phonebook entry or manually enter a number. If you typed an email address in your message to send to an email address not stored in your phonebook, you must manually enter the number "+*2" in order to send to an email not stored in your phonebook.
- Your contacts may send you a message by visiting www.iridium.com and selecting 'Send a Satellite Message' by using your Iridium phone number or send an email to 8816[number]@msg.iridium.com.

7. Additional Tips



- Keeping the phone's battery ch
for use when needed. For max
the phone's battery to dischar
- Protect the antenna by stowin
in use.
- Your phone can be programm
international access code (00 c
main menu, select 'Setup' and