
Assembly Instructions




RECEPTION COUNTER 1145

covers articles

VRE2288 Reception Counter
VRE2289 Desypad Cork
VRE2206 Cable tray white for reception

2023-09-04

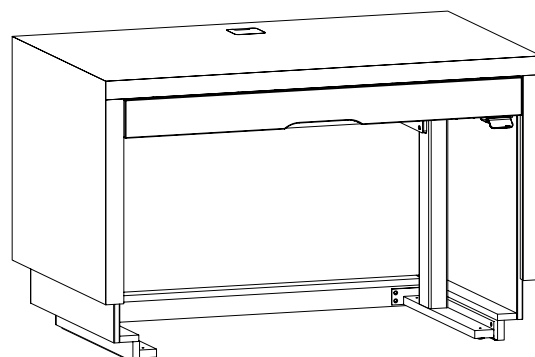

VOLVO RETAIL EXPERIENCE

CONTACT INFO: VRE@SENAB.COM
+46 31 351 51 00



SENAB

vre@senab.com


Reception Counter

BEFORE YOU START:

Make sure you are at the right location. Be careful when you lift the counter off the pallet, the edges are fragile. Do not lift holding the upper front of the counter. If something is broken and needs replacing, or if you have questions, please contact us at Senab Concept at vre@senab.com

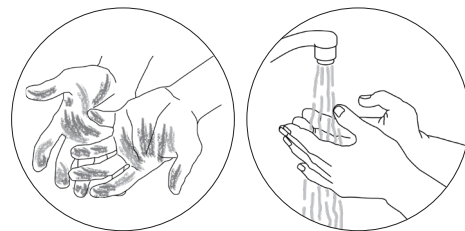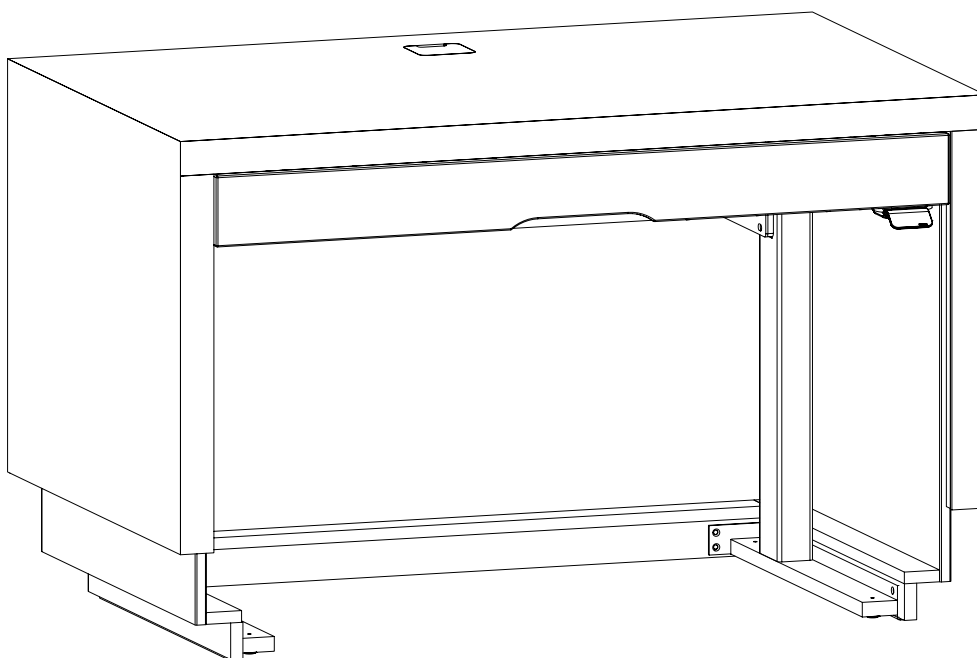


VRE2288
Reception Counter.




VRE2252
Glass for Reception Counter.
Purchased separately.



VRE2289
Deskpad Cork.
Included.



VRE2206
Cable Tray white for reception.
Included.



SENAB

vre@senab.com


Reception Counter

VRE2301
Reception Counter 1145




VRE2252
Glass for Reception Counter.
Purchased separately.

VRE2289
Deskpad Cork.
Included.

VRE2288
Reception Counter

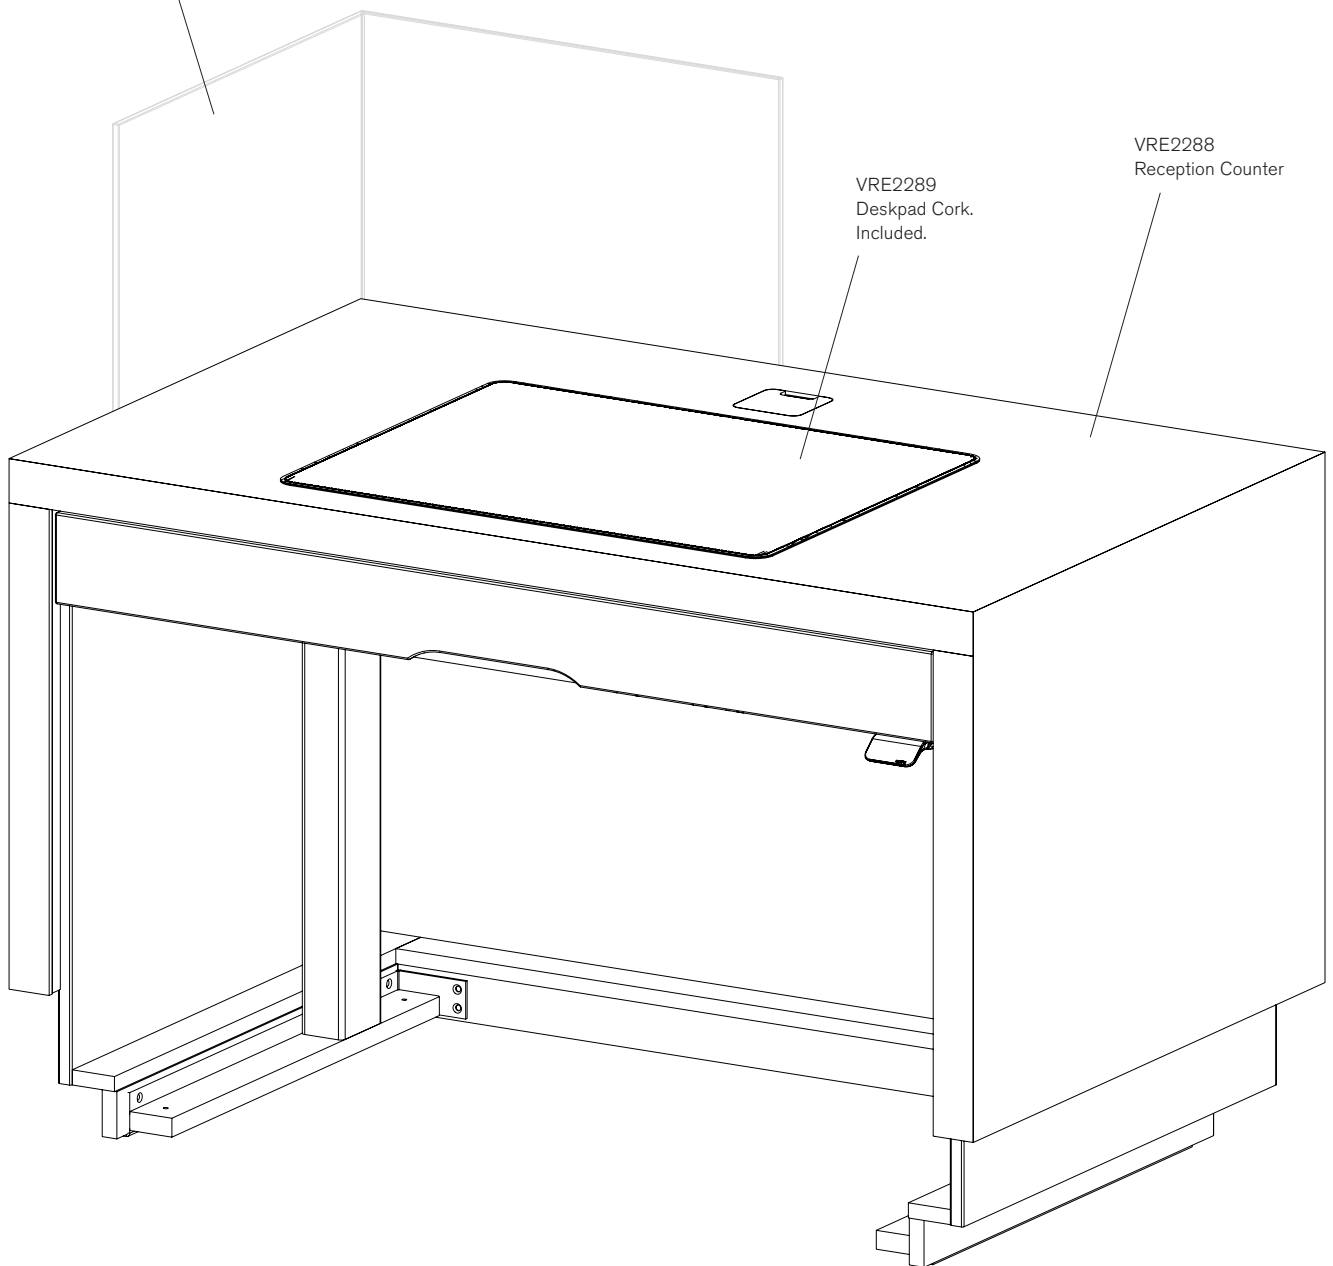

Reception Counter

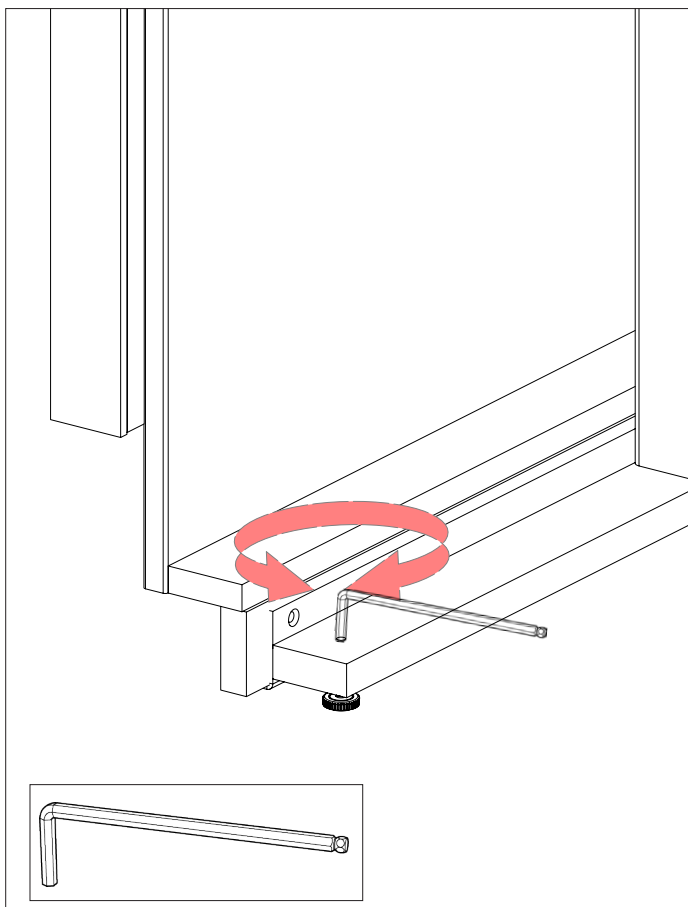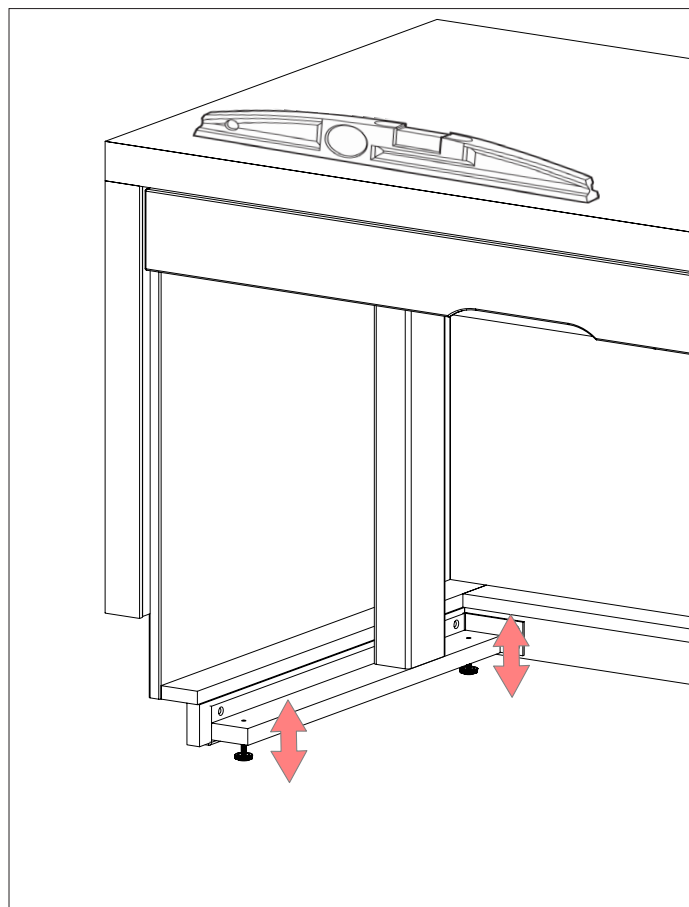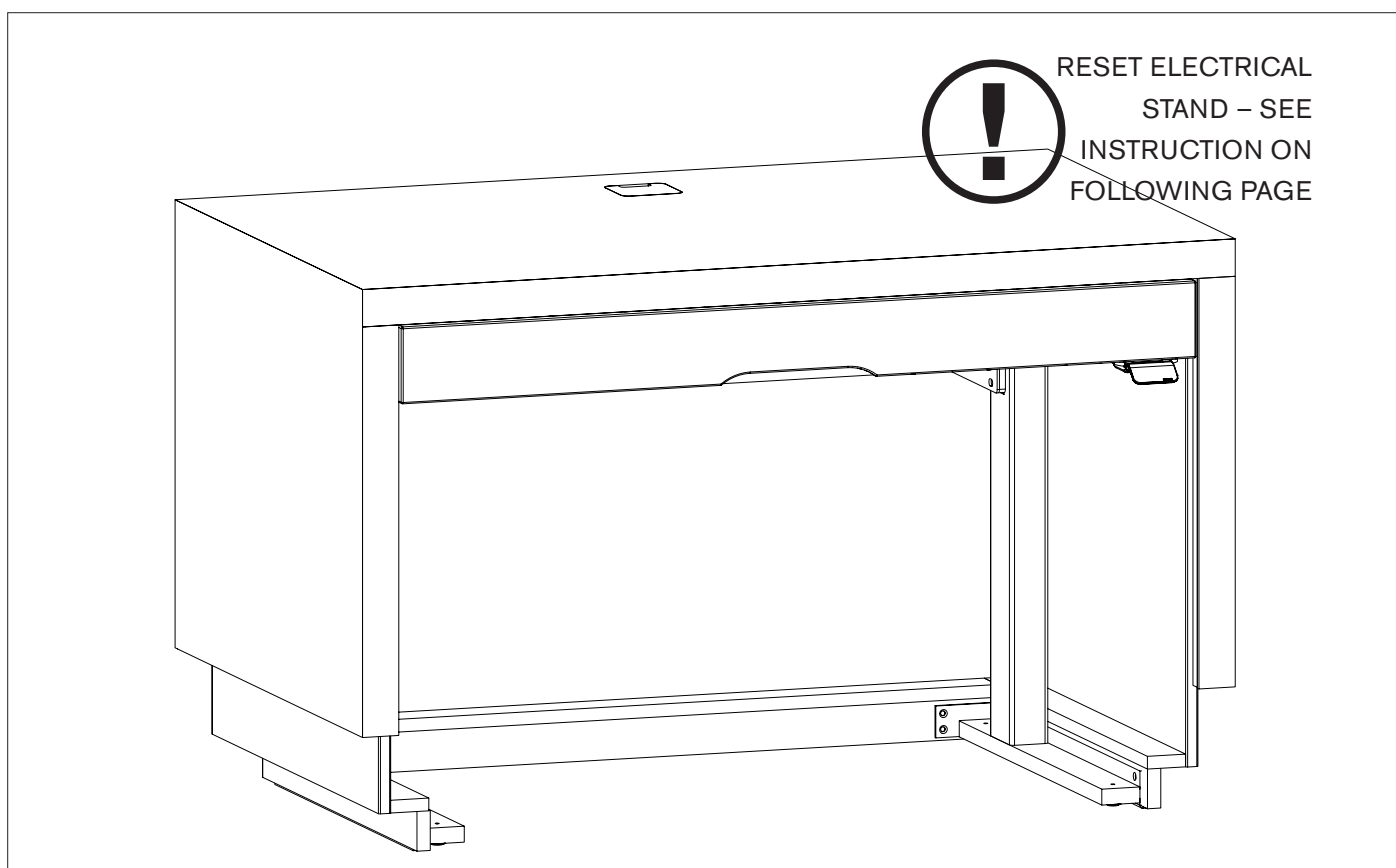

Reset Electrical Stand

MAXIMUM LOAD

Maximum wide spread load is 75 Kg

DESK HEIGHT

770mm - 1150mm

MAINTENANCE INFORMATION

Maintenance: The desk, with its integral electronic components is designed to be completely maintenance free. There is no need for any intermittent lubrication, adjustment or any subsequent maintenance for the lifetime of the desk.

CLEANING

Cleaning of this product should only be carried out with means of a dry cloth.

RESET PROCEDURE



Note: The desk will during reset be lowered 70mm below its lowest working height of 770mm. It is therefore of extreme importance to have all interfering objects removed from the area below the table top, such as mobile storages or chairs before the reset procedure is carried out.

RESET PROCEDURE



1. Lower the frame to its lowest position by pressing the down arrow on the hand control.
2. Release the button.
3. Press the button again and keep it pressed for 30seconds, the desk will now lower itself extra 70mm and then stop.
4. Release the down button, press the down button again and keep it pressed for 10seconds. The desk is now reset.
5. Press the up button to raise the desk to its normal working area above 770mm.

FAULT FINDING

If you should experience any difficulty with this product, please carry out following initial tests before contacting your local service partner/retailer:

1. Ensure the power source to the desk is functioning properly. Try connecting the desk to an alternate power source.
2. Ensure all plugs, leads and connectors between the motor, trans- former and hand control are properly connected.
3. Ensure there are no obstructions or damages to any of the cords.
4. Ensure that the product not is overloaded, and that the load is evenly spread.
5. If any of the motor cables have been disconnected while the product is connected to power, the reset procedure must be carried out. See above.
6. If the problem remains – contact your local retailer for support.

Reception Counter

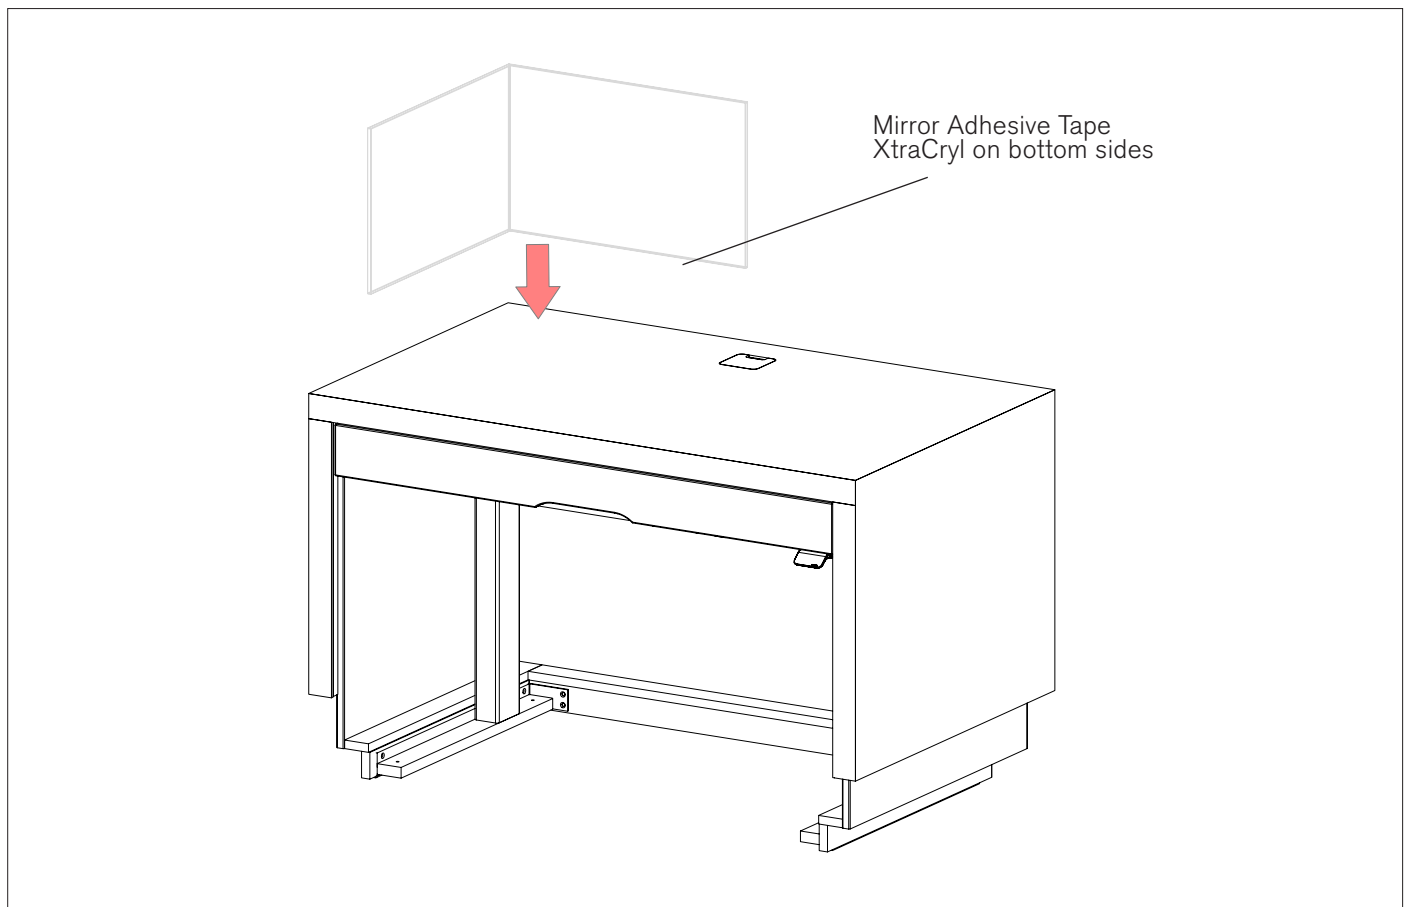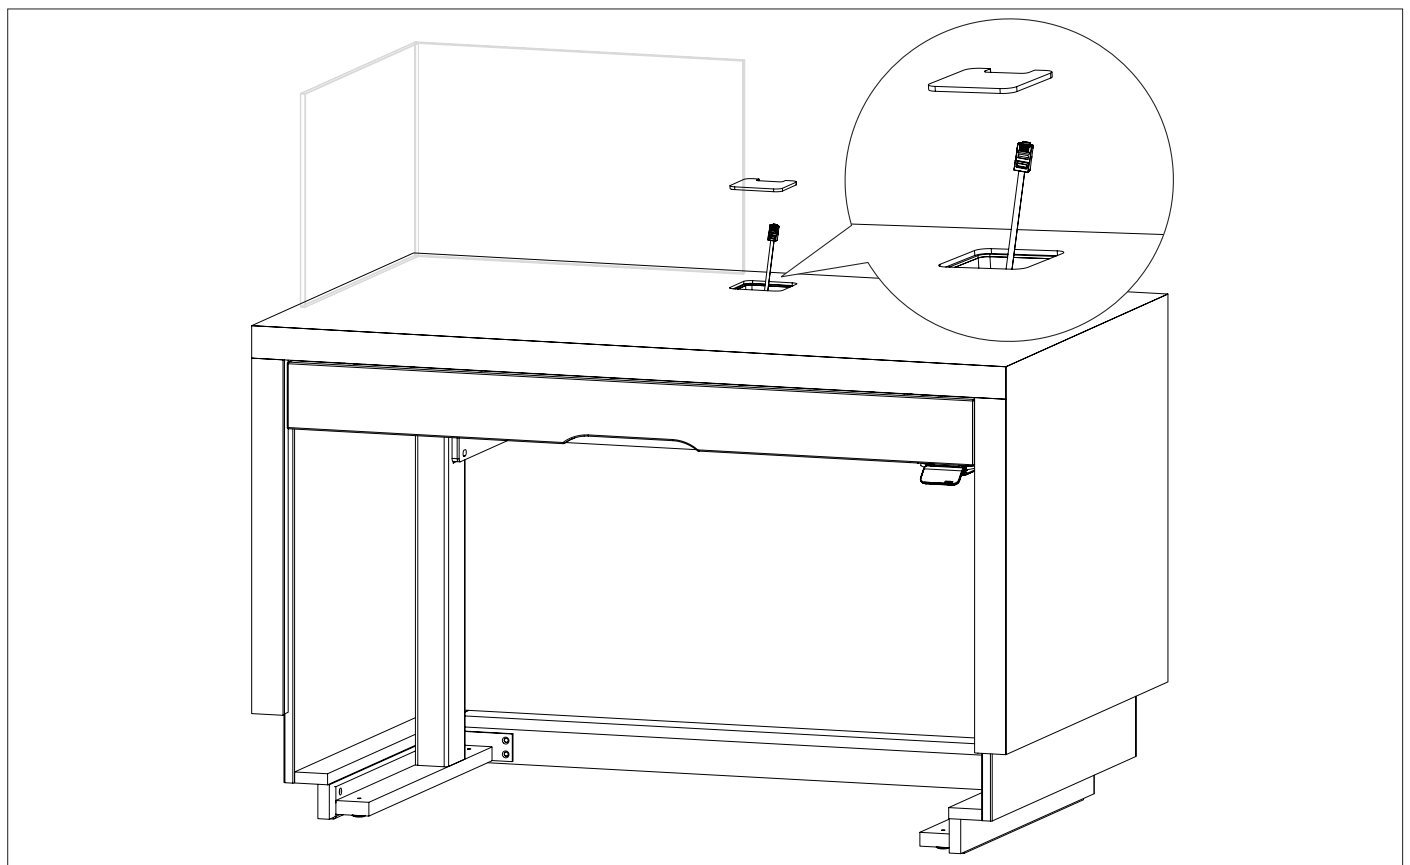

Reception Counter

