



Product Features

- Selectable constant current and constant voltage output. (Custom on request)
- Full-ioslated, delivering up to 40W of power.
- Short circuit, over current and over voltage protection. Up to 80% efficient.
- Fireproof environmental protection PC plastic cover
- 2 years quality warranty



Technical Specifications

Model No.	DR-CC-40			
Input Voltage Range	100-240V/AC			
AC Frequency	48-62Hz			
Input current	0.52Amax			
Output Mode	Constant Current			
Output Current	500mA	700mA	900mA	1200mA
On Load Voltage	38-76V	29-58V	22-44V	17-34V
No Load Voltage	85V	70V	52V	40V
Output Power	40W Max.			
Power Factor	>0.95			
Efficiency	>80%			
Dimensions	145*48*31(mm)			
Weight	177g			


Environmental Specifications

Operating Temperature	-30~45°C
Storage Temperature	-40~+70°C
Thermal Dissipation	Nature
Relative Humidity	5~95%
Isolation Voltage	In/Out 3000VAC
Vibration	5-55Hz/2g,30 Mimutes
Life Time	50000Hours,at TC max

Conformity & Standards

EMI	EN55022 EN55015 Class B
Safety	EN61347-1 EN61347-2-13
Electromageric Immunity	EN61547,ENV5024 EN61000-4-2/3/4/6/8/11
Harmonic Current Emissions	EN61000-3-2 EN61000-3-3

Installation Introduction

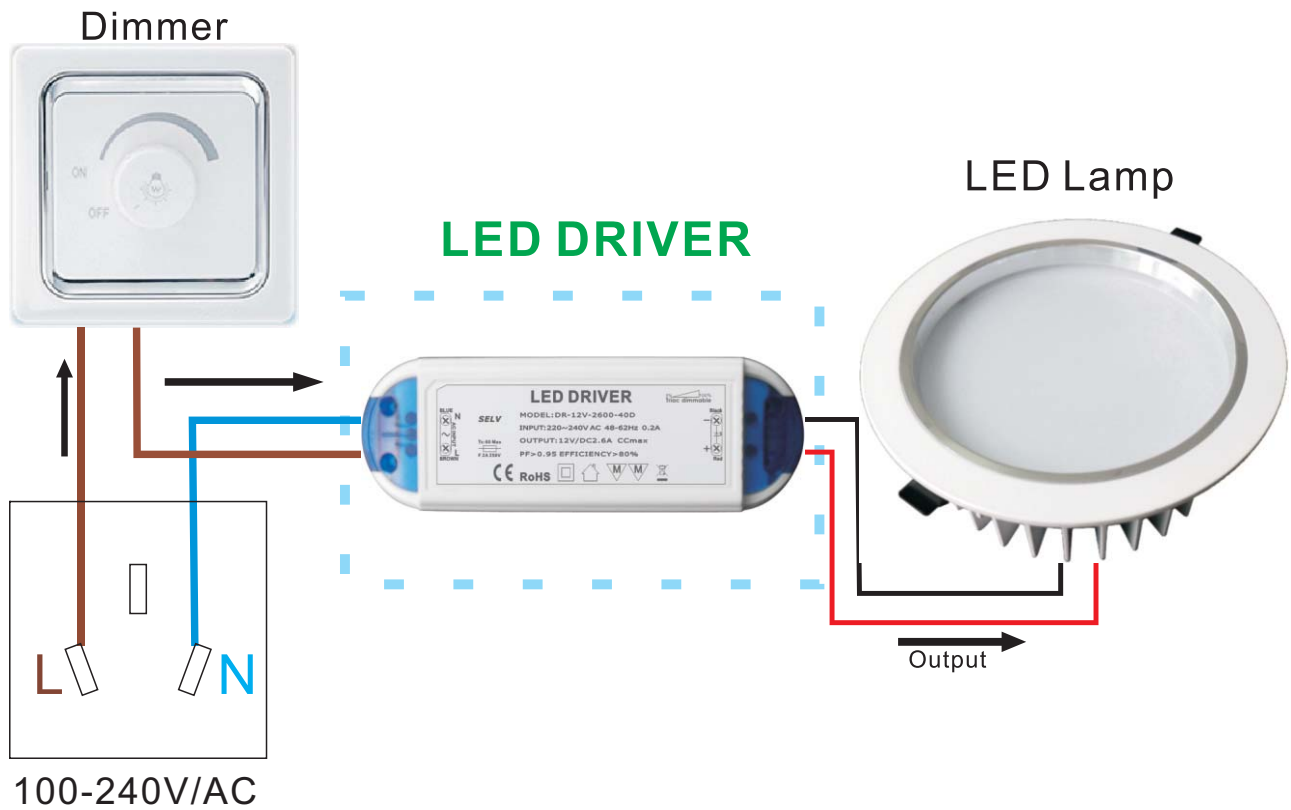

Dimensions Chart

