


# SC-B102

- IP67
- IP54
- Ultra-thin

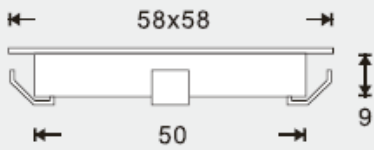

## • Specification

Model	SC-B102A	SC-B102B	SC-B102C
Voltage	DC 12V		
Rated Output Power	0.6W		0.4W (Single-color) / 0.9W (Multi-color)
LED Color	CW WW W R Y G B		RGB
LED	8pcs SMD3350 LED		12pcs SMD3350 LED
Cover	high-intensity tempered glass		
Surface Material	High Grade 304/316 Stainless Steel		
IP Rating	IP54	IP67	IP67
Weight	45g	50g	70g
Control Method 1	—		Four-wire Three-loop Circuit RGB controller + Remote Controller
Control Method 2	—		Multifunctional RGB Controller
Attached Parts:	DC12V constant voltage drive power supply;		
	22AWG wire with connectable waterproof plug;		
	T shape power cord with connectable waterproof plug or AMP.	Four-wire Three-loop circuit RGB controller +remote controller / multifunctional RGB controller;	

## • features

- Adopt SMD LED technology;
- Ultra thin design, low built-in depth 9 mm only;
- With easy & convenient installation;
- Walkover pressure max. 100KGS;
- Long lifespan over 50000 hours.



## • Installation:

