


Impedance vs Freq

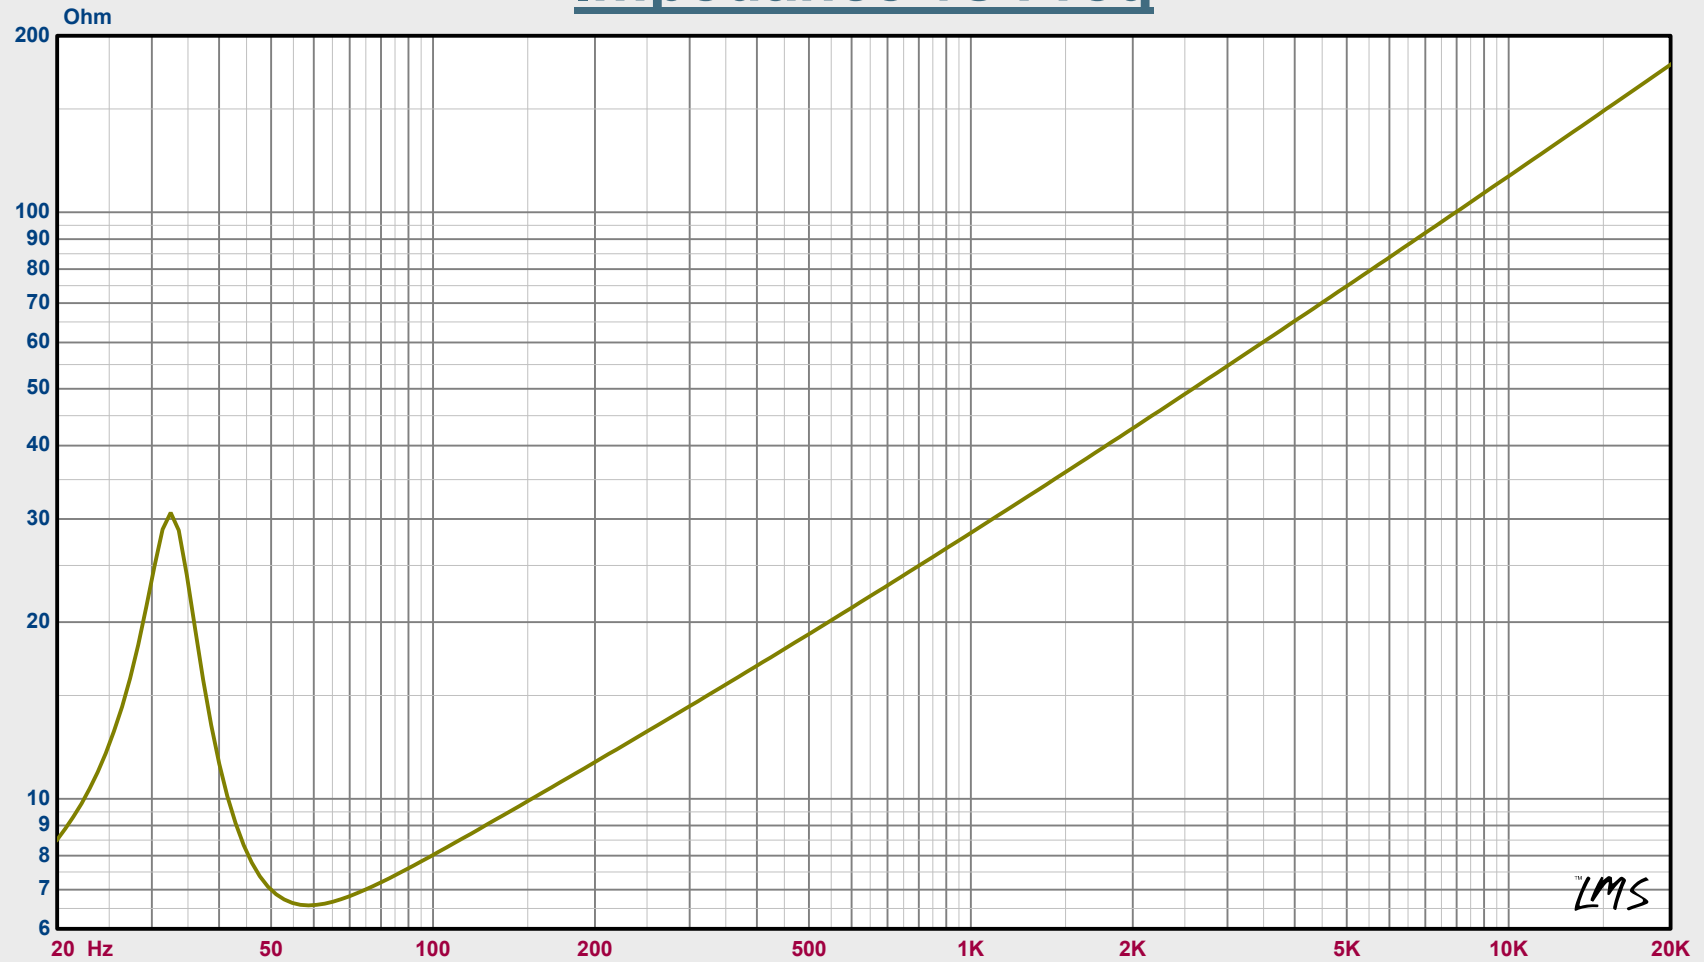

Map

— 28: SpkrModel: RJ-W152S4 20250717

Notes

Revc=4.000 Ohm Fo=32.741 Hz Sd=804.250 cm² Md=250.000 g

BL=23.072 T_槽 Qms= 5.598 Qes= 0.889 Qts= 0.767 No= 0.144 % SPLo= 83.6 dB

Vas=37.739 Ltr Cms=41.089m mm/N Krm=33.185m Ohm Erm=0.698

Mms=575.093 g Mmd=548.863m Kg Kxm=114.522m H Exm=0.598

LMS

4.6.0.371
5月-30-2007

Person:
Company:

Project:
File: 15寸.lib

Jul 17, 2025
Thr 3:16 pm

LINEAR X
S Y S T E M S