


Impedance vs Freq

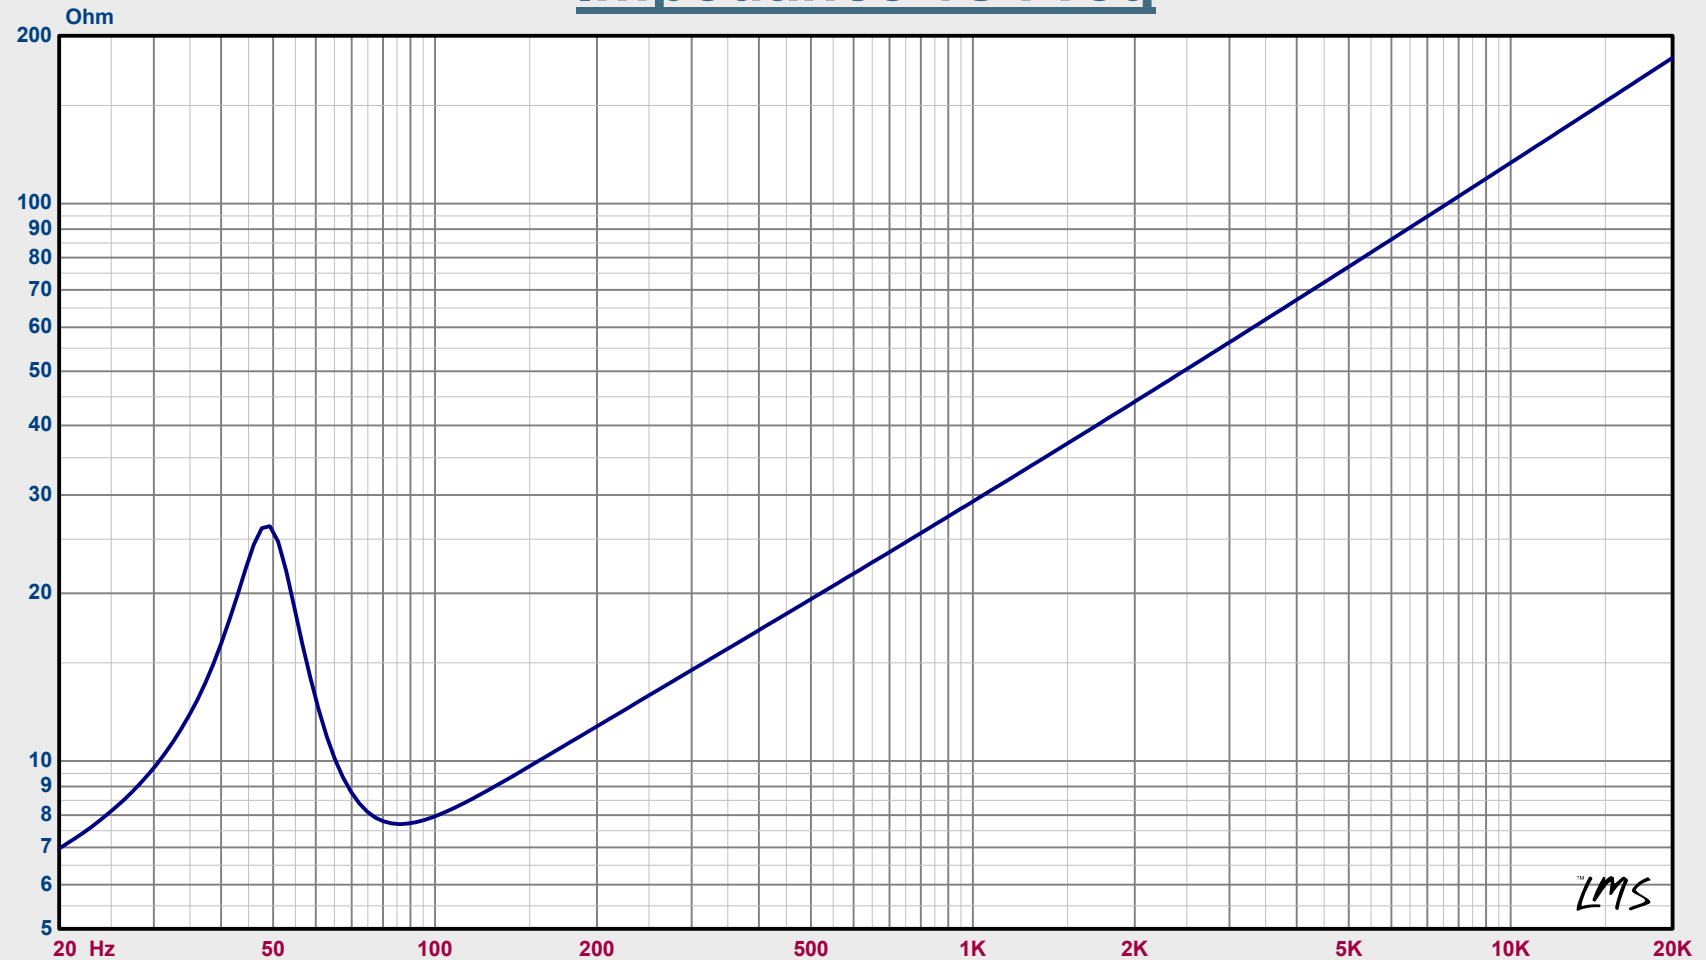

LMS

Map

— 20: SpkrModel: RJ-W102S4 20250716

Notes

Revc=4.000 Ohm Fo=49.316 Hz Sd=346.360 cm² Md=280.000 g

BL=20.848 T·m Qms= 4.031 Qes= 0.797 Qts= 0.665 No= 0.092 % SPLo= 81.7 dB

Vas=6.350 Ltr Cms=37.278m mm/N Krm=37.919m Ohm Erm=0.682

Mms=279.387 g Mmd=271.974m Kg Kxm=112.032m H Exm=0.607

LMS

4.6.0.371
5月-30-2007

Person:
Company:

Project:
File: 10寸.lib

Jul 16, 2025
Wed 4:34 pm

LINEAR X
S Y S T E M S