Diesel Pump - P510MAM

FUEL

RACOR®

Specifications:

Height:	*12.93” (32.84 cm)*
Width:	*4.8” (12.19 cm)*
Depth:	*5.14” (13.05 cm)*
Weight (Dry):	*7.37 lbs (3.34 kg)*
Ports:	*M16 X 1.5-6H*
Service Clearance:	*2.5” (6.35 cm)*
Max Flow Rate:	*72 gph (272 lph)*


NOTE: Assembly Includes Control Box, WIF Sensor, and WIF Harness Adapter

Create a Part Number


Mounting Head	Filtration Rating	Bowl Type
12V/24V Pump 72 gph (272 lph)	10 micron filtration	Marine - Metal Bowl
P5	10	MAM


ASSEMBLY	DESCRIPTION
P510MAM	Marine FF/WS, Pump, 72 gph Flow Rate, 10 Micron Filtration


Dimensions:

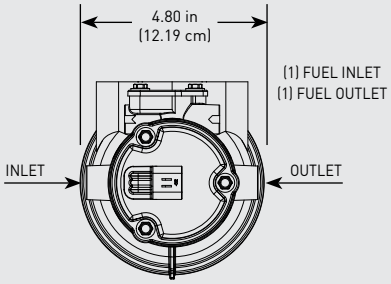


Top






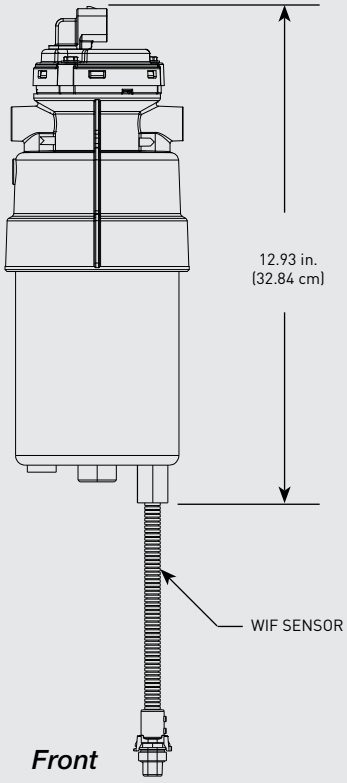

Front

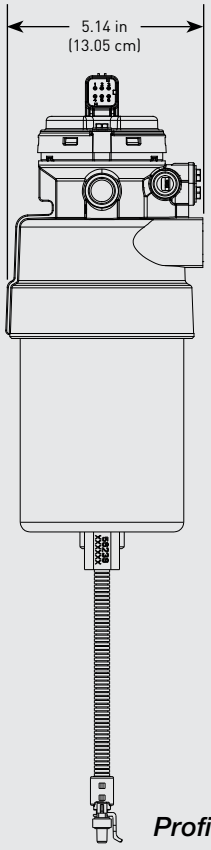

Profile

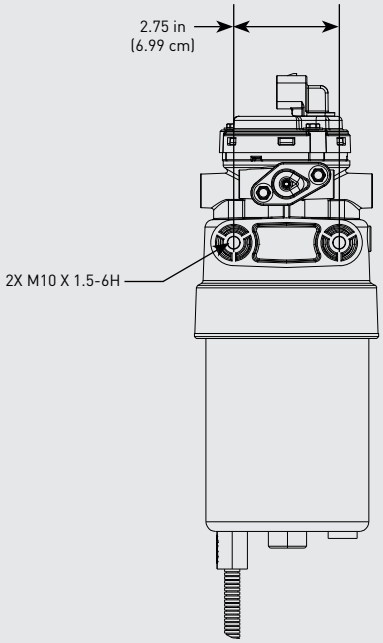

Back


Parker

⚠**WARNING:** The products described in this literature can expose you to chemicals including Diisononyl phthalate, Carbon black extract, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.


PARTS

Diesel Pump - P510MAM


1

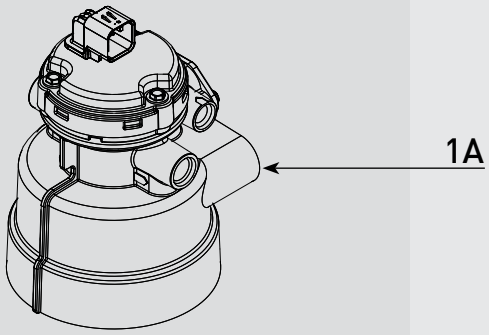

2

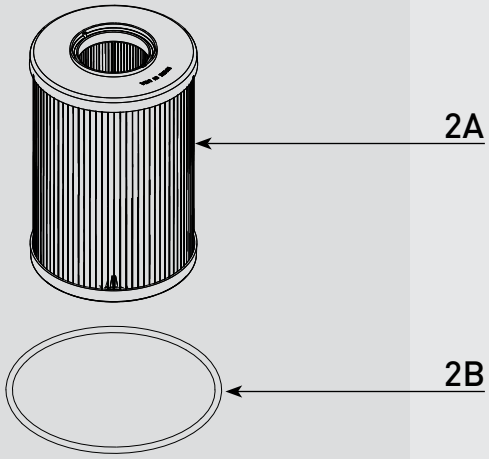

3

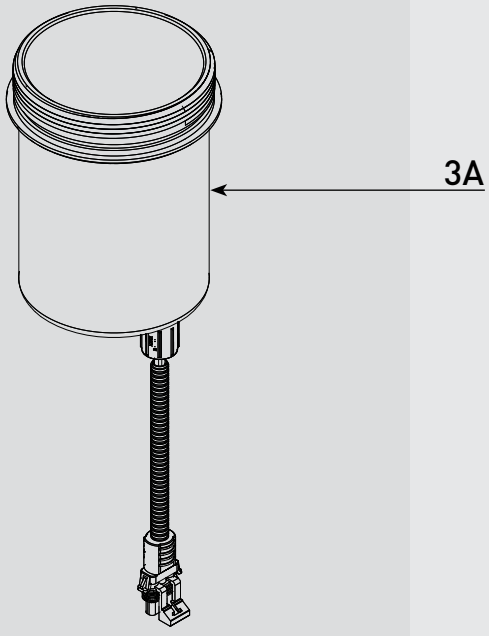

	Part #	Description
1A		P510MAM Pump/Head
2A	R58065-2	Replacement Filter - 2 micron - *Includes 2B*
	R58065-10	Replacement Filter - 10 micron - *Includes 2B*
	R58065-30	Replacement Filter - 30 micron - *Includes 2B*
2B		Bowl O-ring
3A		P510MAM Housing/Bowl

Additional Parts (not shown)

4A	**RK23191**	WIF Stainless Steel Probe Kit (1/2"-20 SAE - UL Listed/ABS Marine Type Approved) - No Internal Resistor, 12/24V - *Requires Water Detection Amplifier - See **RSL7501** for available Probes, Sensors, and Amplifiers*
4B	**RK 20726**	Water Detection Module Kit - 12 or 24 vdc - ***Includes Amplifier (Light and Buzzer) & RK 21069 (WIF Probe)*** *See **RSL7501** for available Probes, Sensors, and Amplifiers*
4C	**RK45043**	Fitting Kit (3/8"-18) - *Set of two (2) fittings*
	RK45044	Fitting Kit (1/2"-14) - *Set of two (2) fittings*

Online Link
P510MAM Product Selector

Questions? Email: **racortech@parker.com** Phone: **800-344-3286** News: www.**racornews**.com