

proTAC™ 5311

Space quality and military performance in compact and robust package for affordable price – innovative communications antenna for 4G data routers and voice communication systems.

Covers all 2G, 3G and 4G frequencies used worldwide (GSM, GPRS, DCS, UMTS, WCDMA, LTE, WLAN...)

Only proTAC™ can offer you these benefits

- Huge cost savings in satellite based data
- 4 antennas in one with 5dBi gain - without compromises
- longer range than standard antennas > 35km
- provides stable connection – good for critical ERP and VPN systems
- replaces existing antennas
- lightning and ESD protected
- works in all continents – in every network



Frequency range: 800MHz – 2.6GHz (extended range from 600MHz to 6GHz)

Gain: upto 5dBi

RF Power: 250W

Grounding: DC-grounded

Connector: N-type (female at bottom)



Size: 90mm (dome diameter)
120mm (height)
0.6kg (weight)
waterproof



Proposed installations:

proISO™ series galvanic isolators can be used to prevent ground leaks and loops

Mounting adaptor (stainless steel) from 140mm flange mount to 1 1/4" -11TPI available

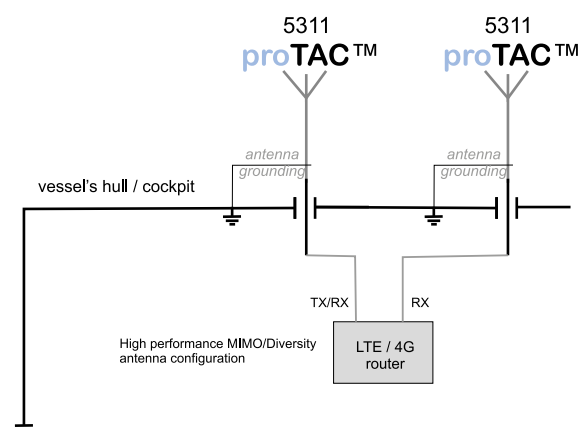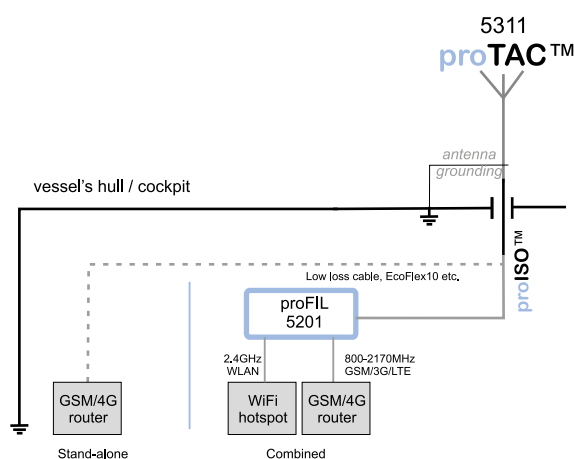

promarine

INTERFERENCE-FREE COMMUNICATIONS

proTAC™ 5311

wireless GSM/4G/WLAN communication antenna

Frequency range		
Frequency / band	VSWR with ground plane	VSWR without ground plane
Wideband	< 2.0 (460MHz – 6GHz)	< 2.0 (680MHz – 6GHz)
800MHz LTE	< 1,5	< 1,8
900MHz GSM/LTE	< 1,4	< 1,6
1800MHz DCS/LTE	< 1,5	< 1,3
1900MHz PCS/LTE	< 1,3	< 1,2
2100MHz 3G/WCDMA	< 1,4	< 1,2
2400MHz WLAN	< 1,5	< 1,3
2600MHz LTE	< 1,4	< 1,5
5850MHz WLAN	< 1,5	< 1,5

(ground plane used in measurements 1 m²)

Antenna gain

1-5 dBi

Powerhandling

Continuous total 250W

Mounting

proTAC™ 4-bolt flange mount
O-ring supplied for sealing
optional flange mount to 1 ¼" -11TPI
standard mount adaptor

Connector

N-type female at bottom

Environmental

Case IP68 shock proof
Operating temp: -30° - +60°

Material

Anodized Aluminium base
(electrically conducting)
Radome moulded plastic (ASA)

Dimensions

Height: 120mm (with connector)
Width: 90/140mm (radome/base plate)
Weight: 600g

ORDER CODE

ANT5311: proTAC 5311 Wireless GSM/4G/WLAN communications antenna

ACCANT1001: proTAC™ flange mount to 1 ¼" -11TPI pipe thread (inner thread), stainless steel (304)

Delivery time: From stock (with reservations)

promarine

INTERFERENCE-FREE COMMUNICATIONS