


Fitting Instructions for Toilet Seat 89610



Screw

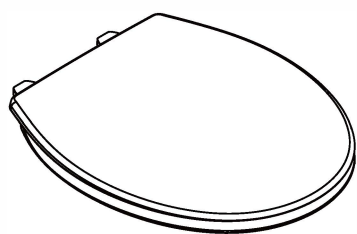

Adjustable Plate



Rubber Gasket




Washer




Locking Nut

1

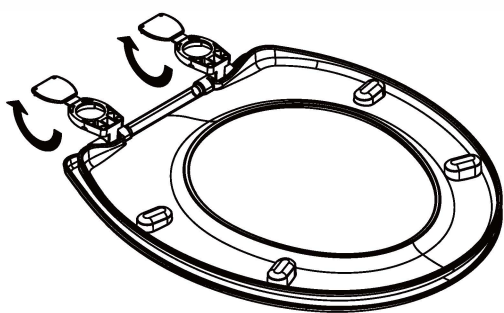


Open the covering caps on the hinges

2

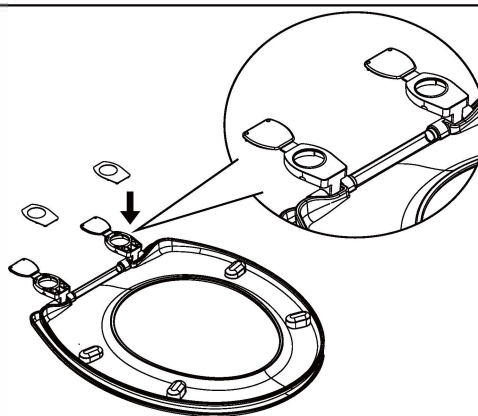


Load the rubber gaskets on the hinges

3

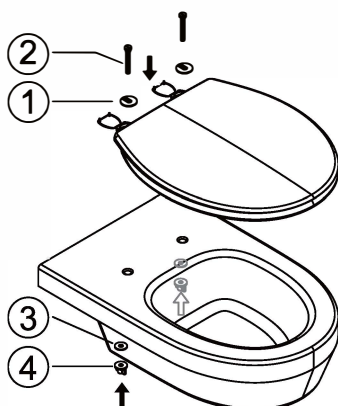


Insert the hinges into the toilet pan

4

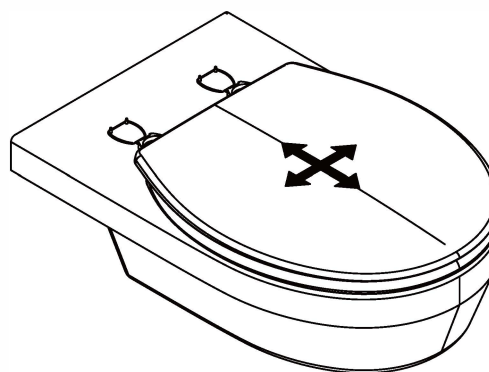

Align the toilet seat with the toilet pan

5

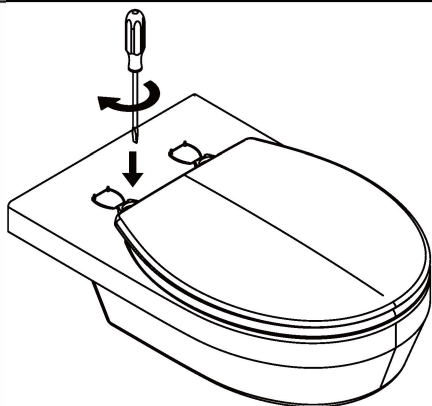

Tighten the screws