



NXT™ Pro


An advanced decision-making thermal imager with the highest resolution and NFPA 1801 Certification.



NEW!

Top Benefits of NXT Pro

- Top Performance
- X-Factor 2.0 Image Enhancement
- Seamless Gain Transition
- Proven Durability
- 5-Year Warranty
- NFPA 1801 Certified

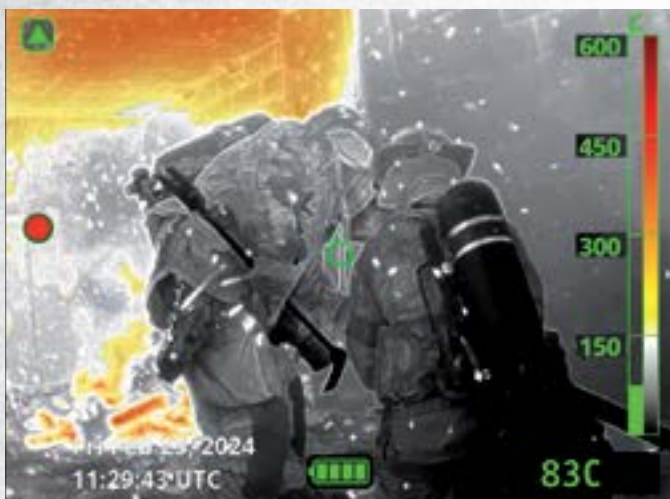

X-Factor 2.0 Image Enhancement

A fine-tuned lineup of image boosting technology like crisp white edge highlighting and exceptionally vivid images helps recognize people and objects faster. Highlights flow paths to quickly understand the scene.

Optional Feature Packs

Basic

- Thermal Throttle
- Hot Area Detector
- Cold Area Detector
- Zoom

Advanced

- Thermal Throttle
- Hot Area Detector
- Cold Area Detector
- Zoom
- Image Capture
- Video Recording
- On-Screen Playback



Seamless, Smooth, Instant Scenes

Move from high to low temp scenes smoothly with Seamless Gain Transition.



Faster Heat Source Identification

Speed up overhaul and search with Thermal Throttle (optional). Locate the hottest or coolest point of the scene instantly with Hot Area Detector and Cold Area Detector (optional).



Clear Decision-Making Details

Identify scene details vividly. Detect people, even in high heat. See details through transparent colorization.

AT A GLANCE

Image Enhancement	X-Factor 2.0
Resolution	640 X 480
Refresh Rate	Fast 60 Hz
Battery Life	Up to 6.5 hours
Certification	NFPA - 1801 Certified

The NFPA Powerhouse.



Technical Specifications

Warranty	5-years on imager and battery
Weight (w/ battery)	2.5 lbs / 1.145 kg
Dimensions	H 5.4" (137 mm), W 4.6 (117 mm), L 8.2" (208 mm)
Housing Material	Ultem® Thermoplastic
Bumper Material	Silicone
Upper Housing Color	Red (standard), Blue, Yellow, Orange, Black, Lime yellow
Lower Housing Color	Black
Form Factor	Ergonomic low-strain grip with intuitive handling and angled display
User Serviceable Pparts	Bumpers, cover window
Software	User upgradable firmware (via Micro-USB)
Imager and Battery Chargers	Wireless Charging System for truck or office use (optional)
Power Source	Lithium-ion rechargeable internal battery
Battery Capacity	6400 mAh
Operating Time	Up to 6 hours 30 minutes at 20° C in routine conditions
Recharge Time	Up to 4 hours 15 minutes to 80%
Cold Resistance 4° F / -20° C	Continued operation
Heat Resistance 300° F / 150° C	15 minutes of continued operation
Heat Resistance 500° F / 260° C	5 minutes of continued operation
Impact Resistance	Functional after 2 meter drop on concrete
Storage Temperature	Recommended from -4° F / -20° C to 104° F / 40° C
Detector Type	Vanadium Oxide Microbolometer
Detector Resolution	640 x 512
Spectral Response	8 µm – 14 µm
Refresh Rate	60 Hz
Dynamic Range	1200 F / 650° C
Pixel Pitch	12 µm
Field of View	40° V x 50° H
Protective Window	Glove cleanable germanium window with anti-reflective convex shape and coating
Size	3.5" (89 mm) Diagonal IPS
Display Brightness	1000 cd/m2
Contrast Ratio	800:1 (typical)
Viewing Angle (Typical)	85° All directions
Image Resolution	640 x 480
Protective Cover	Polycarbonate with a UV and abrasion-resistant surface. User replaceable.
Pixel Density	228 ppi
Gain Modes	Seamless Gain Transition: Shutterless and seamless automatic transition between low and high gain mode dependent on scene temperature.
Colorization	White-Hot, and Super Red Hot (yellow-orange-red gradient) for temperatures above 500° F / 260° C in the default mode or 300° F / 150° in the alternate mode.

Part Number	Includes	Key Items
NXTPRO	NXT PRO IMAGER 1 USB CHARGER	
NXTPROBUNDLE	NXT PRO IMAGER 1 USB CHARGER 1 USB CABLE 1 WIRELESS CHARGER 1 XT RETRACT	
XTCHARGER	WIRELESS TRUCKMOUNT AND STATION CHARGER	
XTCHARGE PWR	AC ADAPTER FOR XTTRUCKMOUNT	
XTUSBCHARGE PWR	AC ADAPTER AND USB CABLE	
XTRETRACT	XT RETRACTABLE LAN- YARD	
XTCHARGERRING	CHARGER INTERFACE RING REPLACEMENT KIT	
XTWINDOW	DISPLAY COVER REPLACEMENT KIT	
XTWINDOWSCREWS	DISPLAY COVER REPLACEMENT SCREWS	
XTLCDGUARDQXTPRO	DISPLAY BOOT REPLACEMENT KIT	
XTBUMPER	FOOT BOOT REPLACEMENT KIT	
XTMETALX	FRONT COVER PLATE	
XTHARDCASE	XT HARD CARRYING CASE	