



TUTTI - ALL

XT FOOD

160/15
180/18
200/15
200/21

NEW



MODULA PLUS - XT FOOD

IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA
PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

MODULA PLUS - IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA


- Struttura chiusa e realizzata in acciaio inox AISI 304
 - Pompe a bielle con pistoni in ceramica, testata in ottone e guarnizioni per alta temperatura (mod. MODULA PLUS) - pompa per alta temperatura serie HT - 85°C (mod. XT FOOD)
 - Motore 1450 rpm
 - Protezione termica del motore
 - Motore ad alto rendimento
 - Trasmissione con giunto flessibile (FJ)
 - Controllo macchina ACDS2
 - Controllo perdite
 - Spegnimento automatico per mancanza d'uso dopo 20 min
 - Led segnalazione «macchina pronta» e «anomalia»
 - Memorizzazione del tempo di utilizzo della macchina con segnalazione led al raggiungimento del periodo di manutenzione programmata
 - Manometro
 - Filtro acqua ispezionabile
 - Predisposizione per staffa aggancio rapido a muro (optional)
 - Predisposizione per controllo remoto (optional)
 - Predisposizione per avvolgitubo (optional)
 - Controllo mancanza acqua con flussostato
- *Enclosed frame constructed in stainless steel AISI 304*
 - *Triplex plunger pump with three brass head and high temperature seals (mod. MODULA PLUS) - high temperature pump HT series - 85°C (mod. XT FOOD)*
 - *1450 rpm motor*
 - *High efficiency motor*
 - *Motor thermal protection*
 - *Motor/pump equipped with flexible joint (FJ)*
 - *(ACDS2) Advanced Control Delayed Stop*
 - *Micro leakage control*
 - *Automatic shutdown if idle for more than 20 min*
 - *Warning led "machine ready" and "malfunction"*
 - *Hour counter device with service alert warning led*
 - *Pressure gauge*
 - *Easy to inspect water filter*
 - *Predisposed for optional quick hook-up wall bracket*
 - *Predisposed for optional with remote control*
 - *Hose reel (optional)*
 - *"No water" control with flow switch*



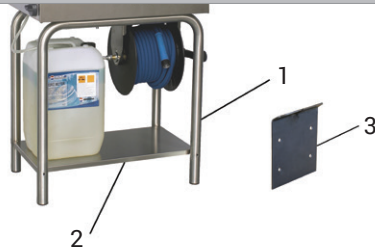
ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

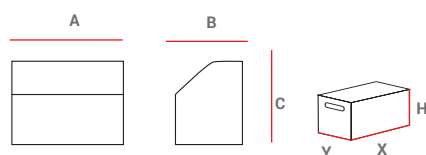
	N°	MOD.	COD.	DESCRIZIONE - DESCRIPTION
	1	Tutti - All	01AC052	Presa Portagomma 3/4" Threaded tap adaptor 3/4"
	2	200/15	I50284	Ugello - Nozzle 1/4"M 25045
		160/15	I50205	Ugello - Nozzle 1/4"M 25055
		150/21	I50273	Ugello - Nozzle 1/4"M 25080
		160/30	I50278	Ugello - Nozzle 1/4"M 25125
		200/21 - 180/18	I50295	Ugello - Nozzle 1/4"M 25065
	3	Tutti - All		Chiave Key

ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

KIT BASIC BASIC KIT	KIT PREMIUM PREMIUM KIT	KIT LUXURY LUXURY KIT
		
Mod. 160/15 - 150/21 - 180/18 Tubo - Hose (R1) Cod. 01AC008 (01AC418(1) + 01AC319(2) + 01AC401(3))	Mod. 160/30 Tubo - Hose (R2 HF - l= 15m) Cod. 01AC024 (01AC422(1) + 01AC419(2) + 01AC502(3)) Mod. 200/15 - 200/21 Tubo - Hose (R2 - l= 10m) Cod. 01AC023 (01AC422(1) + 01AC419(2) + 01AC398(3)) Mod. 160/15 - 150/21 - 180/18 Tubo - Hose (R1 - l= 10m) Cod. 01AC009 (01AC422(1) + 01AC419(2) + 01AC401(3))	Mod. 160/30 Tubo - Hose (R2 HF) Cod. 01AC025 (01AC532(1) + 01AC554(2) + 01AC502(3)) Mod. Tutti i modelli fino a 21 l/min compresi - All models up to 21 l/min included Tubo - Hose (R2) Cod. 01AC010 (01AC532(1) + 01AC554(2) + 01AC5425(3))
AVVOLGITUBO DA PARETE 30m WALL HOSE REEL 30m	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT	CONTROLLO REMOTO REMOTE CONTROL
		
Mod. Tutti-All Cod. 01AC064	Mod. Tutti-All Lancia-Lance (70 cm) Cod. 01AC514 Mod. 150/21 Ugello-Nozzle (075) Cod. 01AC349 Mod. 160/15 Ugello-Nozzle (055) Cod. 01AC347 Mod. 160/30 Ugello-Nozzle (120) Cod. 01AC331 Mod. 200/15 Ugello-Nozzle (045) Cod. 01AC295 Mod. 180/18 - 200/21 Ugello-Nozzle (065) Cod. 01AC297	Mod. Tutti-All kit controllo remoto Remote control kit Cod. 01AC062

MODULA PLUS - IDROPULITRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

SUPPORTI SUPPORTS	KIT VASCHETTA ACQUA CON GALLEGGIANTE FLOATING VALVE WATER TANK KIT	SUPPORTO INOX STAINLESS STEEL RACK
		
Mod. Tutti - All supporto inox - <i>stainless-steel support</i> Cod. 01AC446	Mod. Tutti - All Cod. 01AC063	Mod. Tutti - All Cod. 01AC510
Mod. Tutti - All ripiano inox - <i>stainless-steel shelf</i> Cod. B.CRDS00815		
Mod. Tutti - All piastra aggancio rapido a parete - <i>bracket for quick mounting on wall</i> Cod. B.CRDS00814		
UNITA' RISCALDANTE HEATING UNIT		
		
Vedi pag 95 - See page 95		



PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MODULA PLUS 160/15	695	450	380	70	780	530	610	81
MODULA PLUS 180/18	695	450	380	70	780	530	610	81
MODULA PLUS 200/15	695	450	380	70	780	530	610	81
MODULA PLUS 200/21	695	450	380	84	780	530	610	95
MODULA PLUS 160/30	695	450	380	84	780	530	610	95
MODULA XT FOOD 160/15	695	450	380	70	780	530	610	81
MODULA XT FOOD 150/21	695	450	380	70	780	530	610	81

		160/15	180/18	200/15	200/21	160/30	XT FOOD 160/15	XT FOOD 150/21
codice - code		● 01MOP100	● 01MOP500	● 01MOP300	● 01MOP700	● 01MOP900	● 01MOP100-F	● 01MOP600-F
pressione mas. - max. pressure	[bar] [MPa - psi]	160 16-2.300	180 18-2.600	200 20-2.900	200 20-2.900	160 16-2.300	160 16-2.300	150 15-2.200
portata mas. - max. flow rate	[lt/h]	900	1.080	900	1.260	1.800	900	1.260
pompa - pump		IP 47	IP 47	IP 47	IP 47 N	IP 47	IP 47 HT	IP 47 HT
sistema di arresto - stop system		ACDS2	ACDS2	ACDS2	ACDS2	ACDS2	ACDS2	ACDS2
rotazione pompa - pump speed	[rpm]	1.450	1.450	1.450	1.450	1.450	1.450	1.450
potenza assorbita max - max absorbed power	[Kw]	4,8	6,2	5,8	7,7	8,2	4,8	5,8
alimentazione - supply voltage	[V - ph - Hz]	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50
massima temp. aliment. - max. inlet temp.	[°C]	70	70	70	70	70	85	85