



Twistline Alu 2000 hours

Twistline Alu 2000h 35W GU10 230V 40D 1CT/50

Mains-voltage 50 mm diameter reflector lamp with aluminium reflector

Product data

• General Information

Cap-Base	GU10 [GU10]
Philips Code	na [-]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	40 °
Luminous Flux (Rated) (Nom)	185 lm
Luminous Intensity (Max)	300 cd
Rated Beam Angle	40 °
Colour Temperature, horizontal (Nom)	2800 K
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %
Luminous Flux In 90° Cone (Rated)	185 lm

• Operating and Electrical

Power (Rated) (Nom)	35.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light

Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Bulb Finish	Clear (CL)
-------------	------------

• Approval and Application


Energy Efficiency Label	D
Energy Consumption kWh/1000 h	35 kWh

• Product Data

Full product code	871150065283665
Order product name	Twistline Alu 2000h 35W GU10 230V 40D 1CT/50
EAN/UPC - Product Order code	8711500652836 65283665
Numerator -	1
Quantity Per Pack	50
Numerator - Packs per outer box	
Material Nr. (12NC)	924713444255
Net Weight (Piece)	0.007 kg
ILCOS Code	HAGS-35-230-GU10-51/40

PHILIPS


Dimensional drawing

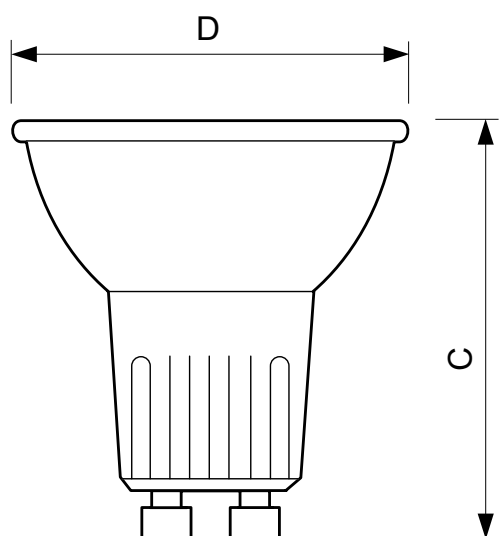

GU10, MR16/PAR20

TWIST Alu 35W GU10 230V 40D

Product	D	C
Twistline Alu 2000h 35W GU10 230V 40D 1CT/50	50.7 mm	51 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change