

4000016787

P-3132

Remote Master Station



DESCRIPTION

- 15 substation/loudspeaker lines, the master station and 3 other remote control units
- Control output for external call signal device
- Integrated microphone and loudspeaker
- Connection for gooseneck or handheld microphone
- Connection for additional, external loudspeaker
- Volume control in front
- Bridge wing extensions
- 12 W output power
- Complies with IEC 60945 Standard for Marine Equipment
- RMRS type approval and compatible with NORSOK

The CIS Remote Master Station P-3132 is a talk-back operator panel for the Command Intercom System. Through the Master Station P-3130 it can remotely talk to all substations, type P-9xxx. It can also communicate directly with the Master Station P-3130 and all other Remote Master Stations, type P-3131 and P-3132. The functionality comprises point-to-point, group and all calls as well as emergency Public Address.

SPECIFICATIONS

MECHANICAL

Dimensions (WxHxD)	192x144x100 mm
Weight	1.5 kg
Color	RAL 9005
Material	Aluminium / PC
Mounting	Flush / Console
Fixing	4 x M4 bolts
Access	Front
Cable Entry	Rear


ELECTRICAL


Power Supply	24 VDC (22-32 VDC)
Frequency Range	300-3400 Hz
Power Consumption	25W (peak), 3W (typical)
Fuse	5x20 mm, 2A T
Heat Dissipation (typical/max)	< 3W / 10W
Termination	Screw terminals $\leq 1.5\text{mm}^2$
Compass Safe Distance	> 2.2 m

ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-22

TECHNICAL DIMENSIONS

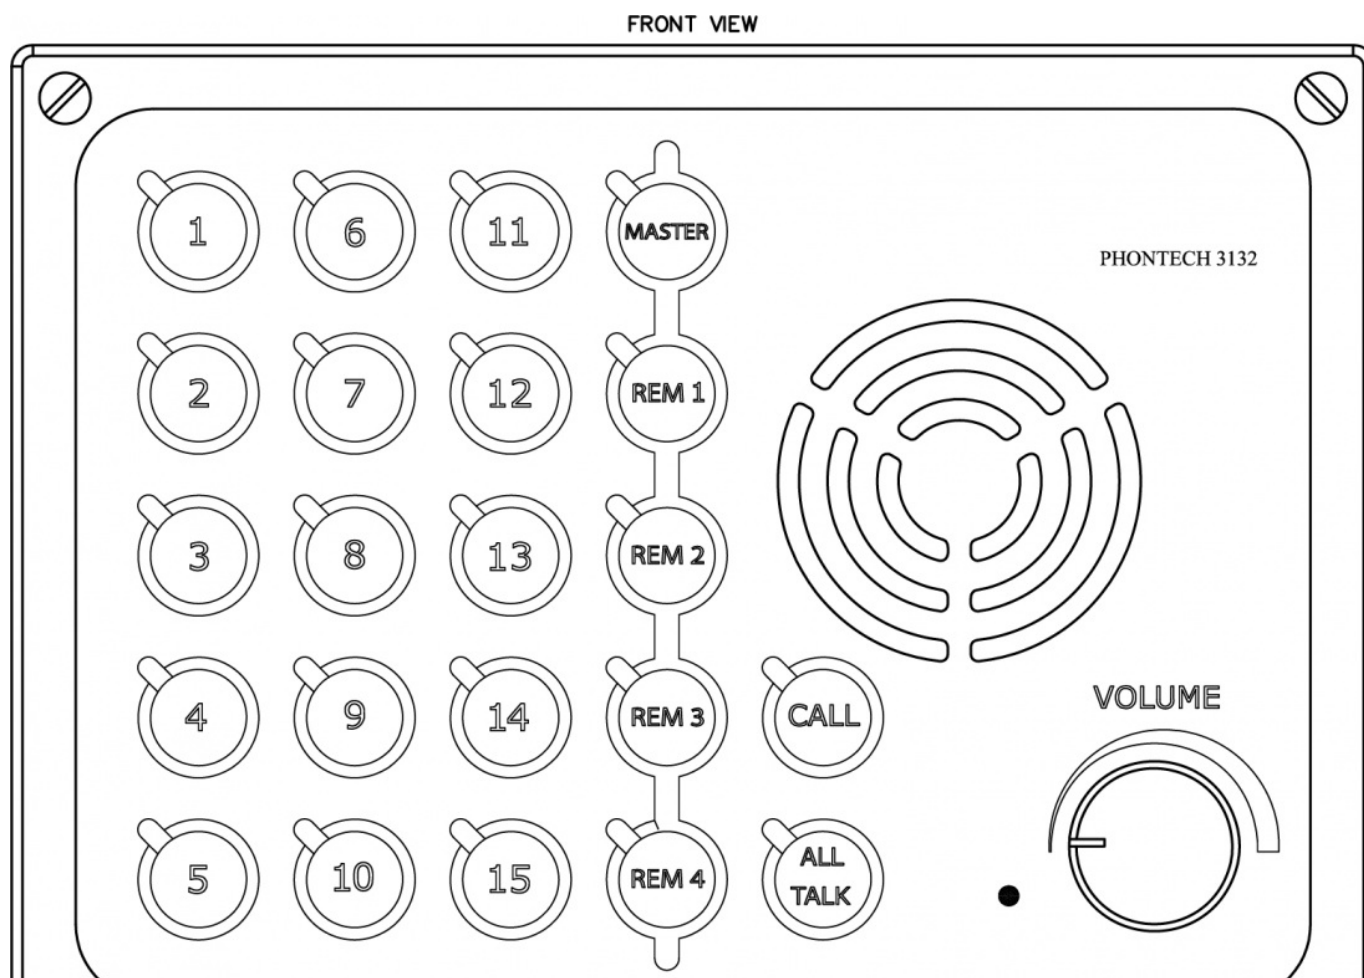

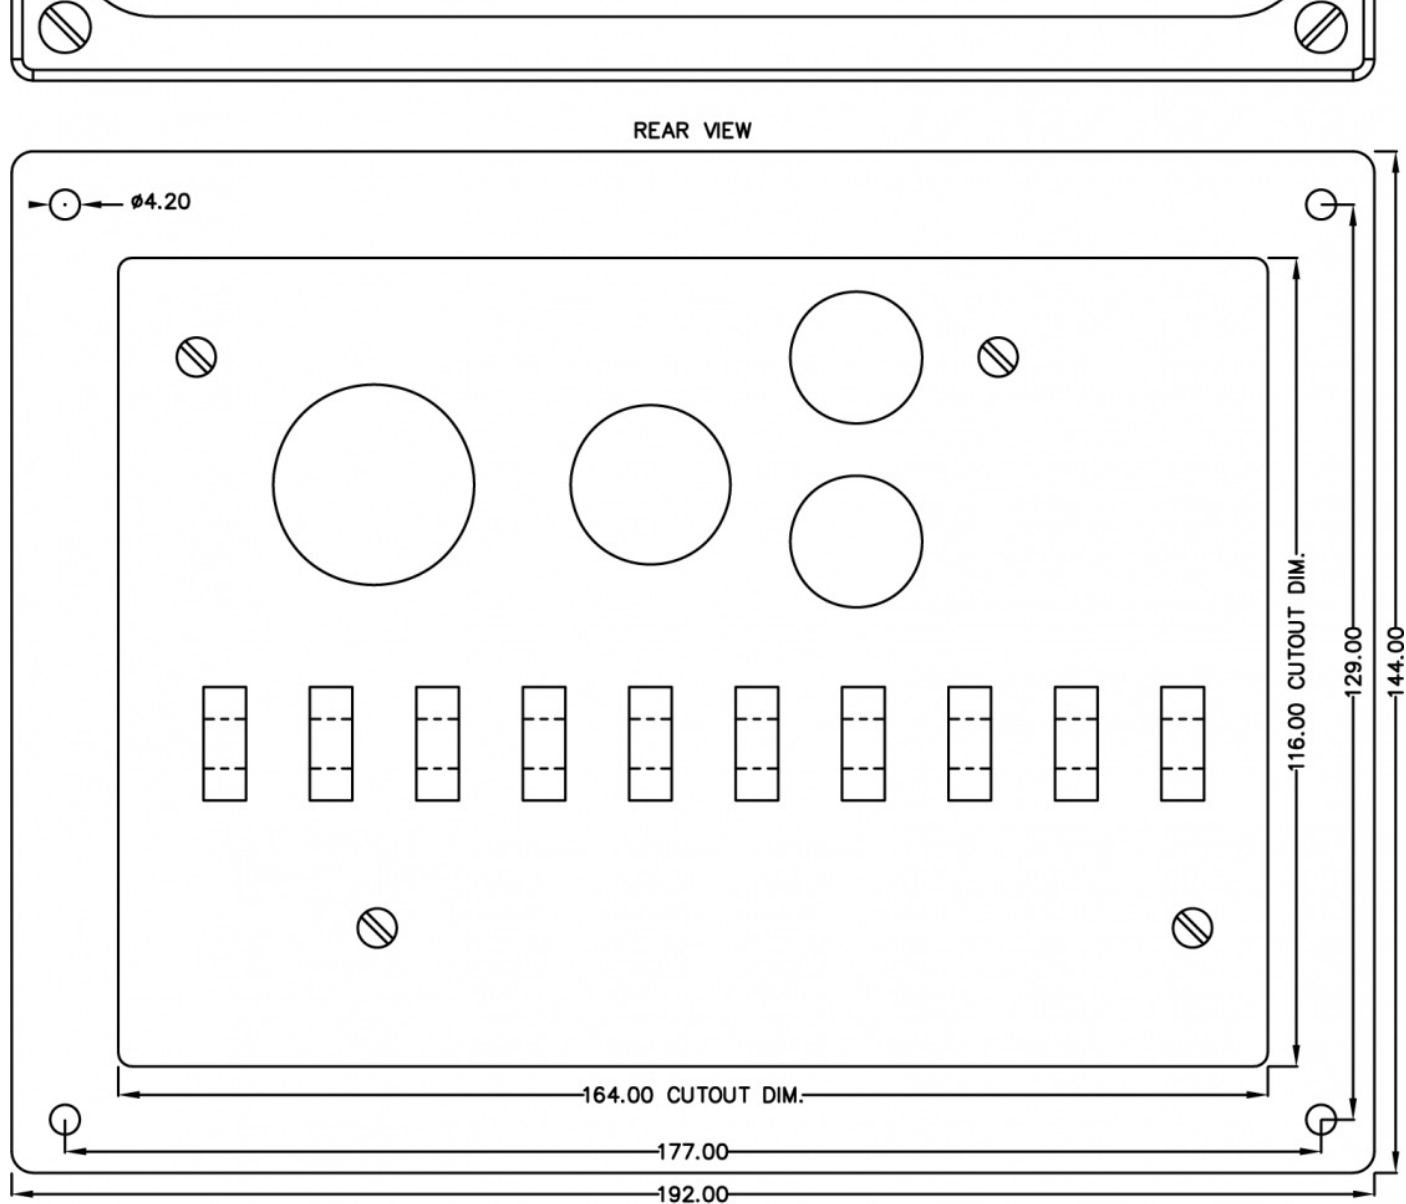

USED WITH



4000016791

P-3130

CIS Master Station