

1020600931

VSP-211-L

Main Station - Batteryless Telephone System - 12-Way



DESCRIPTION


- 12 extensions selector switch
- Equipped with the built-in system amplifier w/capacitor battery
- Terminals for auxiliary 24VDC when used as Common Battery Telephones.
- To avoid noise problems, the 24VDC must be supplied via a DC / DC converter
- Flush mounted
- Wall mounting with corresponding metal cabinet type MBOKS
- Desk mounting with corresponding wooden cabinet type VSPK
- Suitable for installation in wheelhouse or control room

SPECIFICATIONS

GENERAL

Connections	Screw terminals Color
Color	Black
IP rating	IP-44 (in console)
Dimensions (WxHxD)	238 x 205 x 137 mm (w/ handset and built-in depth)
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C

TECHNICAL DIMENSIONS

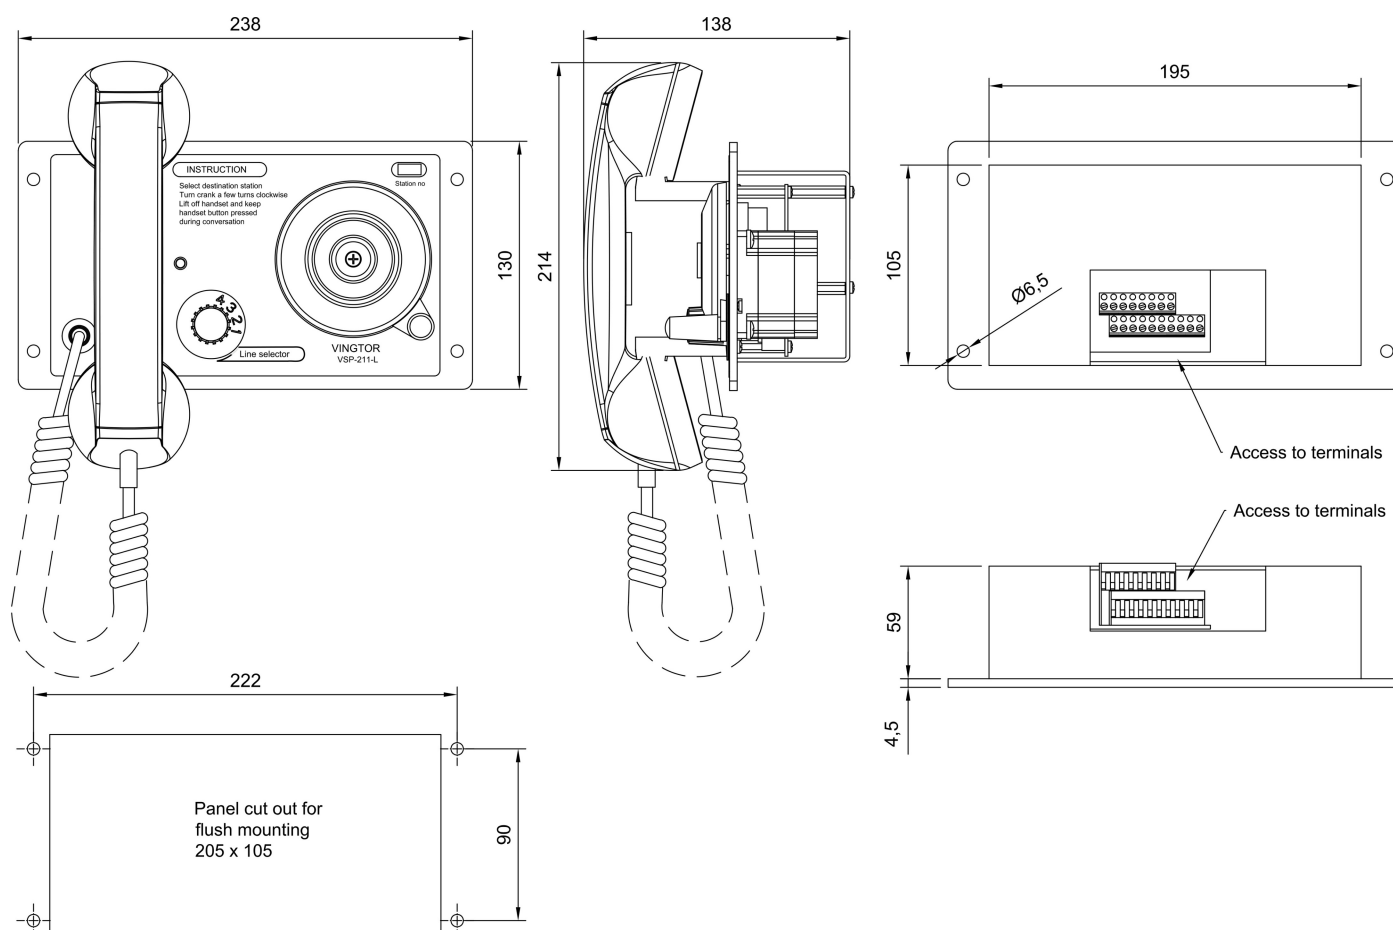

ACCESSORIES



MBOKS

Item Number: 3006090478



VSPK

Item Number: 3006200049



VSP-36-PEL

Item Number: 1020600751



VSP-36-PELP

Item Number: 1020600761



CD-4

Item Number: 1020159000



IRR-24

Item Number: 3006202045



IRR-VSP-220

Item Number: 1020600995