

3006200025

VSP-211M-L

Main Station - Batteryless Telephone System 20-Way



DESCRIPTION


- 20 extension system
- 2 positions group selector switch
- 10 extension line selector switch
- Built-in system amplifier w/ capacitor battery
- Has terminals for auxiliary 24V DC when used as Common Battery Telephones.
- To avoid noise problems, the 24V DC must be supplied via a DC/DC converter
- LED call indication in front
- Flush mounted
- Wall mounting with corresponding metal cabinet type MBOKS
- Desk mounting with corresponding wooden cabinet type VSPK
- Suitable for installation in wheelhouse and control room

SPECIFICATIONS

GENERAL

Connections	Screw terminals
Color	Black
IP rating	IP-44
Dimensions	238 x 205 x 137 mm (w/ handset and built-in depth)
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C

TECHNICAL DIMENSIONS

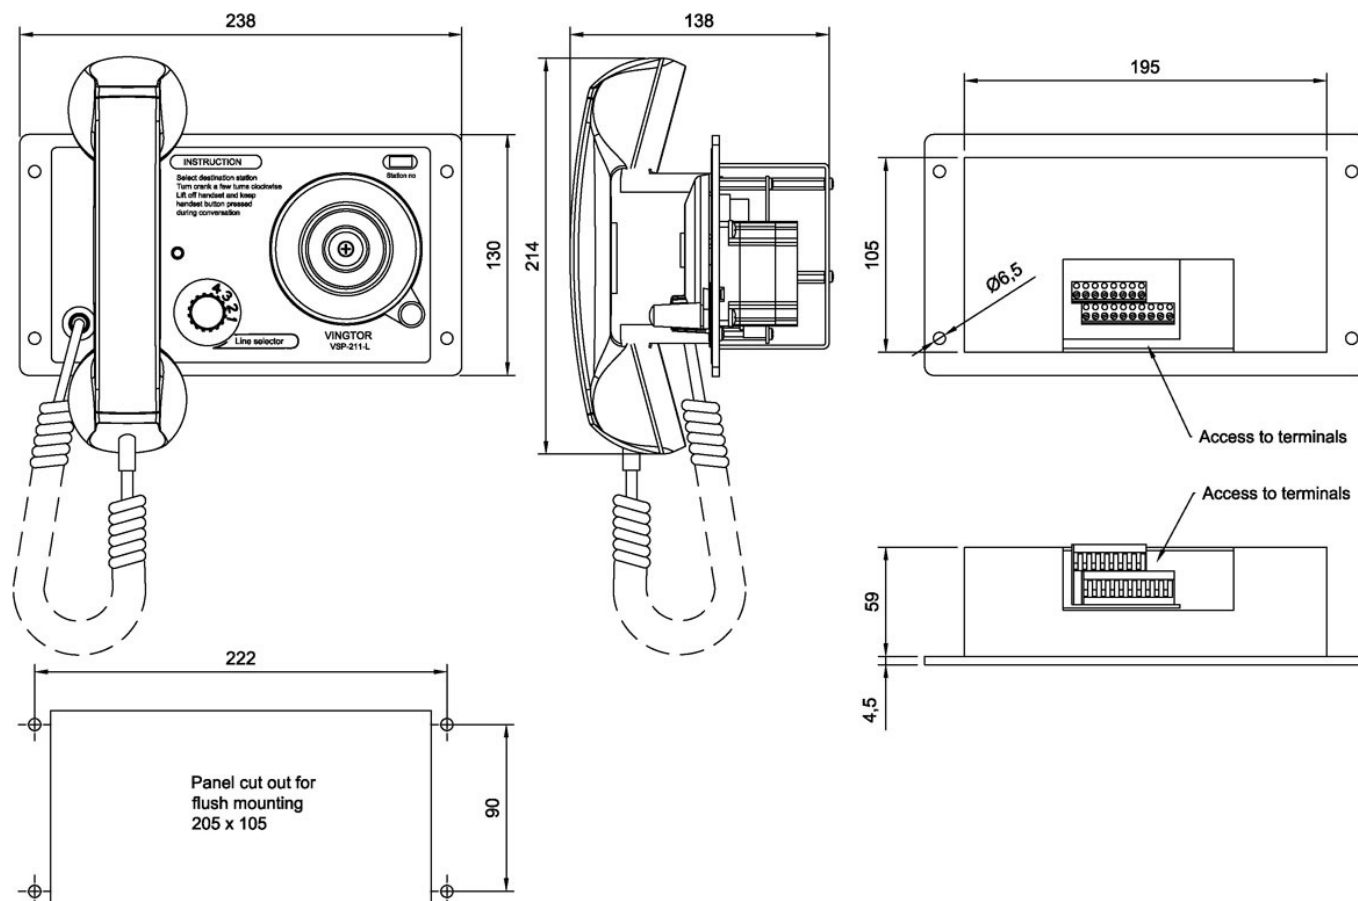

ACCESSORIES



MBOKS

Item Number: 3006090478



VSPK

Item Number: 3006200049



CD-4

Item Number: 1020159000



VSP-36-PEL

Item Number: 1020600751



VSP-36-PELP

Item Number: 1020600761



IRR-VSPM-24

Item Number: 3006200005



IRR-VSPM-220

Item Number: 3006200004