

3006200028

VSP-212M-L

Main Station Panel Mounted with Relay 20-Way



DESCRIPTION


- 20 stations system
- 2 positions group selector switch
- 10 position line selector switch
- Built-in relay latch timer for activation of external visible or audible 24VDC signal units
- Alarm stop button
- Noise compensated microphone
- Optical LED call indication at front (in addition to audible call signal)
- Flush mounted
- Wall mounting with corresponding metal cabinet type MBOKS
- Desk mounting with corresponding wooden cabinet type VSPK

SPECIFICATIONS

GENERAL

Connections	Screw terminals
Colour	Black
IP rating	IP-44
Dimensions	238 x 130 x 77 mm
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C

TECHNICAL DIMENSIONS

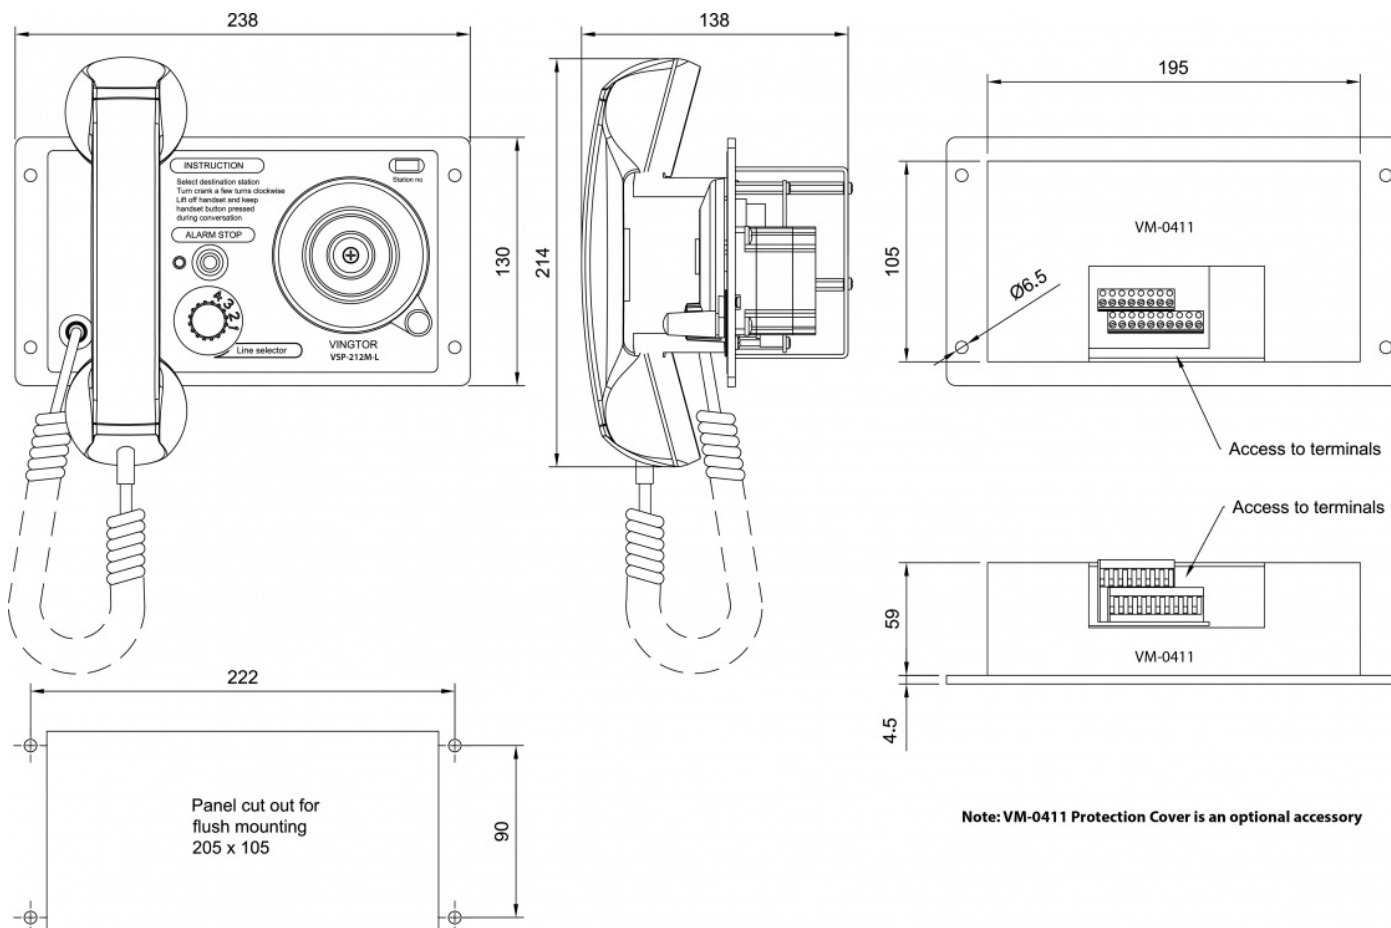

ACCESSORIES



VM-0411

Item Number: 3006090492



MBOKS

Item Number: 3006090478



VSPK

Item Number: 3006200049



CD-4

Item Number: 1020159000



VSP-36-PEL

Item Number: 1020600751



VSP-36-PELP

Item Number: 1020600761



IRR-VSPM-24

Item Number: 3006200005



IRR-VSPM-220

Item Number: 3006200004