

3006200030

VSP-22M

Main Station- Watertight 20-Way



DESCRIPTION

- 20 extension system
- 2 position group selector
- 10 position line selector
- Wall mount
- Waterproof housing for use at bridge wings and open deck areas

SPECIFICATIONS

GENERAL

Connections	Screw terminals
Housing	ROSE Box (AlSi12)
Handset	RA-250 w/holder
Color	Grey RAL7001 / Handset black
IP rating	IP-65
Operating temperature range	-25°C to 55°C
Weight	2.4 kg
Dimensions (WxHxD)	220 x 120 x 185 mm (with handset)

Created: 28.07.2014, updated: 13.05.2020

page 1/2


www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.

TECHNICAL DIMENSIONS

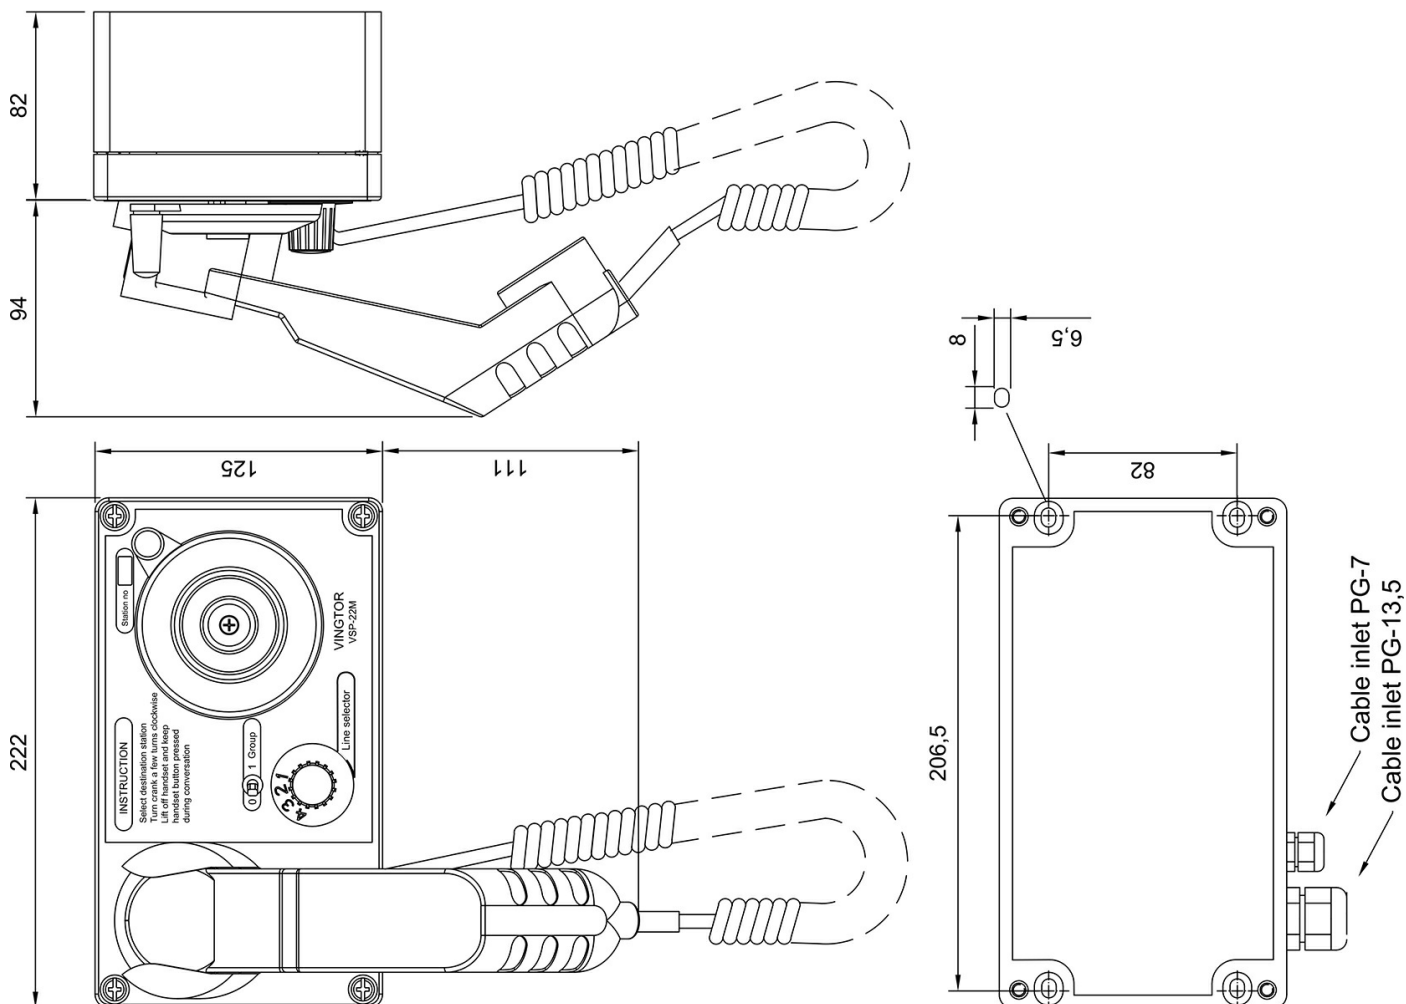

ACCESSORIES



CD-16

Item Number: 1020600982



CD-4

Item Number: 1020159000



VSP-36-PEL

Item Number: 1020600751



VSP-36-PELP

Item Number: 1020600761



IRR-VSPM-24

Item Number: 3006200005



IRR-VSPM-220

Item Number: 3006200004