



XJ CUP HOLDER

INSTALLATION INSTRUCTIONS

XJ 84-96

P/N XJ-001

MADE IN SWEDEN

Notes on the Installation

Estimated installation time: 1 hours

General Installation Information

The Falken Fabrication XJ Cup holder is designed to fit the pre-facelift XJs - manufactured between 1984-96 - which lacks cupholders altogether.

Installation - if removing the center console trim from Jeep - will be about one hour. It is possible to install the cup holder removing only the uppermost trim but access to inserting the nuts is easier if you remove the bottom part of the trim as well. The instructions does not include details on removing the trims as this is readily available within the Jeep community online. Try Googling "Jeep XJ removing center console".

As always it is worthwhile to read through the instructions to familiarize yourself with the procedure before beginning. Further tips are to take it nice and easy and keep your head cool as you will be rewarded with a cleaner, better looking installation. Also please check to see that all parts were included in the package as per the photo below.

As always, if in doubt about any part of the installation please feel free to reach out for advice. You can find our up to date contact details on the webpage.

Good luck and hope you will enjoy your new Falken Fab product as much as we do!!

www.falkenfabrication.com

What's in the Box

- 1x Cup Holder
- 1x Space Plate
- 2x M5 Allen Bolts
- 2x Washers
- 2x Locking Nuts



Installation Instructions


Step 1: Prepare Center Console

Remove either just the topmost part of the center console or also the undermost for easier access to nuts. Removing both is fairly straight forward involving removing the gear shift handle and a few screws. We will update with photo instructions once we get a chance. In the meanwhile please Google "Jeep XJ removing center console" if you run into trouble. (Pic 1)



Step 2: Mark the position of the Cup Holder

With the top part of the console in place, insert the tabs of the cup holder into the two slots right next to the gear shift bezel. Draw four lines along the four edges so that you have a reference for the holes as per Pic 1. (Pic 2)

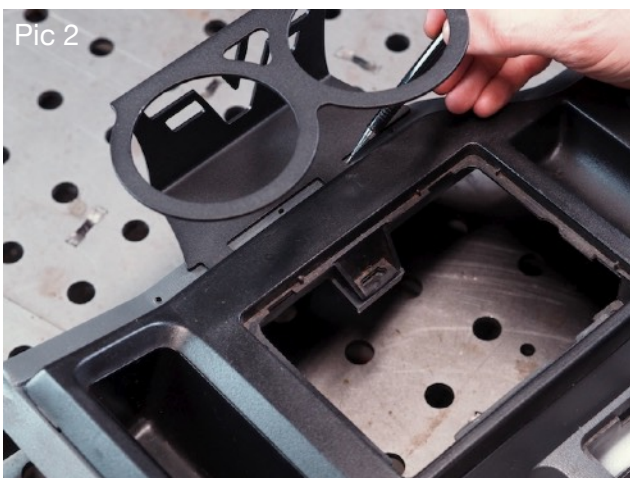


Step 3: Drill mounting holes

Remove the cup holder and top of the console. Mark the position of the holes 87 mm from the outer edge as per Pic 2. To make sure the spacing of the two holes are correct the cc between them is 76mm, or you can simply use the cupholder as a reference. Remember to measure twice, or you'll end up with more than two holes, as we did in the picture... Drill the holes out to 6mm. (Pic 3)



Step 4: Mount Cup Holder to Center Console

Mount the cupholder to the undermost part of the console. Remember to install the small plate as per photo to even out the resting surface of the cup holder. The M5 bolt is on top and the washer and lock nut under the console. (Pic 4)

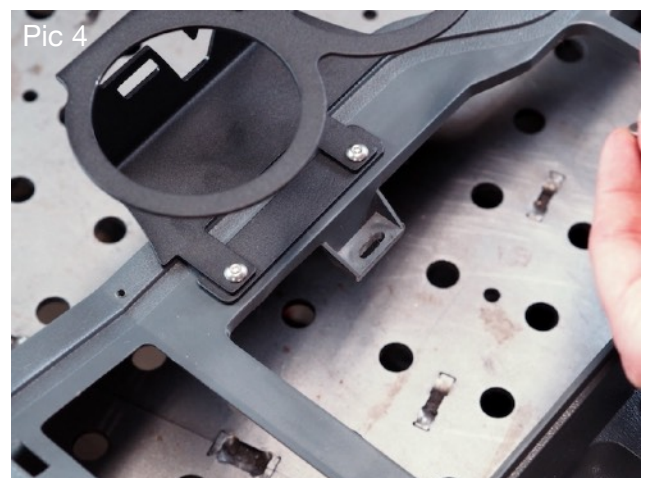

Step 5: Installing Console back in Jeep

Mount the console back into the Jeep. Normally we always recommend a cold beer after a successful install, but since this product is for in car use you can only have a soda. Sorry... (Pic 5)

