




He calibrated leak with isolation valve, leak rate between 5 and 8 · 10⁻⁶ mbar l/s, 250 cc stainless steel reservoir, DN 25 ISO-KF

He calibrated leak with isolation valve, leak rate between 5 and $8 \cdot 10^{-6}$ mbar l/s, 250 cc stainless steel reservoir, DN 25 ISO-KF

Dimensions

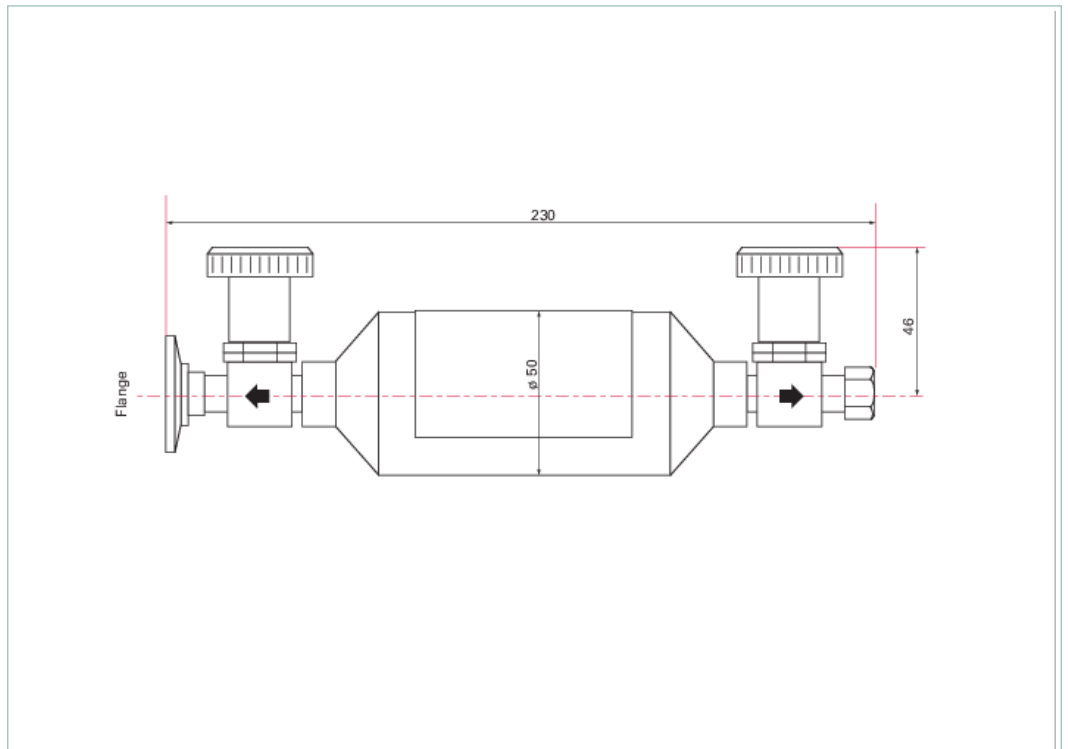

Order number

He calibrated leak with isolation valve, leak rate between 5 and $8 \cdot 10^{-6}$ mbar l/s

FV4510

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

