



Butterfly Valve, Manually Actuated, DN 25 ISO-KF




Similar Image

Butterfly Valve, Manually Actuated, DN 25 ISO-KF

- Swivel valve plate with FKM seal
- Service life: 3000 operating cycles
- Valve position indicated by T-handle
- Nearly free clearance in open position
- Double valve head seal made from FKM

Dimensions

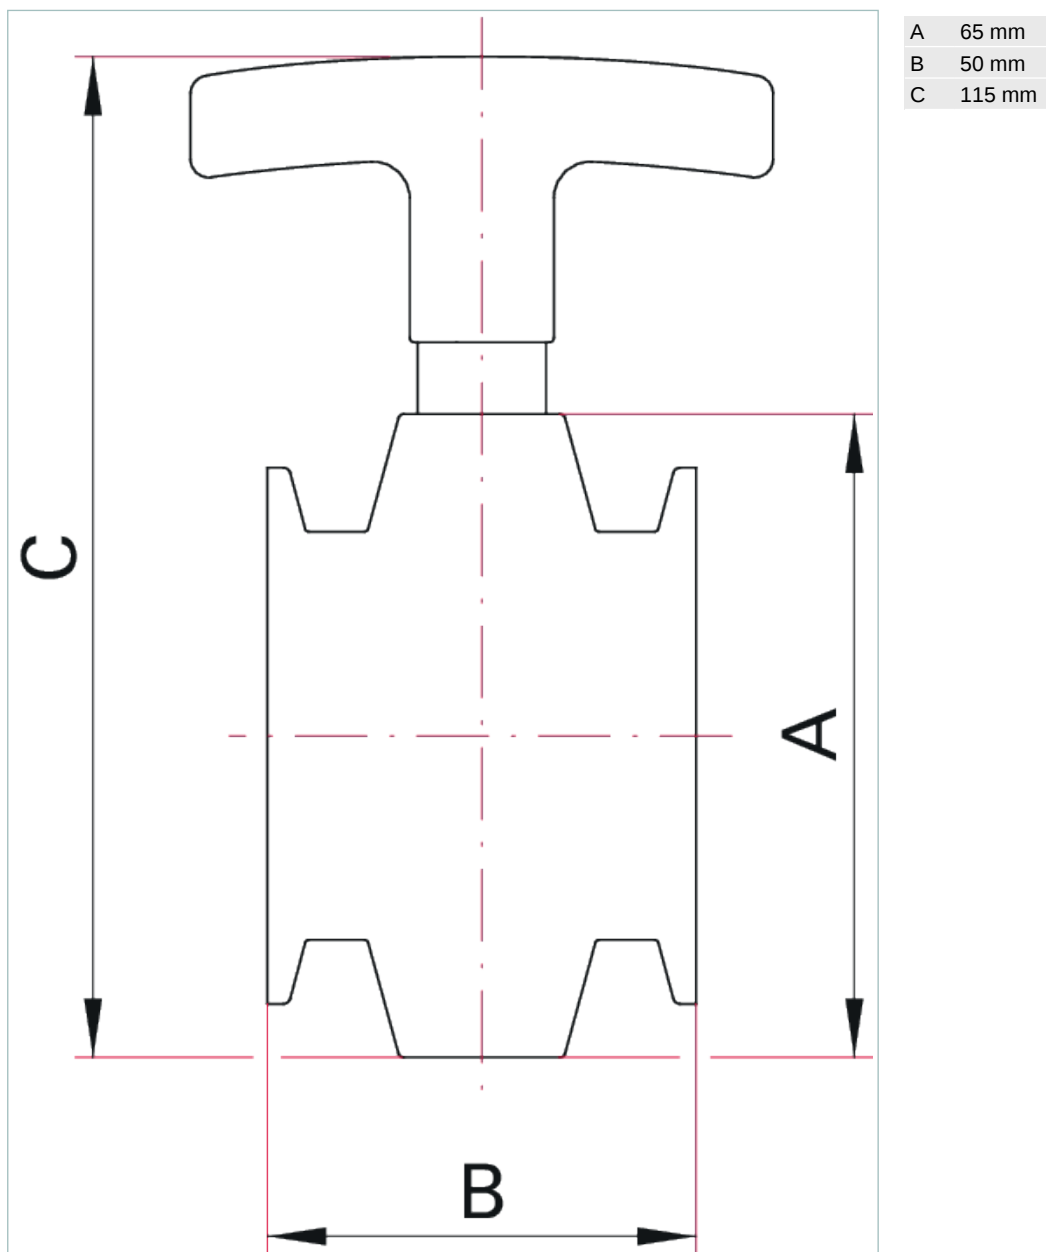

Technical Data	Butterfly Valve, Manually Actuated, DN 25 ISO-KF
Housing	Stainless steel
Nominal diameter	DN 25 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa to ambient pressure

Technical Data		Butterfly Valve, Manually Actuated, DN 25 ISO-KF	
Seal		FKM	
Temperature range		-15 to 130 °C	
Tightness		1 · 10 ⁻¹⁰ Pa m³/s 7.5 · 10 ⁻¹⁰ Torr l/s 1 · 10 ⁻⁹ mbar l/s	
Type		Butterfly valve	
Weight		0.3 kg 0.66 lb	
Order number			
Butterfly Valve		120VSM025	

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

