



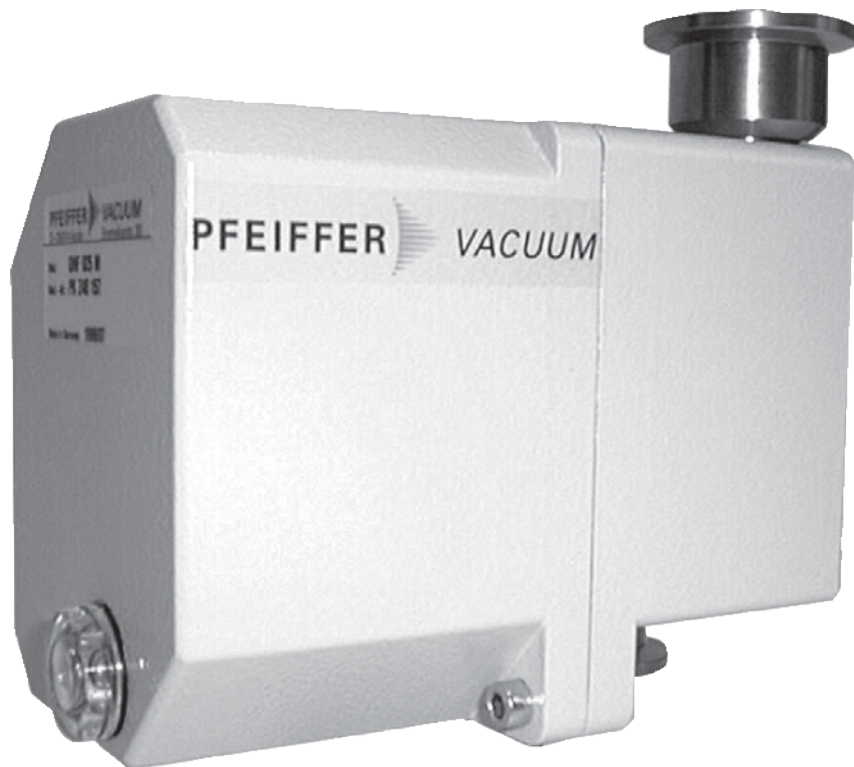

ZF0 16, zeolite trap



Similar Image

ZFO 16, zeolite trap

- Prevents operating fluid backflow on the intake side

Technical Data	ZFO 16, zeolite trap
Conductance at $1 \cdot 10^{-2}$	0.3 l/s
Conductance at 100 hPa	31 l/s
Conductance at 1 hPa	0.7 l/s
Filling quantity	0.5 l
Flange (in)	DN 16 ISO-KF
Flange (out)	DN 16 ISO-KF
For pumping speed up to	5 m ³ /h 2.94 cfm 83.33 l/min
Heating rod	No
Mounting orientation	0° (HV flange top) - 90°
Weight with contents	1.5 kg 3.31 lb

Order number	
ZFO 16	PK Z70 003

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

