



ASM 340, 200/240 V and European power cable, configurable I/O interface board, Ethernet




Similar Image

ASM 340, 200/240 V and European power cable, configurable I/O interface board, Ethernet

- Powerful rotary vane pump with 15 m³/h backing pump capacity
- 2.5 l/s helium pumping speed
- 200/240 V operating voltage, European power cable
- Customizable and detachable operator interface
- Integrated SD card for data processing
- Fully configurable I/O interface (37 pins D-Sub) to fit to customer needs
- Ethernet Communication
- Wired or wireless remote control and sniffer probes available as accessories

Dimensions

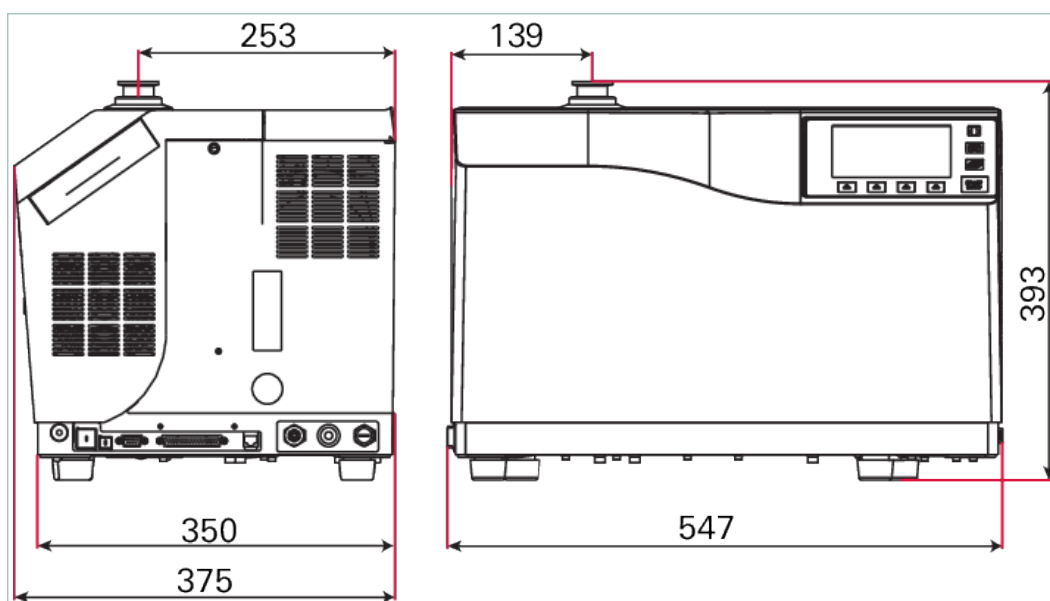

Technical Data	ASM 340, 200/240 V and European power cable, configurable I/O interface board, Ethernet
Backing pump capacity	15 m ³ /h
Detectable gases	⁴ He, ³ He, H ₂
Flange (in)	DN 25 ISO-KF
I/O interfaces	6 Digital inputs (Allocated functions configurable); 3 Analog outputs (Configurable : Helium signal log, Mantissa, Exponent, Inlet pressure); 5 Relays outputs (Allocated functions configurable); 4 Transistor/open collector outputs (Allocated functions configurable)
Interfaces	RS-232, USB, Ethernet
Max. inlet test pressure	25 hPa
Minimum detectable leak rate for helium (sniffing leak detection)	5 · 10 ⁻¹⁰ Pa m ³ /s
Minimum detectable leak rate for helium (vacuum leak detection)	5 · 10 ⁻¹³ Pa m ³ /s
Noise level	54 dB(A)
Operating temperature (hard vacuum test)	0-45 °C
Operating temperature (sniffing test)	0-35 °C
Power consumption max.	850 W

Technical Data		ASM 340, 200/240 V and European power cable, configurable I/O interface board, Ethernet
Protection category		IP20
Pumping speed for He		2.5 l/s
Start-up time (20°C) without calibration		~ 3 min
Supply		200-240 V, 50/60 Hz
Test method		Vacuum and sniffing leak detection
Warranty: Year(s)		2
Weight		56 kg 123.46 lb

Order number	
ASM 340	JSVA00A4MH9A

Accessories	
Country-specific power cables	
Power cable, 2.5 m, Switzerland	103718
Power cable, 2.5 m, UK	104411
Power cable, 2 m, Italy	104758
Inlet filters	
Inlet filter, 5 µm, DN 25/25 ISO-KF	105844
Standard remote control	
Remote control, leak rate in mbar l/s, legend in English	106688
Remote control, leak rate in Pa m³/s, legend in English	108880
Remote Control RC 500 WL for helium leak detector, wireless	PT 445 432 -T
Helium spray gun	
Helium spray gun "Elite-Kit", spray gun with additional accessories in a compact case	109951
Helium spray gun, standard	112535
Miscellaneous	
Profibus board for ASM 340	122253
Exhaust connector for external oil mist eliminator - DN 25 ISO-KF	122405
Compatibility module, I/O HLT 5xxx	122742
37 pin D-Sub/25 pin D-Sub adaptor cable	A333758
Transport cart	
Transport cart, 2 wheels, for ASM 340	122570
Cables to connect an external gauge to an ASM 340 equipped with 37 pin I/O board	
Cable for external gauge, 3 m	A333746
Cable for external gauge, 10 m	A333747
Cable for external gauge, 20 m	A333748
Smart Sniffer probe	
LP 503, sniffer probe with standard tip, 3 m	BG 449 207 -T
LP 505, sniffer probe with standard tip, 5 m	BG 449 208 -T
LP 510, sniffer probe with standard tip, 10 m	BG 449 209 -T
Bypass option	
Bypass option with Euro-style safety plug	PT 445 411 -T
Sniffer probe	
Sniffer probe, 5 m hose length, rigid 9 cm nozzle	SNC1E1T1
Sniffer probe, 10 m hose length, rigid 9 cm nozzle	SNC2E1T1

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.