



Diaphragm Valve, Manually Actuated, DN 25 ISO-KF




Similar Image

Diaphragm Valve, Manually Actuated, DN 25 ISO-KF

- Robust vacuum valve for venting, rough-metering and locking
- Service life: 100000 operating cycles
- The membrane seals the valve seat and the housing
- With visual indication of open and closed positions

Dimensions

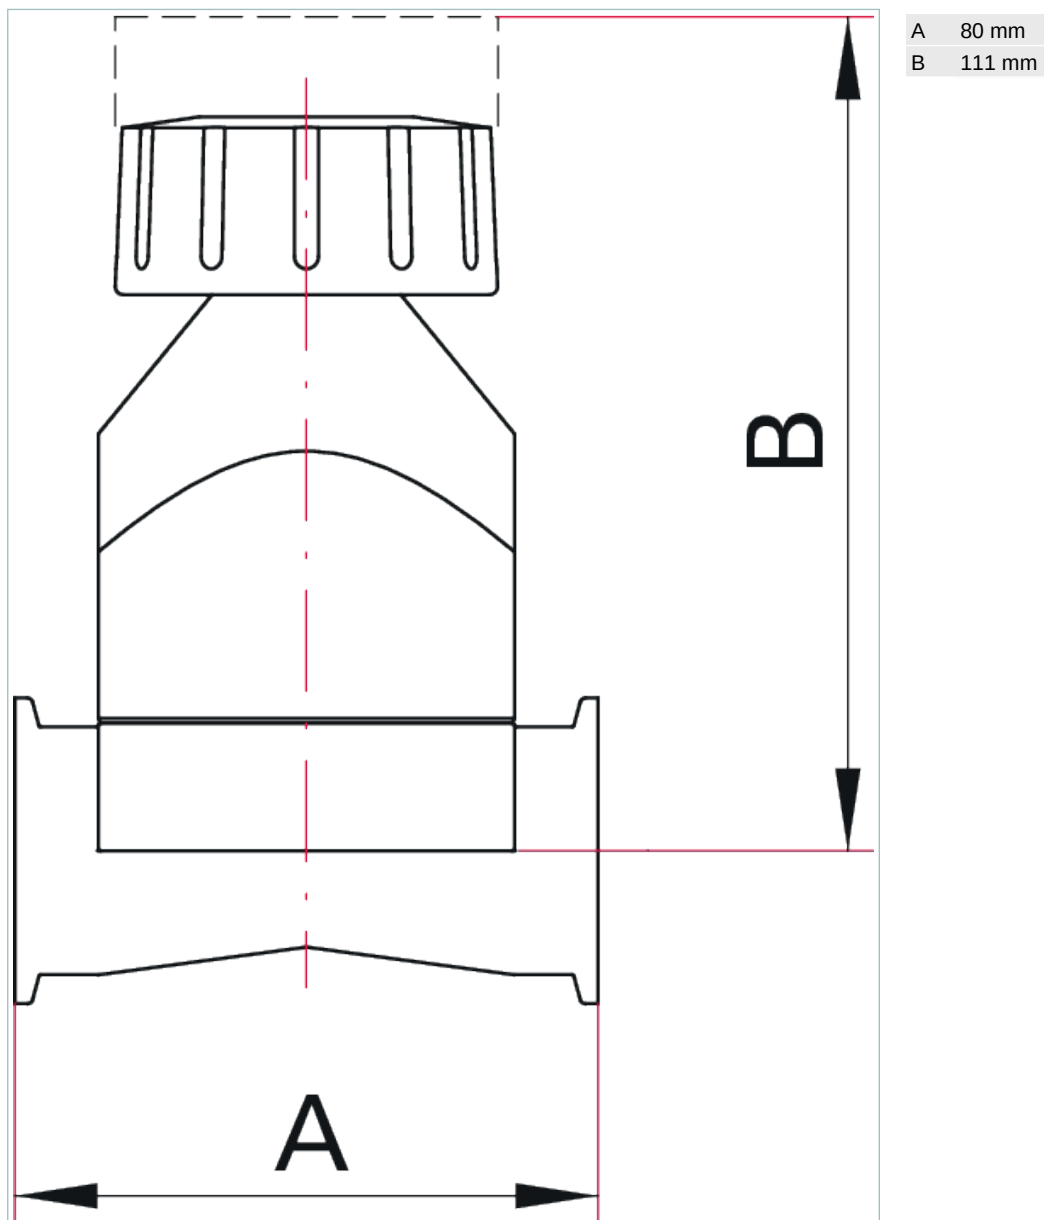

Technical Data	Diaphragm Valve, Manually Actuated, DN 25 ISO-KF
Actuator	Spindle °C
Bakeout temperature: actuator	50 °C 122 °F 323 K
Bakeout temperature: housing	100 °C 212 °F 373 K
Conductance	5 l/s
Conductance for molecular flow	5 l/s

Technical Data		Diaphragm Valve, Manually Actuated, DN 25 ISO-KF
Housing		Aluminum
Nominal diameter		DN 25 ISO-KF
Pressure range		$1 \cdot 10^{-7}$ hPa to 5000 hPa (abs.)
Seal: Valve plate		FKM
Tightness		$1 \cdot 10^{-10}$ Pa m ³ /s $7.5 \cdot 10^{-10}$ Torr l/s $1 \cdot 10^{-9}$ mbar l/s
Type		Diaphragm valve

Order number	
Diaphragm Valve	110VME025

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

