



OmniControl 001 Mobile, control units




OmniControl 001 Mobile, control units



- Universal control unit for all products with Pfeiffer Vacuum RS-485 protocol
- Easy to operate on 3.5" touchscreen display
- Uncomplicated data acquisition and processing between Pfeiffer Vacuum units
- The respective modules define the scope of functions

Dimensions

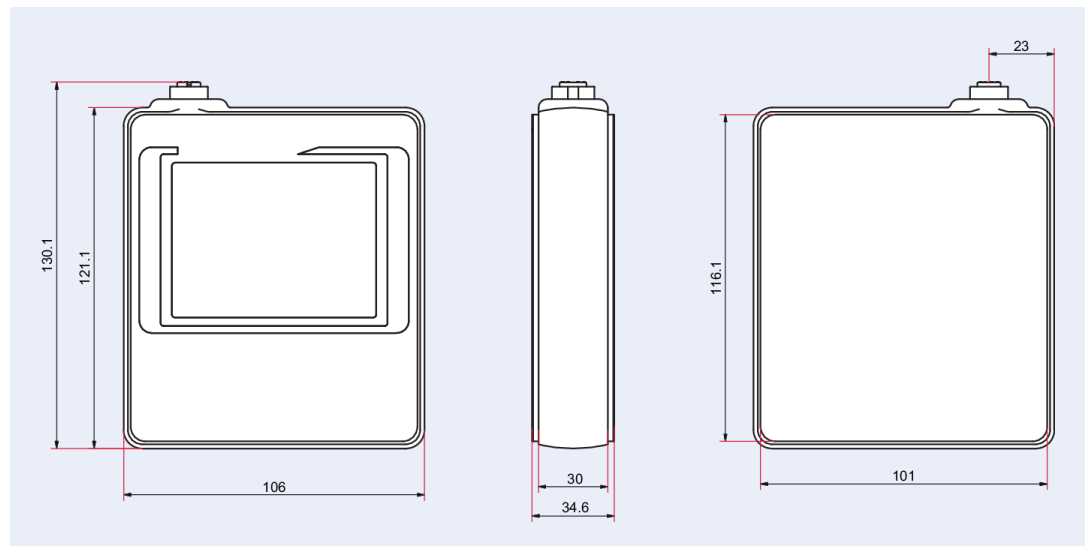

Technical Data	OmniControl 001 Mobile, control units
Protection degree	IP20
Ambient temperature, max.	50 °C
Ambient temperature, min.	0 °C
Operating instructions	PT0820
Ambient temperature	0 – 50 °C
Operating voltage: DC	24 V
Input voltage(s)	24 V DC
Ambient temperature, max.	50 °C 122 K -223.15 °F
Ambient temperature, min.	0 °C 32 K -273.15 °F
Weight	0.3 kg 0.66 lb
Power consumption max.	18 W
Weight	300 g

Order number	OmniControl 001 Mobile, control units
OmniControl 001 Mobile, control units	PE D21 000 0

Your Success. Our Passion.

We give our best for you every day –
worldwide!

Are you looking for an optimum vacuum solution?

Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 4/5/2024

Follow Us On Social Media
#pfeiffervacuum



PFEIFFER  **VACUUM**

www.pfeiffer-vacuum.com