




SplitFlow™ 50 with TC 110, DN 63 ISO-K




Similar Image

SplitFlow™ 50 with TC 110, DN 63 ISO-K

- Small yet powerful turbopump based on HiPace technology
- With a pumping speed up to 53 l/s for N₂ at the high vacuum flange and 0,15 l/s at interstage pumping
- Integrated TC 110 drive electronics
- For installation in any orientation
- Ideal for analytical applications such as leak detection and mass spectrometry
- Extensive accessories expand the range of applications

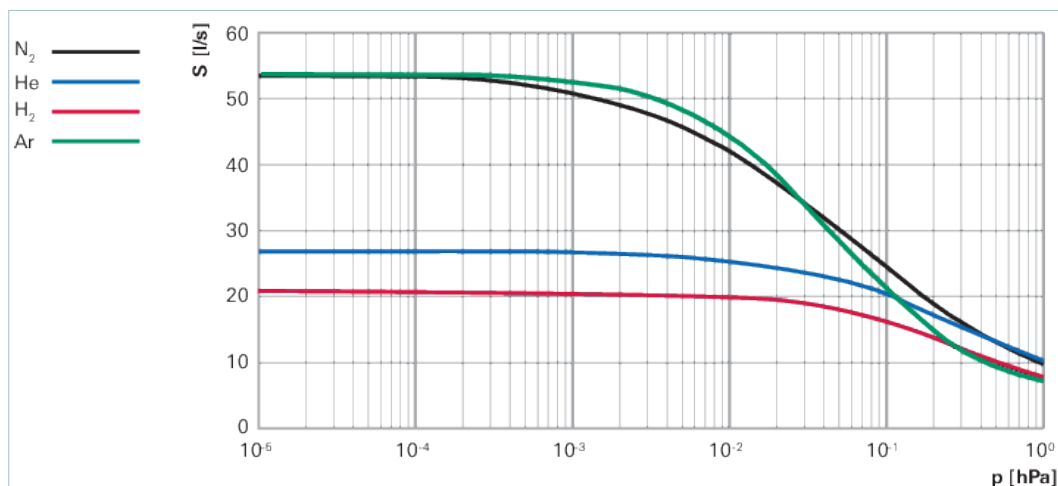

Dimensions

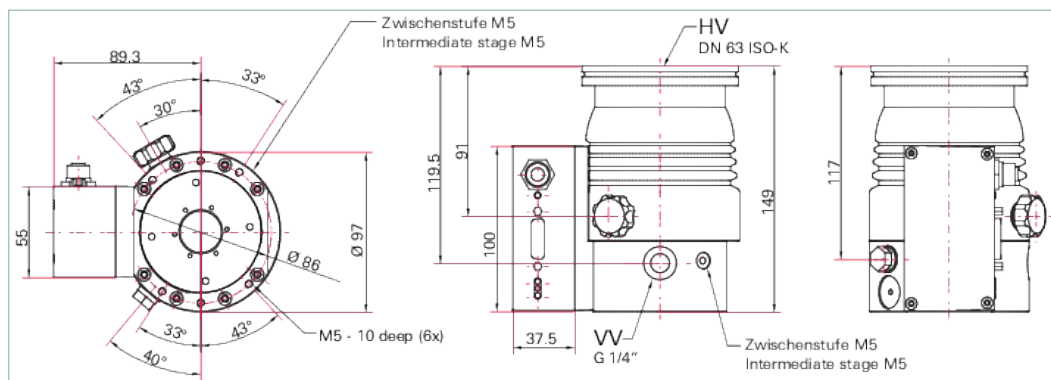

Technical Data	SplitFlow™ 50 with TC 110, DN 63 ISO-K
Bearing	Hybrid
Compression ratio (interstage pumping/fore-vacuum) for Ar	$1.5 \cdot 10^3$
Compression ratio (interstage pumping/fore-vacuum) for H ₂	$2 \cdot 10^1$
Compression ratio (interstage pumping/fore-vacuum) for He	$5 \cdot 10^1$
Compression ratio (interstage pumping/fore-vacuum) for N ₂	$9 \cdot 10^2$
Compression ratio for Ar	$2.1 \cdot 10^{10}$
Compression ratio for H ₂	$1.3 \cdot 10^6$
Compression ratio for He	$1.8 \cdot 10^6$
Compression ratio for N ₂	$1 \cdot 10^8$
Cooling method, optional	Air/Water

Technical Data	SplitFlow™ 50 with TC 110, DN 63 ISO-K
Cooling method, standard	Convection
Cooling water flow	75 l/h
Cooling water flow, max	75 l/h
Cooling water flow, min	75 l/h
Cooling water temperature	5-25 °C 41-77 °F 278-298 K
Current max.	4,6 A
Electronic drive unit	TM 700
Flange (in)	DN 63 ISO-K
Flange (interstage pumping)	M5
Flange (out)	G 1/4"
Fore-vacuum max. for N ₂	20 hPa 15 Torr 20 mbar
Gas throughput at full rotational speed for Ar	0.46 hPa·l/s
Gas throughput at full rotational speed for H ₂	110 hPa·l/s
Gas throughput at full rotational speed for He	7.3 hPa·l/s
Gas throughput at full rotational speed for N ₂	1.8 hPa·l/s
I/O interfaces	RS-485, Remote
Mounting orientation	Any
Operating voltage: V DC	24 (± 5 %) V DC
Permissible magnetic field max.	5 mT
Power consumption max.	110 W
Protection category	IP54
Pumping speed (interstage pumping) for Ar	0.13 l/s
Pumping speed (interstage pumping) for H ₂	0.3 l/s
Pumping speed (interstage pumping) for He	0.16 l/s
Pumping speed (interstage pumping) for N ₂	0.15 l/s
Pumping speed for Ar	53 l/s
Pumping speed for H ₂	21 l/s
Pumping speed for He	27 l/s
Pumping speed for N ₂	53 l/s
Rotation speed ± 2 %	49,000 rpm 49,000 min ⁻¹
Run-up time	1.3 min
Sound pressure level	≤48 dB(A)
Ultimate pressure according to PNEUROP	< 4 · 10 ⁻⁷ hPa < 3 · 10 ⁻⁷ Torr < 4 · 10 ⁻⁷ mbar
Ultimate pressure without gas ballast	4 · 10 ⁻⁷ hPa 3 · 10 ⁻⁷ Torr 4 · 10 ⁻⁷ mbar
Venting connection	G 1/8"
Weight	2.3 kg 5.07 lb
Order number	
SplitFlow™ 50	PM P04 340

Accessories	
Adapters (electrical) RS-232/485	
Y-Connector M12 to RS-485	P 4723 010
USB converter to RS-485 interface	PM 061 207 -T
Cables Backing pump control cables	
HiPace – ACP connection cable	PM 071 142 -X
Cables Connection cables	
Connection cable with RS-485 interface for TC 110/120 to power supply pack	PM 061 350 -T
Connection cable with RS-485 interface and 2 accessory ports for TC110/120 to power supply pack	PM 061 351 -T
Connection cable with RS-485 interface and 3 accessory ports for TC110/120 to power supply pack	PM 061 512 -T
Cables Mains cables / Power cords	
Mains cable 230 V AC, CEE 7/7 to C13, 3 m	P 4564 309 ZA
Mains cable 115 V AC, NEMA 5-15 to C13, 3 m	P 4564 309 ZE
Mains cable 208 V AC, NEMA 6-15 to C13, 3 m	P 4564 309 ZF
Cables RS-485 Interface cables	
Interface cable, M12 m straight/M12 m straight, 3 m	PM 061 283 -T
Control Devices Backing pump	
Relay box for backing pumps, 1-phase 20 A for TC 110/120 and TCP 350, plug M8	PM 061 373 -T
Control Devices Power supplies and control displays	
HPU 001, Handheld programming unit	PM 051 510 -T
Accessories package for HPU 001/PC	PM 061 005 -T
TPS 110, power supply pack for wall/standard rail fitting	PM 061 340 -T
TPS 180, power supply pack for wall/standard rail fitting	PM 061 341 -T
TPS 111, power supply pack 3HU 19" rack module	PM 061 344 -T
TPS 181, power supply pack 19" rack module 3HU	PM 061 345 -T
DCU 002, Display Control Unit	PM 061 348 AT
Front panel kit for TPS 181	PM 061 394 -T
DCU 110, Display control unit with power supply pack	PM C01 820
DCU 180, Display control unit incl. power supply pack 19"	PM C01 821
Cooling Air cooling	
Air cooling for HiPace 60 P, HiPace 80 and SplitFlow 50/80 with TC 110/120	PM Z01 300
Cooling Water cooling	
Water cooling for HiPace 60 P HiPace 80 and for SplitFlow 50/80 with push-in fitting, 8 mm	PM 016 623 -T
Monitoring Pressure Sensors	
RPT 010, Digital Piezo/Pirani Sensor	PT R71 100
IKT 010, Digital cold cathode sensor, low current	PT R72 100
IKT 011, Digital cold cathode sensor, high current	PT R73 100

Accessories	
Mounting DN ISO-K, Mounting kits, bracket screws	
Mounting kit for HiPace 60/80, DN 63 ISO-K, including coated centering ring and bracket screws	PM 016 360 -T
Mounting kit for HiPace 60/80, DN 63 ISO-K, including coated centering ring, splinter shield and bracket screws	PM 016 361 -T
Mounting kit for HiPace 60/80, DN 63 ISO-K, including coated centering ring, protection screen and bracket screws	PM 016 362 -T
Mounting DN ISO-K, Mounting kits, claws	
Mounting kit for HiPace 60/80, DN 63 ISO-K, including coated centering ring and claws	PM 016 510 -T
Mounting kit for HiPace 60/80, DN 63 ISO-K, including coated centering ring, splinter and claw grips	PM 016 511 -T
Mounting kit for HiPace 60/80, DN 63 ISO-K, including coated centering ring with integrated protection screen and claw grips	PM 016 512 -T
Mounting DN ISO-K/-F, sealings	
Centering ring with multifunction coating, DN 63 ISO-K/-F	PM 016 206 -U
Mounting DN ISO-K/-F Mounting kits	
Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring, hexagon bolts	PM 016 930 -T
Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield, hexagon bolts	PM 016 931-T
Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with protection screen, hexagon bolts	PM 016 932 -T
Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring, stud screws	PM 016 935 -T
Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield, stud screws	PM 016 936 -T
Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with protection screen, stud screws	PM 016 937 -T
Other	
TIC 010, Adapter for two sensors	PT R70 000
Protection DN ISO-K/-F, sealings, splinter shields, protection screens	
Centering ring with multifunction coating and integrated splinter shield, DN 63 ISO-K/-F	PM 016 207 -U
Centering ring with multifunction coating and integrated protection screen, DN 63 ISO-K/-F	PM 016 208 -U
Protection Sealing gas throttles	
Sealing gas throttle for HiPace 30/60/80	PM Z01 316
Valves Fore-vacuum safety valves	
TVV 001, fore-vacuum safety valve, 230 V AC	PM Z01 205
TVV 001, fore-vacuum safety valve, 115 V AC	PM Z01 206
Valves Sealing gas valves, shielded (normally closed)	
Sealing gas valve, shielded for HiPace 30/60/80 with TC 110	PM Z01 310
Venting Venting accessories	
TTV 001, Drier for Venting Turbopumps	PM Z00 121

Accessories	
Venting Venting valves (normally closed)	
Venting valve, shielded, 24 V DC, G 1/8", for connection to TC 110/120	PM Z01 290
Vibration Reduction Vibration dampers	
Vibration damper for HiPace 60/80, DN 63 ISO-K	PM 006 800 -X

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

