



**OME 16 S, oil mist separator for
pumping speeds up to 12 m³/h**




Similar Image

OME 16 S, oil mist separator for pumping speeds up to 12 m³/h

- For exhaust flange
- Prevents emission of oil mist
- Customer benefit: Clean, oil free exhaust air

Dimensions

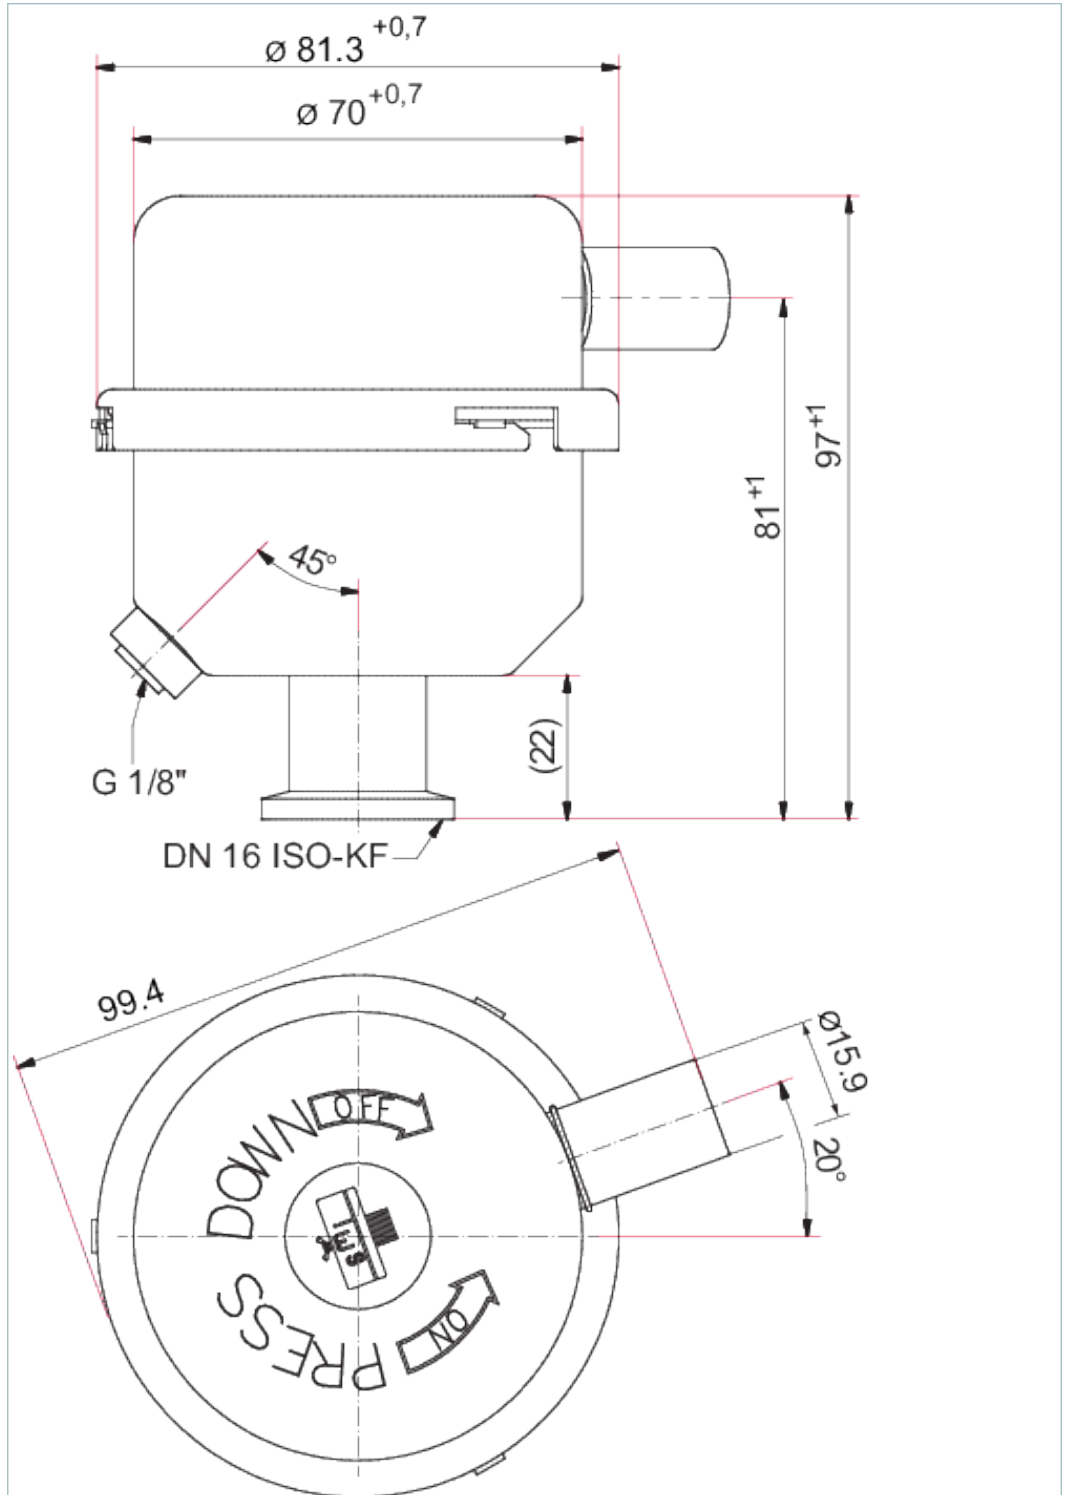

Technical Data		OME 16 S, oil mist separator for pumping speeds up to 12 m³/h
Body material		Steel
Capacity		0.02 l
Cartridge material		Fiberglass
Degree of separation		99.98 %
Exhaust pressure, max.		Atmospheric pressure
Flange (in)		DN 16 ISO-KF
Flange (out)		Hose connection, DN 16
For pumping speed up to		12 m³/h 7.06 cfm 200 l/min
Pressure max. (absolute)		1,500 hPa 1,125 Torr 1,500 mbar
Weight		0.35 kg 0.77 lb

Order number	
OME 16 S	PK Z40 000

Accessories	
Protection Oil return units from oil mist eliminators	
Oil return unit from OME 16 S to Duo 5 M/Duo 10 M	PK 005 987 -T
Oil return unit from OME 16 S/16 C to Duo 1.6/Duo 3/Duo 6/Duo 11/Uno 6	PK 005 986 -T

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.