

New!

# G-CONNECT

Maximum connectivity to control and analyse your Foam and Polyurea applications!

Hydraulic Proportioning Unit

Intuitive smart touch screen

Hydraulic power to assure constant pressures and ratio control

Control from your mobile device



2x 6000 W heating power

240 bar maximum pressure



# GAMA SPRAY EQUIPMENT


# G-CONNECT

## FEATURES AND CHARACTERISTICS


- ✓ Access all application data and generate your own reports from any device
- ✓ GPS location
- ✓ Smart touch screen easy to use
- ✓ Remote control with your mobile device
- ✓ Full control options:
  - Accurate ratio and output control with flowmeters
  - In & out temperatures and pressures control
  - Oil temperature
  - Alarms and troubleshooting guide

## SCREEN MENUS

### AUTOMATIC MODE

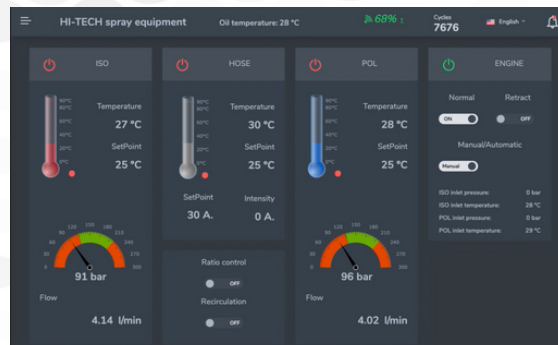

### DRUMS

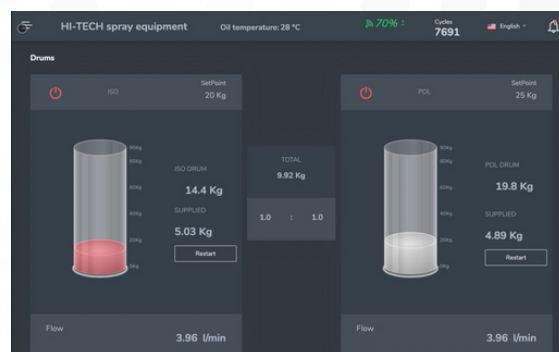

## TECHNICAL SPECIFICATIONS

### G-CONNECT

<b>MAX. OUTPUT (1.20 PUMPS):</b>	15 kg/min @ 110 bar 9 kg/min @ 160 bar 7 kg/min @ 240 bar
<b>ELECTRICAL CONNECTION:</b>	3 PE 400 V 50/60 Hz 3 PE 230 V 60 Hz
<b>HEATING POWER:</b>	12 KW
<b>HOSE HEATING:</b>	3 KW
<b>MOTOR POWER:</b>	4 KW
<b>MACHINE CONSUMPTION:</b>	38,4 A / 66,8 A
<b>MAX. HOSES LENGTH:</b>	93 m (for foam) 78 m (for polyurea)
<b>WEIGHT:</b>	242 kg (without oil)
<b>OIL CAPACITY:</b>	28 l
<b>DIMENSIONS:</b>	1295 mm x 745 mm x 650 mm

### G-CONNECT +

<b>MAX. OUTPUT (1.20 PUMPS):</b>	22 kg/min @ 110 bar 17 kg/min @ 160 bar 12 kg/min @ 240 bar
<b>ELECTRICAL CONNECTION:</b>	3 PE 400 V 50/60 Hz 3 PE 230 V 50 Hz
<b>HEATING POWER:</b>	16 KW
<b>HOSE HEATING:</b>	4 KW
<b>MOTOR POWER:</b>	5,5 KW
<b>MACHINE CONSUMPTION:</b>	51,1 A
<b>MAX. HOSES LENGTH:</b>	93 m
<b>WEIGHT:</b>	260 kg (without oil)
<b>OIL CAPACITY:</b>	28 l
<b>DIMENSIONS:</b>	1295 mm x 745 mm x 650 mm



Camí Pla, 31 Po. Ind. Mas Alba | 08870 Sitges, Barcelona (Spain)  
Tel.: + 34 938 11 40 00  
infogama@hitechspray.com | www.gamapur.com

