

The Best Never Rest Warranty - Lifetime

Leapers, Inc. warrants that all UTG & UTG PRO products conform to published specifications and are free from defects in material and workmanship. We will repair or replace defective products for the duration of the product's life span. Our dedicated and professional in-house customer service team will go above and beyond to make things right and provide the best in-class customer service experience you expect to receive.

Our warranty does not extend to products damaged from misuse, accidental damage, negligence, natural disasters/accidents, or unauthorized repair or alteration.

For warranty service, please submit your inquiry by visiting our customer service page on our website at www.leapers.com or give us a call at 734-542-1500. A Return Authorization Number (RMA) must be assigned before returning any products for warranty service.

Disclaimer and Limitation of Liability

Leapers is pleased to offer suggestions of the use of its products, however Leapers neither assumes responsibility for any omissions or errors nor assumes liability for any damages that result from the use of its products in accordance with information provided by Leapers, whether verbal or written.

EXCEPT FOR THE EXPRESS WRITTEN WARRANTY SPECIFICALLY SET FORTH ABOVE, ALL EXPRESS AND IMPLIED REPRESENTATIONS AND WARRANTIES ARE HEREBY DISCLAIMED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, NON-INTERFERENCE, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR WARRANTY OF ACCURACY OF ANY INFORMATION PROVIDED WHETHER WRITTEN OR ORAL. ALL WARRANTIES ARISING FROM ANY COURSE OF DEALING, LAW, USAGE OR TRADE PRACTICE ARE HEREBY EXPRESSLY EXCLUDED TO THE EXTENT ALLOWED BY LAW. TO THE EXTENT AN IMPLIED WARRANTY CANNOT BE EXCLUDED, SUCH WARRANTY IS LIMITED IN DURATION TO ONE YEAR. SOME STATES OR JURISDICTIONS DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

UNDER NO CIRCUMSTANCES IS LEAPERS, OR ITS SUPPLIERS OR RESELLERS LIABLE FOR ANY OF THE FOLLOWING EVEN IF INFORMED OF THEIR POSSIBILITY: 1) THIRD PARTY CLAIMS AGAINST YOU FOR DAMAGES; 2) SPECIAL, INCIDENTAL, OR INDIRECT DAMAGES OR FOR ANY ECONOMIC CONSEQUENTIAL DAMAGES; OR 3) LOST PROFITS, BUSINESS REVENUE, GOODWILL, OR ANTICIPATED SAVINGS. SOME STATES OR JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.



SHOOTER'S
BIPOD

OWNER'S MANUAL

For Model:


TL-BP78
TL-BP88
TL-BP79
TL-BP89

TL-BP28XS
TL-BP28XST
TL-BP28S
TL-BP28ST
TL-BP69S
TL-BP69ST

TL-BP18XS
TL-BP18XST
TL-BP18S
TL-BP18ST
TL-BP08S
TL-BP08ST




BIPOD SPECIFICATIONS

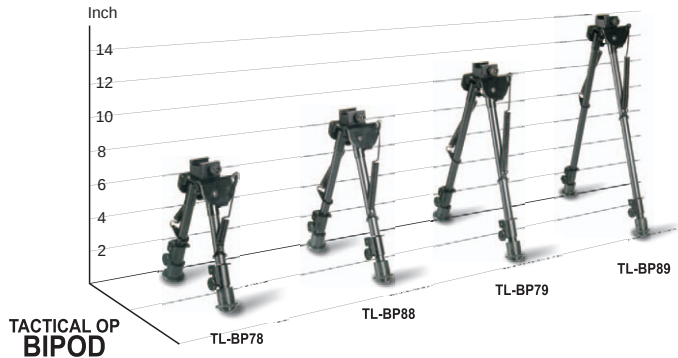

UNIVERSAL SHOOTER'S BIPOD



DRAGON'S CLAW BIPOD

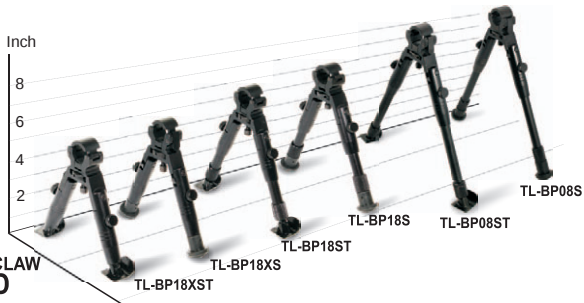

BIPOD FEATURE TABLE

	Item No.	Mounting Feature			Stand Type		Extendable Legs	Open Angle	Center Height		Leg Length	
		Picatinny	Swivel Stud	Barrel	Rubber	Steel			Min.	Max.	Min.	Max.
TACTICAL OP BIPOD	TL-BP78	✓	✓	—	✓	—	✓	50°	6.1"	7.9"	5.5"	7.4"
	TL-BP88	✓	✓	—	✓	—	✓	50°	8.3"	12.7"	9.7"	12.7"
	TL-BP79	✓	✓	—	✓	—	✓	50°	10.7"	14.3"	10.2"	14.1"
	TL-BP89	✓	✓	—	✓	—	✓	50°	13.7"	23.3"	13.5"	24"
UNIVERSAL SHOOTER'S BIPOD	TL-BP28XS	✓	✓	—	✓	—	—	50°	5.1"	5.1"	5.6"	5.6"
	TL-BP28XST	✓	✓	—	—	✓	—	50°	4.6"	4.6"	5.1"	5.1"
	TL-BP28S	✓	✓	—	✓	—	✓	50°	6.2"	6.7"	6.7"	7.5"
	TL-BP28ST	✓	✓	—	—	✓	✓	50°	5.8"	6.8"	6.3"	7.5"
	TL-BP69S	✓	✓	—	✓	—	✓	50°	8.7"	10.6"	9.5"	11.5"
	TL-BP69ST	✓	✓	—	—	✓	✓	50°	8.2"	10.3"	9"	11.3"
DRAGON'S CLAW BIPOD	TL-BP18XS	—	—	✓	✓	—	—	50°	5.1"	5.1"	5.6"	5.6"
	TL-BP18XST	—	—	✓	—	✓	—	50°	4.6"	4.6"	5.1"	5.1"
	TL-BP18S	—	—	✓	✓	—	✓	50°	6.2"	6.7"	6.7"	7.5"
	TL-BP18ST	—	—	✓	—	✓	✓	50°	5.8"	6.8"	6.3"	7.5"
	TL-BP08S	—	—	✓	✓	—	✓	50°	8.7"	10.6"	9.5"	11.5"
	TL-BP08ST	—	—	✓	—	✓	✓	50°	8.2"	10.3"	9"	11.3"



UTG TACTICAL OP BIPOD

PICATINNY & SWIVEL STUD MOUNT




SWIVEL STUD MOUNT



PICATINNY MOUNT

- High Tech Durable Aluminum Construction and Steel Top Platform
- Clever Dual Mounting - Picatinny Mount and Swivel Stud Mount
- Foldable Arms with Robust External Spring Tension Control
- Fully Adjustable Legs with Posi-lock Wheel & Quick Retraction Button

Feature Illustration

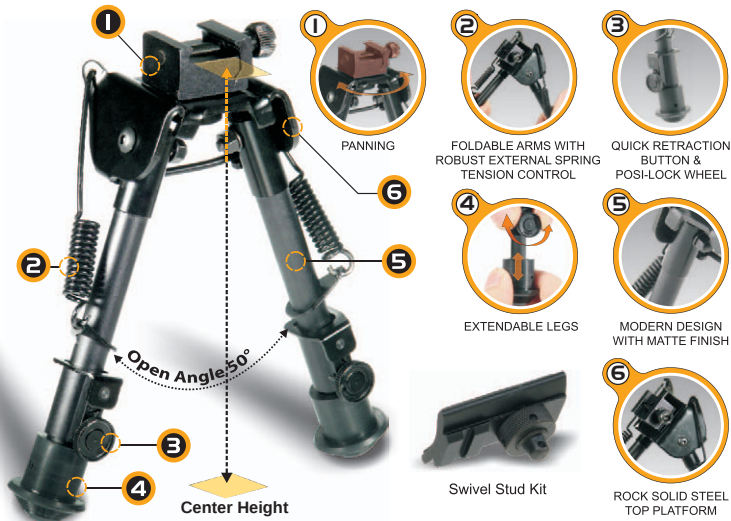



UTG UNIVERSAL SHOOTER'S BIPOD PICATINNY & SWIVEL STUD MOUNT

SWIVEL STUD MOUNT



PICATINNY MOUNT



- High Tech Durable Aluminum Construction
- Clever Dual Mounting Systems - Picatinny Mount and Swivel Stud Mount
- Unique Posi-Lock to Prevent Tipping
- Tactical Low Profile for Versatile Applications

Feature Illustration



PANNING



POSI-LOCK FEATURE TO
PREVENT TIPPING



EXTENDABLE LEGS




STURDY
FOLDABLE ARM



STEEL COMBAT STAND OR
RUBBERIZED COMFORT STAND



SWIVEL STUD MOUNT INSTALLATION INSTRUCTION



PICATINNY MOUNT INSTALLATION INSTRUCTION



Loosen the Thumb Nut and fit the cross bar in the mounting base into a Picatinny rail slot. Tighten the Thumb Nut securely.

UTG DRAGON'S CLAW BIPOD CLAMP-ON BARREL

- High Tech Durable Aluminum Construction
- Clever Adjustment Wheel for Wide Range of Barrel Sizes- 11mm to 19mm
- User Friendly Spring Operated Clamp-On Feature
- Unique Posi-Lock to Prevent Tipping
- Tactical Low Profile for Versatile Applications

Feature Illustration



POSI-LOCK FEATURE TO
PREVENT TIPPING



EXTENDABLE LEGS



STURDY
FOLDABLE ARM



STEEL COMBAT STAND OR
RUBBERIZED COMFORT STAND

CLAMP-ON INSTALLATION INSTRUCTION



Spring Controlled Barrel Ring



Fits Barrel Size From 11mm to 19mm

- Reset the Clamping Deck to the lowest position.
- Push the Spring Locking Switch and fully open up the top half of the ring.
- Fit the barrel into the opening and relock the top half of the ring. You should hear the snap sound of the Spring Locking Switch when its fully locked.
- Turn the Adjustment Wheel to raise the Clamping Deck until the barrel is tightened securely.
- Fully check and make sure the bipod is completely locked onto the barrel before using.

POSI-LOCK OPERATING INSTRUCTION



- Press the Posi-lock Knob downward along the arm toward the direction of the bipod stand.
- Swing the bipod arm to either fold or un-fold while holding down the Posi-lock Knob.
- Release the Posi-lock Knob to lock the arm in place.