


Service Manual

Air Conditioner

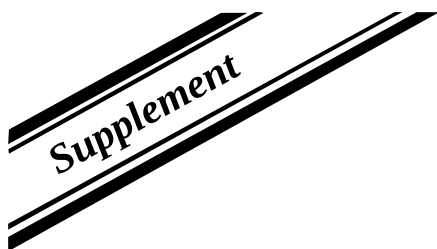

Outdoor Unit
CU-2Z50ABEC
CU-3Z75ABEC

Subject: Specifications update

Please file and use this supplement manual together with the service manual for Model No. CU-2Z50ABEC CU-3Z75ABEC Order No. PAPAMY2408057CE.

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the products dealt with in this service information by anyone else could result in serious injury or death.

TABLE OF CONTENTS

1.	Specifications.....	2
1.1	Multi Split Combination Possibility	2

1. Specifications

1.1 Multi Split Combination Possibility

Type of Indoor: CS-HZ25/35ZKE wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign	SEER		ANNUAL CONSUMPTION (kWh)	
	(kW)	W/W													CLASS				
CU-2250ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
	2 Room	2.5 + 2.5	5.0	2.65	2.65		5.30	2.1 ~ 7.5	1200	360 ~ 2000	4.42	A	600	5.4	5.3	8.00	A++	232	1.6 + 1.6
		2.5 + 3.5	6.0	2.21	3.09		5.30	2.1 ~ 7.5	1170	360 ~ 1970	4.53	A	585	5.3	5.3	8.00	A++	232	1.4 + 1.7
		3.5 + 3.5	7.0	2.65	2.65		5.30	2.1 ~ 7.5	1160	360 ~ 1960	4.57	A	580	5.2	5.3	8.00	A++	232	1.6 + 1.6

Type of Indoor: CS-HZ25/35ZKE-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min – max	Rating	min – max	W/W	CLASS			Pdesign	SEER		ANNUAL CONSUMPTION (kwh)	
	(kW)	W/W													CLASS				
CU-2250ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
	2 Room	2.5 + 2.5	5.0	2.65	2.65		5.30	2.1 ~ 7.5	1200	360 ~ 2000	4.42	A	600	5.4	5.3	8.00	A++	232	1.6 + 1.6
		2.5 + 3.5	6.0	2.21	3.09		5.30	2.1 ~ 7.5	1170	360 ~ 1970	4.53	A	585	5.3	5.3	8.00	A++	232	1.4 + 1.7
		3.5 + 3.5	7.0	2.65	2.65		5.30	2.1 ~ 7.5	1160	360 ~ 1960	4.57	A	580	5.2	5.3	8.00	A++	232	1.6 + 1.6

Type of Indoor: CS-HZ25/35ZKE-5 wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
															Pdesign		SEER		
	Cooling			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			(kW)	W/W	CLASS		
CU-2250ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
	2 Room	2.5 + 2.5	5.0	2.65	2.65		5.30	2.1 ~ 7.5	1200	360 ~ 2000	4.42	A	600	5.4	5.3	8.00	A++	232	1.6 + 1.6
		2.5 + 3.5	6.0	2.21	3.09		5.30	2.1 ~ 7.5	1170	360 ~ 1970	4.53	A	585	5.3	5.3	8.00	A++	232	1.4 + 1.7
		3.5 + 3.5	7.0	2.65	2.65		5.30	2.1 ~ 7.5	1160	360 ~ 1960	4.57	A	580	5.2	5.3	8.00	A++	232	1.6 + 1.6

Type of Indoor: CS-HZ25/35ZKE-5-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min – max	Rating	min – max	W/W	CLASS			Pdesign	SEER		ANNUAL CONSUMPTION (kwh)	
	(kW)	W/W													CLASS				
CU-2250ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
	2 Room	2.5 + 2.5	5.0	2.65	2.65		5.30	2.1 ~ 7.5	1200	360 ~ 2000	4.42	A	600	5.4	5.3	8.00	A++	232	1.6 + 1.6
		2.5 + 3.5	6.0	2.21	3.09		5.30	2.1 ~ 7.5	1170	360 ~ 1970	4.53	A	585	5.3	5.3	8.00	A++	232	1.4 + 1.7
		3.5 + 3.5	7.0	2.65	2.65		5.30	2.1 ~ 7.5	1160	360 ~ 1960	4.57	A	580	5.2	5.3	8.00	A++	232	1.6 + 1.6

Type of Indoor: CS-Z20/25/35/50ZKE wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)				Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
														Pdesign	SEER		ANNUAL CONSUMPTION (kWh)		
	Cooling	Room A		Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			(kW)	W/W	CLASS			
CU-Z250ABEC	1 Room	2.0	2.0	2.00			2.00	1.8 ~ 2.5	400	340 ~ 520	5.00	A	200	2.0	-	-	-	-	1.3
		2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
		5.0	5.0	5.00			5.00	1.9 ~ 5.7	1420	340 ~ 1820	3.52	A	710	6.6	-	-	-	-	2.7
	2 Room	2.0 + 2.0	4.0	2.00	2.00		4.00	2.1 ~ 6.9	940	360 ~ 1910	4.26	A	470	4.2	4.0	8.00	A++	175	1.3 + 1.3
		2.0 + 2.5	4.5	2.00	2.50		4.50	2.1 ~ 7.0	1100	360 ~ 1920	4.09	A	550	5.0	4.5	8.00	A++	197	1.3 + 1.5
		2.0 + 3.5	5.5	1.93	3.37		5.30	2.1 ~ 7.5	1240	360 ~ 2040	4.27	A	620	5.6	5.3	8.00	A++	232	1.2 + 1.9
		2.0 + 5.0	7.0	1.51	3.79		5.30	2.1 ~ 7.8	1210	360 ~ 2240	4.38	A	605	5.4	5.3	8.00	A++	232	1.0 + 2.2
		2.5 + 2.5	5.0	2.65	2.65		5.30	2.1 ~ 7.5	1260	360 ~ 2060	4.21	A	630	5.7	5.3	8.00	A++	232	1.6 + 1.6
		2.5 + 3.5	6.0	2.21	3.09		5.30	2.1 ~ 7.5	1230	360 ~ 2030	4.31	A	615	5.5	5.3	8.00	A++	232	1.4 + 1.7
		2.5 + 5.0	7.5	1.77	3.53		5.30	2.1 ~ 7.8	1200	360 ~ 2200	4.42	A	600	5.4	5.3	8.00	A++	232	1.1 + 2.0
		3.5 + 3.5	7.0	2.65	2.65		5.30	2.1 ~ 7.5	1220	360 ~ 2020	4.34	A	610	5.5	5.3	8.00	A++	232	1.6 + 1.6
		3.5 + 5.0	8.5	2.18	3.12		5.30	2.1 ~ 7.8	1190	360 ~ 2180	4.45	A	595	5.4	5.3	8.00	A++	232	1.4 + 1.8

Type of Indoor: CS-NZ25/35/50YKE-1 wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)				Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W			CLASS	Pdesign	SEER			ANNUAL CONSUMPTION (kWh)
	(kW)	W/W													CLASS				
CU-Z250ABEC	1 Room	2.0	2.0	2.00			2.00	1.8 ~ 2.5	400	340 ~ 520	5.00	A	200	2.0	-	-	-	-	1.3
		2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
		5.0	5.0	5.00			5.00	1.9 ~ 5.7	1420	340 ~ 1820	3.52	A	710	6.6	-	-	-	-	2.7
	2 Room	2.0 + 2.0	4.0	2.00	2.00		4.00	2.1 ~ 6.9	940	360 ~ 1910	4.26	A	470	4.2	4.0	8.00	A++	175	1.3 + 1.3
		2.0 + 2.5	4.5	2.00	2.50		4.50	2.1 ~ 7.0	1100	360 ~ 1920	4.09	A	550	5.0	4.5	8.00	A++	197	1.3 + 1.5
		2.0 + 3.5	5.5	1.93	3.37		5.30	2.1 ~ 7.5	1240	360 ~ 2040	4.27	A	620	5.6	5.3	8.00	A++	232	1.2 + 1.9
		2.0 + 5.0	7.0	1.51	3.79		5.30	2.1 ~ 7.8	1210	360 ~ 2240	4.38	A	605	5.4	5.3	8.00	A++	232	1.0 + 2.2
		2.5 + 2.5	5.0	2.65	2.65		5.30	2.1 ~ 7.5	1260	360 ~ 2060	4.21	A	630	5.7	5.3	8.00	A++	232	1.6 + 1.6
		2.5 + 3.5	6.0	2.21	3.09		5.30	2.1 ~ 7.5	1230	360 ~ 2030	4.31	A	615	5.5	5.3	8.00	A++	232	1.4 + 1.7
		2.5 + 5.0	7.5	1.77	3.53		5.30	2.1 ~ 7.8	1200	360 ~ 2200	4.42	A	600	5.4	5.3	8.00	A++	232	1.1 + 2.0
		3.5 + 3.5	7.0	2.65	2.65		5.30	2.1 ~ 7.5	1220	360 ~ 2020	4.34	A	610	5.5	5.3	8.00	A++	232	1.6 + 1.6
		3.5 + 5.0	8.5	2.18	3.12		5.30	2.1 ~ 7.8	1190	360 ~ 2180	4.45	A	595	5.4	5.3	8.00	A++	232	1.4 + 1.8

Type of Indoor: CS-HZ25/35ZKE wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-2250ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.20	3.20		6.40	1.7 ~ 8.7	1360	320 ~ 2400	4.71	A	680	6.0	5.2	4.60	A++	1583	
		2.5 + 3.5	6.0	2.67	3.73		6.40	1.7 ~ 8.7	1340	320 ~ 2370	4.78	A	670	5.9	5.2	4.60	A++	1583	
		3.5 + 3.5	7.0	3.20	3.20		6.40	1.7 ~ 8.7	1330	320 ~ 2360	4.81	A	665	5.9	5.2	4.60	A++	1583	

Type of Indoor: CS-HZ25/35ZKE-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-2250ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.20	3.20		6.40	1.7 ~ 8.7	1360	320 ~ 2400	4.71	A	680	6.0	5.2	4.60	A++	1583	
		2.5 + 3.5	6.0	2.67	3.73		6.40	1.7 ~ 8.7	1340	320 ~ 2370	4.78	A	670	5.9	5.2	4.60	A++	1583	
		3.5 + 3.5	7.0	3.20	3.20		6.40	1.7 ~ 8.7	1330	320 ~ 2360	4.81	A	665	5.9	5.2	4.60	A++	1583	

Type of Indoor : CS-HZ25/35ZKE-5 wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)				Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
														Pdesign		SCOP			ANNUAL CONSUMPTION (kWh)
	Heating			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W			CLASS	(kW)	W/W	CLASS		
CU-2250ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.20	3.20		6.40	1.7 ~ 8.7	1360	320 ~ 2400	4.71	A	680	6.0	5.2	4.60	A++	1583	
		2.5 + 3.5	6.0	2.67	3.73		6.40	1.7 ~ 8.7	1340	320 ~ 2370	4.78	A	670	5.9	5.2	4.60	A++	1583	
		3.5 + 3.5	7.0	3.20	3.20		6.40	1.7 ~ 8.7	1330	320 ~ 2360	4.81	A	665	5.9	5.2	4.60	A++	1583	

Type of Indoor: CS-HZ25/35ZKE-5-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)				Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
														Pdesign		SCOP			ANNUAL CONSUMPTION (kWh)
	Heating			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W			CLASS	(kW)	W/W	CLASS		
CU-2250ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.20	3.20		6.40	1.7 ~ 8.7	1360	320 ~ 2400	4.71	A	680	6.0	5.2	4.60	A++	1583	
		2.5 + 3.5	6.0	2.67	3.73		6.40	1.7 ~ 8.7	1340	320 ~ 2370	4.78	A	670	5.9	5.2	4.60	A++	1583	
		3.5 + 3.5	7.0	3.20	3.20		6.40	1.7 ~ 8.7	1330	320 ~ 2360	4.81	A	665	5.9	5.2	4.60	A++	1583	

Type of Indoor: CS-Z20/25/35/50ZKE wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-Z250ABEC	1 Room	2.0	2.0	3.20			3.20	1.2 ~ 4.1	810	300 ~ 1160	3.95	A	405	4.0	-	-	-	-	
		2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
		5.0	5.0	6.80			6.80	1.2 ~ 7.7	2100	300 ~ 2520	3.24	C	1050	9.7	-	-	-	-	
	2 Room	2.0 + 2.0	4.0	3.15	3.15		6.30	1.7 ~ 8.3	1550	320 ~ 2450	4.06	A	775	6.8	5.1	4.40	A+	1623	
		2.0 + 2.5	4.5	2.84	3.56		6.40	1.7 ~ 8.6	1540	320 ~ 2500	4.16	A	770	6.8	5.1	4.40	A+	1623	
		2.0 + 3.5	5.5	2.33	4.07		6.40	1.7 ~ 8.7	1530	320 ~ 2440	4.18	A	765	6.8	5.1	4.40	A+	1623	
		2.0 + 5.0	7.0	1.83	4.57		6.40	1.7 ~ 8.8	1440	320 ~ 2480	4.44	A	720	6.4	5.1	4.40	A+	1623	
		2.5 + 2.5	5.0	3.20	3.20		6.40	1.7 ~ 8.7	1530	320 ~ 2440	4.18	A	765	6.8	5.1	4.40	A+	1623	
		2.5 + 3.5	6.0	2.67	3.73		6.40	1.7 ~ 8.7	1520	320 ~ 2430	4.21	A	760	6.7	5.1	4.40	A+	1623	
		2.5 + 5.0	7.5	2.13	4.27		6.40	1.7 ~ 8.8	1430	320 ~ 2470	4.48	A	715	6.3	5.1	4.40	A+	1623	
		3.5 + 3.5	7.0	3.20	3.20		6.40	1.7 ~ 8.7	1510	320 ~ 2420	4.24	A	755	6.7	5.1	4.40	A+	1623	
		3.5 + 5.0	8.5	2.64	3.76		6.40	1.7 ~ 8.8	1420	320 ~ 2460	4.51	A	710	6.3	5.1	4.40	A+	1623	

Type of Indoor: CS-NZ25/35/50YKE-1 wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)				Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
														Pdesign		SCOP			ANNUAL CONSUMPTION (kWh)
	Heating			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W			CLASS	(kW)	W/W	CLASS		
CU-Z250ABEC	1 Room	2.0	2.0	3.20			3.20	1.2 ~ 4.1	810	300 ~ 1160	3.95	A	405	4.0	-	-	-	-	
		2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
		5.0	5.0	6.80			6.80	1.2 ~ 7.7	2100	300 ~ 2520	3.24	C	1050	9.7	-	-	-	-	
	2 Room	2.0 + 2.0	4.0	3.15	3.15		6.30	1.7 ~ 8.3	1550	320 ~ 2450	4.06	A	775	6.8	5.1	4.40	A+	1623	
		2.0 + 2.5	4.5	2.84	3.56		6.40	1.7 ~ 8.6	1540	320 ~ 2500	4.16	A	770	6.8	5.1	4.40	A+	1623	
		2.0 + 3.5	5.5	2.33	4.07		6.40	1.7 ~ 8.7	1530	320 ~ 2440	4.18	A	765	6.8	5.1	4.40	A+	1623	
		2.0 + 5.0	7.0	1.83	4.57		6.40	1.7 ~ 8.8	1440	320 ~ 2480	4.44	A	720	6.4	5.1	4.40	A+	1623	
		2.5 + 2.5	5.0	3.20	3.20		6.40	1.7 ~ 8.7	1530	320 ~ 2440	4.18	A	765	6.8	5.1	4.40	A+	1623	
		2.5 + 3.5	6.0	2.67	3.73		6.40	1.7 ~ 8.7	1520	320 ~ 2430	4.21	A	760	6.7	5.1	4.40	A+	1623	
		2.5 + 5.0	7.5	2.13	4.27		6.40	1.7 ~ 8.8	1430	320 ~ 2470	4.48	A	715	6.3	5.1	4.40	A+	1623	
		3.5 + 3.5	7.0	3.20	3.20		6.40	1.7 ~ 8.7	1510	320 ~ 2420	4.24	A	755	6.7	5.1	4.40	A+	1623	
3.5 + 5.0	8.5	2.64	3.76		6.40	1.7 ~ 8.8	1420	320 ~ 2460	4.51	A	710	6.3	5.1	4.40	A+	1623			

Type of Indoor: CS-HZ25/35ZKE-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
	Cooling			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SEER			ANNUAL CONSUMPTION (kWh)
															(kW)	W/W	CLASS			
CU-3Z75ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5	
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0	
	2 Room	2.5 + 2.5	5.0	2.50	2.50		5.00	2.1 ~ 7.5	1110	380 ~ 2450	4.50	A	555	4.8	5.00	7.20	A++	243	1.5 + 1.5	
		2.5 + 3.5	6.0	2.50	3.50		6.00	2.1 ~ 7.6	1480	380 ~ 2460	4.05	A	740	6.5	6.00	7.20	A++	292	1.5 + 2.0	
		3.5 + 3.5	7.0	3.50	3.50		7.00	2.1 ~ 7.7	1840	380 ~ 2410	3.80	A	920	8.0	7.00	7.20	A++	340	2.0 + 2.0	
	3 Room	2.5 + 2.5 + 2.5	7.5	2.50	2.50	2.50	7.50	2.1 ~ 8.8	1900	380 ~ 2420	3.95	A	950	8.3	7.50	8.00	A++	328	1.5 + 1.5 + 1.5	
		2.5 + 2.5 + 3.5	8.5	2.21	2.21	3.09	7.50	2.1 ~ 8.8	1880	380 ~ 2330	3.99	A	940	8.2	7.50	8.00	A++	328	1.4 + 1.4 + 1.7	
		2.5 + 3.5 + 3.5	9.5	1.99	2.76	2.76	7.50	2.1 ~ 8.9	1860	410 ~ 2340	4.03	A	930	8.1	7.50	8.00	A++	328	1.3 + 1.6 + 1.6	
		3.5 + 3.5 + 3.5	10.5	2.50	2.50	2.50	7.50	2.1 ~ 9.0	1830	410 ~ 2340	4.10	A	915	8.0	7.50	8.00	A++	328	1.5 + 1.5 + 1.5	

Type of Indoor: CS-HZ25/35ZKE-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SEER		
	(kW)	W/W													CLASS				
CU-3Z75ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
	2 Room	2.5 + 2.5	5.0	2.50	2.50		5.00	2.1 ~ 7.5	1110	380 ~ 2450	4.50	A	555	4.8	5.00	7.20	A++	243	1.5 + 1.5
		2.5 + 3.5	6.0	2.50	3.50		6.00	2.1 ~ 7.6	1480	380 ~ 2460	4.05	A	740	6.5	6.00	7.20	A++	292	1.5 + 2.0
		3.5 + 3.5	7.0	3.50	3.50		7.00	2.1 ~ 7.7	1840	380 ~ 2410	3.80	A	920	8.0	7.00	7.20	A++	340	2.0 + 2.0
	3 Room	2.5 + 2.5 + 2.5	7.5	2.50	2.50	2.50	7.50	2.1 ~ 8.8	1900	380 ~ 2420	3.95	A	950	8.3	7.50	8.00	A++	328	1.5 + 1.5 + 1.5
		2.5 + 2.5 + 3.5	8.5	2.21	2.21	3.09	7.50	2.1 ~ 8.8	1880	380 ~ 2330	3.99	A	940	8.2	7.50	8.00	A++	328	1.4 + 1.4 + 1.7
		2.5 + 3.5 + 3.5	9.5	1.99	2.76	2.76	7.50	2.1 ~ 8.9	1860	410 ~ 2340	4.03	A	930	8.1	7.50	8.00	A++	328	1.3 + 1.6 + 1.6
		3.5 + 3.5 + 3.5	10.5	2.50	2.50	2.50	7.50	2.1 ~ 9.0	1830	410 ~ 2340	4.10	A	915	8.0	7.50	8.00	A++	328	1.5 + 1.5 + 1.5

Type of Indoor: CS-HZ25/35ZKE-5 wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
	Cooling			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SEER			ANNUAL CONSUMPTION (kWh)
															(kW)	W/W	CLASS			
CU-3Z75ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5	
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0	
	2 Room	2.5 + 2.5	5.0	2.50	2.50		5.00	2.1 ~ 7.5	1110	380 ~ 2450	4.50	A	555	4.8	5.00	7.20	A++	243	1.5 + 1.5	
		2.5 + 3.5	6.0	2.50	3.50		6.00	2.1 ~ 7.6	1480	380 ~ 2460	4.05	A	740	6.5	6.00	7.20	A++	292	1.5 + 2.0	
		3.5 + 3.5	7.0	3.50	3.50		7.00	2.1 ~ 7.7	1840	380 ~ 2410	3.80	A	920	8.0	7.00	7.20	A++	340	2.0 + 2.0	
	3 Room	2.5 + 2.5 + 2.5	7.5	2.50	2.50	2.50	7.50	2.1 ~ 8.8	1900	380 ~ 2420	3.95	A	950	8.3	7.50	8.00	A++	328	1.5 + 1.5 + 1.5	
		2.5 + 2.5 + 3.5	8.5	2.21	2.21	3.09	7.50	2.1 ~ 8.8	1880	380 ~ 2330	3.99	A	940	8.2	7.50	8.00	A++	328	1.4 + 1.4 + 1.7	
		2.5 + 3.5 + 3.5	9.5	1.99	2.76	2.76	7.50	2.1 ~ 8.9	1860	410 ~ 2340	4.03	A	930	8.1	7.50	8.00	A++	328	1.3 + 1.6 + 1.6	
		3.5 + 3.5 + 3.5	10.5	2.50	2.50	2.50	7.50	2.1 ~ 9.0	1830	410 ~ 2340	4.10	A	915	8.0	7.50	8.00	A++	328	1.5 + 1.5 + 1.5	

Type of Indoor: CS-HZ25/35ZKE-5-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)				Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W			CLASS	Pdesign (kW)	SEER (W/W)			ANNUAL CONSUMPTION (kWh)
	Cooling																		
CU-3Z75ABEC	1 Room	2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
	2 Room	2.5 + 2.5	5.0	2.50	2.50		5.00	2.1 ~ 7.5	1110	380 ~ 2450	4.50	A	555	4.8	5.00	7.20	A++	243	1.5 + 1.5
		2.5 + 3.5	6.0	2.50	3.50		6.00	2.1 ~ 7.6	1480	380 ~ 2460	4.05	A	740	6.5	6.00	7.20	A++	292	1.5 + 2.0
		3.5 + 3.5	7.0	3.50	3.50		7.00	2.1 ~ 7.7	1840	380 ~ 2410	3.80	A	920	8.0	7.00	7.20	A++	340	2.0 + 2.0
	3 Room	2.5 + 2.5 + 2.5	7.5	2.50	2.50	2.50	7.50	2.1 ~ 8.8	1900	380 ~ 2420	3.95	A	950	8.3	7.50	8.00	A++	328	1.5 + 1.5 + 1.5
		2.5 + 2.5 + 3.5	8.5	2.21	2.21	3.09	7.50	2.1 ~ 8.8	1880	380 ~ 2330	3.99	A	940	8.2	7.50	8.00	A++	328	1.4 + 1.4 + 1.7
		2.5 + 3.5 + 3.5	9.5	1.99	2.76	2.76	7.50	2.1 ~ 8.9	1860	410 ~ 2340	4.03	A	930	8.1	7.50	8.00	A++	328	1.3 + 1.6 + 1.6
		3.5 + 3.5 + 3.5	10.5	2.50	2.50	2.50	7.50	2.1 ~ 9.0	1830	410 ~ 2340	4.10	A	915	8.0	7.50	8.00	A++	328	1.5 + 1.5 + 1.5

Type of Indoor: CS-Z20/25/35/50ZKEW wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)				Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h	
														Pdesign		SEER			ANNUAL CONSUMPTION (kWh)
	Cooling			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W			CLASS	(kW)	W/W	CLASS		
CU-3Z75ABEC	1 Room	2.0	2.0	2.00			2.00	1.8 ~ 2.5	400	340 ~ 520	5.00	A	200	2.0	-	-	-	-	1.3
		2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
		5.0	5.0	5.00			5.00	1.9 ~ 5.7	1420	340 ~ 1820	3.52	A	710	6.6	-	-	-	-	2.7
	2 Room	2.0 + 2.0	4.0	2.00	2.00		4.00	2.1 ~ 7.0	930	380 ~ 2110	4.30	A	465	4.1	-	-	-	-	1.3 + 1.3
		2.0 + 2.5	4.5	2.00	2.50		4.50	2.1 ~ 7.0	960	380 ~ 2070	4.69	A	480	4.2	4.50	7.20	A++	219	1.3 + 1.5
		2.0 + 3.5	5.5	2.00	3.50		5.50	2.1 ~ 7.6	1360	380 ~ 2300	4.04	A	680	5.9	5.50	7.20	A++	267	1.3 + 2.0
		2.0 + 5.0	7.0	2.00	5.00		7.00	2.2 ~ 8.3	1880	400 ~ 2340	3.72	A	940	8.2	7.00	7.20	A++	340	1.3 + 2.7
		2.5 + 2.5	5.0	2.50	2.50		5.00	2.1 ~ 7.5	1170	380 ~ 2290	4.27	A	585	5.1	5.00	7.20	A++	243	1.5 + 1.5
		2.5 + 3.5	6.0	2.50	3.50		6.00	2.1 ~ 7.6	1560	380 ~ 2300	3.85	A	780	6.8	6.00	7.20	A++	292	1.5 + 2.0
		2.5 + 5.0	7.5	2.50	5.00		7.50	2.1 ~ 8.3	2090	370 ~ 2340	3.59	A	1045	9.1	7.50	7.20	A++	365	1.5 + 2.7
		3.5 + 3.5	7.0	3.50	3.50		7.00	2.1 ~ 7.7	1910	380 ~ 2260	3.66	A	955	8.3	7.00	7.20	A++	340	2.0 + 2.0
		3.5 + 5.0	8.5	3.09	4.41		7.50	2.2 ~ 8.4	2010	400 ~ 2340	3.73	A	1005	8.8	7.50	7.20	A++	365	1.7 + 2.4
		5.0 + 5.0	10.0	3.75	3.75		7.50	2.3 ~ 8.9	1930	460 ~ 2350	3.89	A	965	8.4	7.50	7.20	A++	365	2.2 + 2.2
	3 Room	2.0 + 2.0 + 2.0	6.0	2.00	2.00	2.00	6.00	2.1 ~ 8.8	1340	380 ~ 2270	4.48	A	670	5.9	6.00	8.00	A++	263	1.3 + 1.3 + 1.3
		2.0 + 2.0 + 2.5	6.5	2.00	2.00	2.50	6.50	2.1 ~ 8.8	1650	380 ~ 2270	3.94	A	825	7.2	6.50	8.00	A++	284	1.3 + 1.3 + 1.5
		2.0 + 2.0 + 3.5	7.5	2.00	2.00	3.50	7.50	2.1 ~ 8.8	1940	380 ~ 2190	3.87	A	970	8.5	7.50	8.00	A++	328	1.3 + 1.3 + 2.0
		2.0 + 2.0 + 5.0	9.0	1.67	1.67	4.17	7.50	2.2 ~ 9.4	1750	480 ~ 2290	4.29	A	875	7.6	7.50	8.00	A++	328	1.1 + 1.1 + 2.4
		2.0 + 2.5 + 2.5	7.0	2.00	2.50	2.50	7.00	2.1 ~ 8.8	1850	380 ~ 2270	3.78	A	925	8.1	7.00	8.00	A++	306	1.3 + 1.5 + 1.5
		2.0 + 2.5 + 3.5	8.0	1.88	2.34	3.28	7.50	2.1 ~ 8.8	1940	380 ~ 2190	3.87	A	970	8.5	7.50	8.00	A++	328	1.2 + 1.5 + 1.9
		2.0 + 2.5 + 5.0	9.5	1.58	1.97	3.95	7.50	2.2 ~ 9.4	1750	480 ~ 2290	4.29	A	875	7.6	7.50	8.00	A++	328	1.0 + 1.3 + 2.3
		2.0 + 3.5 + 3.5	9.0	1.67	2.92	2.92	7.50	2.1 ~ 8.9	1900	410 ~ 2200	3.95	A	950	8.3	7.50	8.00	A++	328	1.1 + 1.7 + 1.7
		2.0 + 3.5 + 5.0	10.5	1.43	2.50	3.57	7.50	2.2 ~ 9.4	1750	480 ~ 2240	4.29	A	875	7.6	7.50	8.00	A++	328	0.9 + 1.5 + 2.1
		2.5 + 2.5 + 2.5	7.5	2.50	2.50	2.50	7.50	2.1 ~ 8.8	1940	380 ~ 2270	3.87	A	970	8.5	7.50	8.00	A++	328	1.5 + 1.5 + 1.5
		2.5 + 2.5 + 3.5	8.5	2.21	2.21	3.09	7.50	2.1 ~ 8.8	1940	380 ~ 2190	3.87	A	970	8.5	7.50	8.00	A++	328	1.4 + 1.4 + 1.7
		2.5 + 2.5 + 5.0	10.0	1.88	1.88	3.75	7.50	2.2 ~ 9.4	1750	480 ~ 2290	4.29	A	875	7.6	7.50	8.00	A++	328	1.2 + 1.2 + 2.2
		2.5 + 3.5 + 3.5	9.5	1.99	2.76	2.76	7.50	2.1 ~ 8.9	1900	410 ~ 2200	3.95	A	950	8.3	7.50	8.00	A++	328	1.3 + 1.6 + 1.6
		2.5 + 3.5 + 5.0	11.0	1.71	2.39	3.41	7.50	2.2 ~ 9.4	1750	480 ~ 2240	4.29	A	875	7.6	7.50	8.00	A++	328	1.1 + 1.5 + 2.0
		3.5 + 3.5 + 3.5	10.5	2.50	2.50	2.50	7.50	2.1 ~ 9.0	1850	410 ~ 2200	4.05	A	925	8.1	7.50	8.00	A++	328	1.5 + 1.5 + 1.5

Type of Indoor: CS-NZ25/35/50YKE-1 wall mount series

Outdoor unit	Indoor unit capacity		Total	Cooling Capacity (kW)					Input Power (W)		EER		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
	Cooling			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign (kW)	SEER		ANNUAL CONSUMPTION (kWh)	
																W/W	CLASS		
CU-3275ABEC	1 Room	2.0	2.0	2.00			2.00	1.8 ~ 2.5	400	340 ~ 520	5.00	A	200	2.0	-	-	-	-	1.3
		2.5	2.5	2.50			2.50	1.8 ~ 2.9	470	340 ~ 620	5.32	A	235	2.3	-	-	-	-	1.5
		3.5	3.5	3.50			3.50	1.8 ~ 3.8	880	340 ~ 990	3.98	A	440	4.3	-	-	-	-	2.0
		5.0	5.0	5.00			5.00	1.9 ~ 5.7	1420	340 ~ 1820	3.52	A	710	6.6	-	-	-	-	2.7
	2 Room	2.0 + 2.0	4.0	2.00	2.00		4.00	2.1 ~ 7.0	930	380 ~ 2110	4.30	A	465	4.1	-	-	-	-	1.3 + 1.3
		2.0 + 2.5	4.5	2.00	2.50		4.50	2.1 ~ 7.0	960	380 ~ 2070	4.69	A	480	4.2	4.50	7.20	A++	219	1.3 + 1.5
		2.0 + 3.5	5.5	2.00	3.50		5.50	2.1 ~ 7.6	1360	380 ~ 2300	4.04	A	680	5.9	5.50	7.20	A++	267	1.3 + 2.0
		2.0 + 5.0	7.0	2.00	5.00		7.00	2.2 ~ 8.3	1880	400 ~ 2340	3.72	A	940	8.2	7.00	7.20	A++	340	1.3 + 2.7
		2.5 + 2.5	5.0	2.50	2.50		5.00	2.1 ~ 7.5	1170	380 ~ 2290	4.27	A	585	5.1	5.00	7.20	A++	243	1.5 + 1.5
		2.5 + 3.5	6.0	2.50	3.50		6.00	2.1 ~ 7.6	1560	380 ~ 2300	3.85	A	780	6.8	6.00	7.20	A++	292	1.5 + 2.0
		2.5 + 5.0	7.5	2.50	5.00		7.50	2.1 ~ 8.3	2090	370 ~ 2340	3.59	A	1045	9.1	7.50	7.20	A++	365	1.5 + 2.7
		3.5 + 3.5	7.0	3.50	3.50		7.00	2.1 ~ 7.7	1910	380 ~ 2260	3.66	A	955	8.3	7.00	7.20	A++	340	2.0 + 2.0
		3.5 + 5.0	8.5	3.09	4.41		7.50	2.2 ~ 8.4	2010	400 ~ 2340	3.73	A	1005	8.8	7.50	7.20	A++	365	1.7 + 2.4
		5.0 + 5.0	10.0	3.75	3.75		7.50	2.3 ~ 8.9	1930	460 ~ 2350	3.89	A	965	8.4	7.50	7.20	A++	365	2.2 + 2.2
	3 Room	2.0 + 2.0 + 2.0	6.0	2.00	2.00	2.00	6.00	2.1 ~ 8.8	1340	380 ~ 2270	4.48	A	670	5.9	6.00	8.00	A++	263	1.3 + 1.3 + 1.3
		2.0 + 2.0 + 2.5	6.5	2.00	2.00	2.50	6.50	2.1 ~ 8.8	1650	380 ~ 2270	3.94	A	825	7.2	6.50	8.00	A++	284	1.3 + 1.3 + 1.5
		2.0 + 2.0 + 3.5	7.5	2.00	2.00	3.50	7.50	2.1 ~ 8.8	1940	380 ~ 2190	3.87	A	970	8.5	7.50	8.00	A++	328	1.3 + 1.3 + 2.0
		2.0 + 2.0 + 5.0	9.0	1.67	1.67	4.17	7.50	2.2 ~ 9.4	1750	480 ~ 2290	4.29	A	875	7.6	7.50	8.00	A++	328	1.1 + 1.1 + 2.4
		2.0 + 2.5 + 2.5	7.0	2.00	2.50	2.50	7.00	2.1 ~ 8.8	1850	380 ~ 2270	3.78	A	925	8.1	7.00	8.00	A++	306	1.3 + 1.5 + 1.5
		2.0 + 2.5 + 3.5	8.0	1.88	2.34	3.28	7.50	2.1 ~ 8.8	1940	380 ~ 2190	3.87	A	970	8.5	7.50	8.00	A++	328	1.2 + 1.5 + 1.9
		2.0 + 2.5 + 5.0	9.5	1.58	1.97	3.95	7.50	2.2 ~ 9.4	1750	480 ~ 2290	4.29	A	875	7.6	7.50	8.00	A++	328	1.0 + 1.3 + 2.3
		2.0 + 3.5 + 3.5	9.0	1.67	2.92	2.92	7.50	2.1 ~ 8.9	1900	410 ~ 2200	3.95	A	950	8.3	7.50	8.00	A++	328	1.1 + 1.7 + 1.7
		2.0 + 3.5 + 5.0	10.5	1.43	2.50	3.57	7.50	2.2 ~ 9.4	1750	480 ~ 2240	4.29	A	875	7.6	7.50	8.00	A++	328	0.9 + 1.5 + 2.1
		2.5 + 2.5 + 2.5	7.5	2.50	2.50	2.50	7.50	2.1 ~ 8.8	1940	380 ~ 2270	3.87	A	970	8.5	7.50	8.00	A++	328	1.5 + 1.5 + 1.5
		2.5 + 2.5 + 3.5	8.5	2.21	2.21	3.09	7.50	2.1 ~ 8.8	1940	380 ~ 2190	3.87	A	970	8.5	7.50	8.00	A++	328	1.4 + 1.4 + 1.7
		2.5 + 2.5 + 5.0	10.0	1.88	1.88	3.75	7.50	2.2 ~ 9.4	1750	480 ~ 2290	4.29	A	875	7.6	7.50	8.00	A++	328	1.2 + 1.2 + 2.2
		2.5 + 3.5 + 3.5	9.5	1.99	2.76	2.76	7.50	2.1 ~ 8.9	1900	410 ~ 2200	3.95	A	950	8.3	7.50	8.00	A++	328	1.3 + 1.6 + 1.6
		2.5 + 3.5 + 5.0	11.0	1.71	2.39	3.41	7.50	2.2 ~ 9.4	1750	480 ~ 2240	4.29	A	875	7.6	7.50	8.00	A++	328	1.1 + 1.5 + 2.0
		3.5 + 3.5 + 3.5	10.5	2.50	2.50	2.50	7.50	2.1 ~ 9.0	1850	410 ~ 2200	4.05	A	925	8.1	7.50	8.00	A++	328	1.5 + 1.5 + 1.5

Type of Indoor: CS-HZ25/35ZKE wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-3Z75ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
		2.5 + 2.5	5.0	3.65	3.65		7.30	1.4 ~ 10.0	1500	330 ~ 2990	4.87	A	750	6.5	5.70	4.60	A++	1735	
	2 Room	2.5 + 3.5	6.0	3.42	4.78		8.20	1.4 ~ 10.1	1870	320 ~ 2990	4.39	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5	7.0	4.30	4.30		8.60	1.4 ~ 10.2	1980	330 ~ 2990	4.34	A	990	8.6	5.70	4.60	A++	1735	
		3 Room	2.5 + 2.5 + 2.5	7.5	2.87	2.87	2.87	8.60	1.7 ~ 10.6	1910	320 ~ 2860	4.50	A	955	8.3	5.70	4.60	A++	1735
	2.5 + 2.5 + 3.5		8.5	2.53	2.53	3.54	8.60	1.7 ~ 10.6	1900	320 ~ 2830	4.53	A	950	8.3	5.70	4.60	A++	1735	
	2.5 + 3.5 + 3.5		9.5	2.26	3.17	3.17	8.60	1.7 ~ 10.7	1870	330 ~ 2850	4.60	A	935	8.1	5.70	4.60	A++	1735	
	3.5 + 3.5 + 3.5		10.5	2.87	2.87	2.87	8.60	1.7 ~ 10.7	1820	320 ~ 2830	4.73	A	910	7.9	5.70	4.60	A++	1735	

Type of Indoor: CS-HZ25/35ZKE-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-3Z75ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.65	3.65		7.30	1.4 ~ 10.0	1500	330 ~ 2990	4.87	A	750	6.5	5.70	4.60	A++	1735	
		2.5 + 3.5	6.0	3.42	4.78		8.20	1.4 ~ 10.1	1870	320 ~ 2990	4.39	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5	7.0	4.30	4.30		8.60	1.4 ~ 10.2	1980	330 ~ 2990	4.34	A	990	8.6	5.70	4.60	A++	1735	
	3 Room	2.5 + 2.5 + 2.5	7.5	2.87	2.87	2.87	8.60	1.7 ~ 10.6	1910	320 ~ 2860	4.50	A	955	8.3	5.70	4.60	A++	1735	
		2.5 + 2.5 + 3.5	8.5	2.53	2.53	3.54	8.60	1.7 ~ 10.6	1900	320 ~ 2830	4.53	A	950	8.3	5.70	4.60	A++	1735	
		2.5 + 3.5 + 3.5	9.5	2.26	3.17	3.17	8.60	1.7 ~ 10.7	1870	330 ~ 2850	4.60	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5 + 3.5	10.5	2.87	2.87	2.87	8.60	1.7 ~ 10.7	1820	320 ~ 2830	4.73	A	910	7.9	5.70	4.60	A++	1735	

Type of Indoor: CS-HZ25/35ZKE-5 wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-3Z75ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.65	3.65		7.30	1.4 ~ 10.0	1500	330 ~ 2990	4.87	A	750	6.5	5.70	4.60	A++	1735	
		2.5 + 3.5	6.0	3.42	4.78		8.20	1.4 ~ 10.1	1870	320 ~ 2990	4.39	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5	7.0	4.30	4.30		8.60	1.4 ~ 10.2	1980	330 ~ 2990	4.34	A	990	8.6	5.70	4.60	A++	1735	
	3 Room	2.5 + 2.5 + 2.5	7.5	2.87	2.87	2.87	8.60	1.7 ~ 10.6	1910	320 ~ 2860	4.50	A	955	8.3	5.70	4.60	A++	1735	
		2.5 + 2.5 + 3.5	8.5	2.53	2.53	3.54	8.60	1.7 ~ 10.6	1900	320 ~ 2830	4.53	A	950	8.3	5.70	4.60	A++	1735	
		2.5 + 3.5 + 3.5	9.5	2.26	3.17	3.17	8.60	1.7 ~ 10.7	1870	330 ~ 2850	4.60	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5 + 3.5	10.5	2.87	2.87	2.87	8.60	1.7 ~ 10.7	1820	320 ~ 2830	4.73	A	910	7.9	5.70	4.60	A++	1735	

Type of Indoor: CS-HZ25/35ZKE-5-H wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign		SCOP		
	(kW)	W/W													CLASS				
CU-3Z75ABEC	1 Room	2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
	2 Room	2.5 + 2.5	5.0	3.65	3.65		7.30	1.4 ~ 10.0	1500	330 ~ 2990	4.87	A	750	6.5	5.70	4.60	A++	1735	
		2.5 + 3.5	6.0	3.42	4.78		8.20	1.4 ~ 10.1	1870	320 ~ 2990	4.39	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5	7.0	4.30	4.30		8.60	1.4 ~ 10.2	1980	330 ~ 2990	4.34	A	990	8.6	5.70	4.60	A++	1735	
	3 Room	2.5 + 2.5 + 2.5	7.5	2.87	2.87	2.87	8.60	1.7 ~ 10.6	1910	320 ~ 2860	4.50	A	955	8.3	5.70	4.60	A++	1735	
		2.5 + 2.5 + 3.5	8.5	2.53	2.53	3.54	8.60	1.7 ~ 10.6	1900	320 ~ 2830	4.53	A	950	8.3	5.70	4.60	A++	1735	
		2.5 + 3.5 + 3.5	9.5	2.26	3.17	3.17	8.60	1.7 ~ 10.7	1870	330 ~ 2850	4.60	A	935	8.1	5.70	4.60	A++	1735	
		3.5 + 3.5 + 3.5	10.5	2.87	2.87	2.87	8.60	1.7 ~ 10.7	1820	320 ~ 2830	4.73	A	910	7.9	5.70	4.60	A++	1735	

Type of Indoor: CS-Z20/25/35/50ZKEW wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
	Heating			Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			Pdesign (kW)	SCOP		ANNUAL CONSUMPTION (kWh)	
																W/W	CLASS		
CU-3Z75ABEC	1 Room	2.0	2.0	3.20			3.20	1.2 ~ 4.1	810	300 ~ 1160	3.95	A	405	4.0	-	-	-	-	
		2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
		5.0	5.0	6.80			6.80	1.2 ~ 7.7	2100	300 ~ 2520	3.24	C	1050	9.7	-	-	-	-	
	2 Room	2.0 + 2.0	4.0	3.25	3.25		6.50	1.4 ~ 10.0	1620	330 ~ 3420	4.01	A	810	7.0	-	-	-	-	
		2.0 + 2.5	4.5	3.07	3.83		6.90	1.4 ~ 10.0	1790	330 ~ 3330	3.85	A	895	7.8	5.60	4.40	A+	1782	
		2.0 + 3.5	5.5	2.84	4.96		7.80	1.4 ~ 10.0	2090	320 ~ 3240	3.73	A	1045	9.1	5.60	4.40	A+	1782	
		2.0 + 5.0	7.0	2.46	6.14		8.60	1.4 ~ 10.4	2310	290 ~ 3140	3.72	A	1155	10.0	5.60	4.40	A+	1782	
		2.5 + 2.5	5.0	3.65	3.65		7.30	1.4 ~ 10.0	1930	330 ~ 3180	3.78	A	965	8.4	5.60	4.40	A+	1782	
		2.5 + 3.5	6.0	3.42	4.78		8.20	1.4 ~ 10.1	2230	320 ~ 3180	3.68	A	1115	9.7	5.60	4.40	A+	1782	
		2.5 + 5.0	7.5	2.87	5.73		8.60	1.4 ~ 10.4	2310	290 ~ 3140	3.72	A	1155	10.0	5.60	4.40	A+	1782	
		3.5 + 3.5	7.0	4.30	4.30		8.60	1.4 ~ 10.2	2370	330 ~ 3180	3.63	A	1185	10.3	5.60	4.40	A+	1782	
		3.5 + 5.0	8.5	3.54	5.06		8.60	1.4 ~ 10.5	2250	280 ~ 3120	3.82	A	1125	9.8	5.60	4.40	A+	1782	
		5.0 + 5.0	10.0	4.30	4.30		8.60	1.4 ~ 10.7	1990	260 ~ 3020	4.32	A	995	8.6	5.60	4.40	A+	1782	
	3 Room	2.0 + 2.0 + 2.0	6.0	2.87	2.87	2.87	8.60	1.7 ~ 10.6	2020	320 ~ 3220	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.0 + 2.0 + 2.5	6.5	2.65	2.65	3.31	8.60	1.7 ~ 10.6	2020	320 ~ 3160	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.0 + 2.0 + 3.5	7.5	2.29	2.29	4.01	8.60	1.7 ~ 10.6	2000	320 ~ 3080	4.30	A	1000	8.7	5.60	4.60	A++	1704	
		2.0 + 2.0 + 5.0	9.0	1.91	1.91	4.78	8.60	1.6 ~ 10.8	1860	310 ~ 2780	4.62	A	930	8.1	5.60	4.60	A++	1704	
		2.0 + 2.5 + 2.5	7.0	2.46	3.07	3.07	8.60	1.7 ~ 10.6	2020	320 ~ 3070	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.0 + 2.5 + 3.5	8.0	2.15	2.69	3.76	8.60	1.7 ~ 10.6	2000	320 ~ 2940	4.30	A	1000	8.7	5.60	4.60	A++	1704	
		2.0 + 2.5 + 5.0	9.5	1.81	2.26	4.53	8.60	1.6 ~ 10.8	1860	310 ~ 2780	4.62	A	930	8.1	5.60	4.60	A++	1704	
		2.0 + 3.5 + 3.5	9.0	1.91	3.34	3.34	8.60	1.7 ~ 10.7	1980	330 ~ 2960	4.34	A	990	8.6	5.60	4.60	A++	1704	
		2.0 + 3.5 + 5.0	10.5	1.64	2.87	4.10	8.60	1.6 ~ 10.8	1850	310 ~ 2760	4.65	A	925	8.0	5.60	4.60	A++	1704	
		2.5 + 2.5 + 2.5	7.5	2.87	2.87	2.87	8.60	1.7 ~ 10.6	2020	320 ~ 2920	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.5 + 2.5 + 3.5	8.5	2.53	2.53	3.54	8.60	1.7 ~ 10.6	2000	320 ~ 2850	4.30	A	1000	8.7	5.60	4.60	A++	1704	
		2.5 + 2.5 + 5.0	10.0	2.15	2.15	4.30	8.60	1.6 ~ 10.8	1860	310 ~ 2780	4.62	A	930	8.1	5.60	4.60	A++	1704	
		2.5 + 3.5 + 3.5	9.5	2.26	3.17	3.17	8.60	1.7 ~ 10.7	1980	330 ~ 2870	4.34	A	990	8.6	5.60	4.60	A++	1704	
		2.5 + 3.5 + 5.0	11.0	1.96	2.74	3.91	8.60	1.6 ~ 10.8	1850	310 ~ 2760	4.65	A	925	8.0	5.60	4.60	A++	1704	
		3.5 + 3.5 + 3.5	10.5	2.87	2.87	2.87	8.60	1.7 ~ 10.7	1920	320 ~ 2850	4.48	A	960	8.3	5.60	4.60	A++	1704	

Type of Indoor: CS-NZ25/35/50YKE-1 wall mount series

Outdoor unit	Indoor unit capacity		Total	Heating Capacity (kW)					Input Power (W)		COP		ANNUAL ENERGY CONSUMPTION (kWh)	Current, 230V (A)	ERP				MOISTURE REMOVAL VOLUME l/h
				Room A	Room B	Room C	Total	min ~ max	Rating	min ~ max	W/W	CLASS			SCOP		ANNUAL CONSUMPTION (kWh)		
	Heating	(kW)													W/W	CLASS			
CU-3275ABEC	1 Room	2.0	2.0	3.20			3.20	1.2 ~ 4.1	810	300 ~ 1160	3.95	A	405	4.0	-	-	-	-	
		2.5	2.5	3.60			3.60	1.2 ~ 4.3	940	300 ~ 1190	3.83	A	470	4.7	-	-	-	-	
		3.5	3.5	4.50			4.50	1.2 ~ 5.8	1230	300 ~ 1950	3.66	A	615	6.0	-	-	-	-	
		5.0	5.0	6.80			6.80	1.2 ~ 7.7	2100	300 ~ 2520	3.24	C	1050	9.7	-	-	-	-	
	2 Room	2.0 + 2.0	4.0	3.25	3.25		6.50	1.4 ~ 10.0	1620	330 ~ 3420	4.01	A	810	7.0	-	-	-	-	
		2.0 + 2.5	4.5	3.07	3.83		6.90	1.4 ~ 10.0	1790	330 ~ 3330	3.85	A	895	7.8	5.60	4.40	A+	1782	
		2.0 + 3.5	5.5	2.84	4.96		7.80	1.4 ~ 10.0	2090	320 ~ 3240	3.73	A	1045	9.1	5.60	4.40	A+	1782	
		2.0 + 5.0	7.0	2.46	6.14		8.60	1.4 ~ 10.4	2310	290 ~ 3140	3.72	A	1155	10.0	5.60	4.40	A+	1782	
		2.5 + 2.5	5.0	3.65	3.65		7.30	1.4 ~ 10.0	1930	330 ~ 3180	3.78	A	965	8.4	5.60	4.40	A+	1782	
		2.5 + 3.5	6.0	3.42	4.78		8.20	1.4 ~ 10.1	2230	320 ~ 3180	3.68	A	1115	9.7	5.60	4.40	A+	1782	
		2.5 + 5.0	7.5	2.87	5.73		8.60	1.4 ~ 10.4	2310	290 ~ 3140	3.72	A	1155	10.0	5.60	4.40	A+	1782	
		3.5 + 3.5	7.0	4.30	4.30		8.60	1.4 ~ 10.2	2370	330 ~ 3180	3.63	A	1185	10.3	5.60	4.40	A+	1782	
		3.5 + 5.0	8.5	3.54	5.06		8.60	1.4 ~ 10.5	2250	280 ~ 3120	3.82	A	1125	9.8	5.60	4.40	A+	1782	
		5.0 + 5.0	10.0	4.30	4.30		8.60	1.4 ~ 10.7	1990	260 ~ 3020	4.32	A	995	8.6	5.60	4.40	A+	1782	
	3 Room	2.0 + 2.0 + 2.0	6.0	2.87	2.87	2.87	8.60	1.7 ~ 10.6	2020	320 ~ 3220	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.0 + 2.0 + 2.5	6.5	2.65	2.65	3.31	8.60	1.7 ~ 10.6	2020	320 ~ 3160	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.0 + 2.0 + 3.5	7.5	2.29	2.29	4.01	8.60	1.7 ~ 10.6	2000	320 ~ 3080	4.30	A	1000	8.7	5.60	4.60	A++	1704	
		2.0 + 2.0 + 5.0	9.0	1.91	1.91	4.78	8.60	1.6 ~ 10.8	1860	310 ~ 2780	4.62	A	930	8.1	5.60	4.60	A++	1704	
		2.0 + 2.5 + 2.5	7.0	2.46	3.07	3.07	8.60	1.7 ~ 10.6	2020	320 ~ 3070	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.0 + 2.5 + 3.5	8.0	2.15	2.69	3.76	8.60	1.7 ~ 10.6	2000	320 ~ 2940	4.30	A	1000	8.7	5.60	4.60	A++	1704	
		2.0 + 2.5 + 5.0	9.5	1.81	2.26	4.53	8.60	1.6 ~ 10.8	1860	310 ~ 2780	4.62	A	930	8.1	5.60	4.60	A++	1704	
		2.0 + 3.5 + 3.5	9.0	1.91	3.34	3.34	8.60	1.7 ~ 10.7	1980	330 ~ 2960	4.34	A	990	8.6	5.60	4.60	A++	1704	
		2.0 + 3.5 + 5.0	10.5	1.64	2.87	4.10	8.60	1.6 ~ 10.8	1850	310 ~ 2760	4.65	A	925	8.0	5.60	4.60	A++	1704	
		2.5 + 2.5 + 2.5	7.5	2.87	2.87	2.87	8.60	1.7 ~ 10.6	2020	320 ~ 2920	4.26	A	1010	8.8	5.60	4.60	A++	1704	
		2.5 + 2.5 + 3.5	8.5	2.53	2.53	3.54	8.60	1.7 ~ 10.6	2000	320 ~ 2850	4.30	A	1000	8.7	5.60	4.60	A++	1704	
		2.5 + 2.5 + 5.0	10.0	2.15	2.15	4.30	8.60	1.6 ~ 10.8	1860	310 ~ 2780	4.62	A	930	8.1	5.60	4.60	A++	1704	
		2.5 + 3.5 + 3.5	9.5	2.26	3.17	3.17	8.60	1.7 ~ 10.7	1980	330 ~ 2870	4.34	A	990	8.6	5.60	4.60	A++	1704	
		2.5 + 3.5 + 5.0	11.0	1.96	2.74	3.91	8.60	1.6 ~ 10.8	1850	310 ~ 2760	4.65	A	925	8.0	5.60	4.60	A++	1704	
		3.5 + 3.5 + 3.5	10.5	2.87	2.87	2.87	8.60	1.7 ~ 10.7	1920	320 ~ 2850	4.48	A	960	8.3	5.60	4.60	A++	1704	

Specifications are subject to change without notice for further improvement.