



## DETAILS




1. Items suitable for refrigerated topping unit (VRX 14/33 and VRX 14/38)
2. All shelves mounted with anti-tipping system
3. Curved edge for easy cleaning

## GENERAL FEATURES

|   |   |
|---|---|
| GN2/1 Refrigerated upright cabinet (GLASS DOOR) | • |
| Stainless Steel exterior and interior           | • |
| Ventilated Cooling                              | • |
| Automatic compressor cycle defrost              | • |
| Engine made with "Cassette system"              | • |
| Foaming Agent Cyclopentane (75mm per side)      | • |
| Digital thermostat                              | • |
| Removable Gasket                                | • |
| LED light and lock fitted as standard           | • |
| Door with self closing door                     | • |
| Adjustable shelves GN2/1: 9 + 3 + 6 middle      | • |
| N.6 Wheels for easy positioning                 | • |

## SIZES

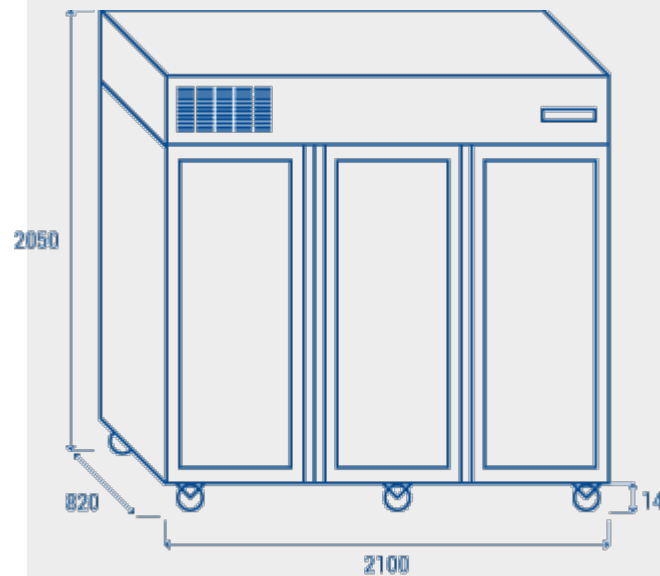

## TECHNICAL SPECIFICATION

|                   |             |
|-------------------|-------------|
| INNER DEPTH       | 685 mm      |
| INNER HEIGHT      | 1435 mm     |
| INNER WIDTH       | 1950 mm     |
| DEPTH             | 820 mm      |
| HEIGHT            | 2050 mm     |
| WIDTH             | 2100 mm     |
| KW/24H            | 6.3 Kw      |
| CAPACITY          | 1770 L      |
| NOISE LEVEL       | 73 dB(A)    |
| CONSUMPTION       | 1120 W      |
| NET WEIGHT        | 267 Kg      |
| TEMPERATURE RANGE | +3° ~ +10°C |

## CERTIFICATIONS

