



DETAILS




1. The items can be supplied either with adjustable feet or lockable castor
2. Adjustable shelves GN1/1: 4 (N.2 for each door)
3. Curved edge for easy cleaning
4. Unit assembled with thermostatic valve (TX for R134a)
5. Evaporator with anti-corrosion treatment

GENERAL FEATURES

| | |
|---|---|
| GN1/1 Freezer counter (REMOTE ENGINE) | • |
| Stainless Steel exterior and interior | • |
| Ventilated Cooling | • |
| Automatic defrost with electric heater | • |
| Foaming Agent Cyclopentane (60mm per side) | • |
| Digital Thermostat | • |
| Plastic thermal-braker as chamber body frame (Hot pipe system) | • |
| Door: Self closing and reversible door fitted as standard | • |
| Removable Gasket | • |
| Evaporator with anti-corrosion treatment | • |
| Adjustable shelves GN1/1: 6 (N.2 for each door) | • |
| N.4 S/S Adjustable feet - (Lockable castor as Optional) | • |
| Expansion valve/Solenoid Valve set (Optional): for gas R452A or R404a | • |
| Splash back height (100mm) | • |

SIZES

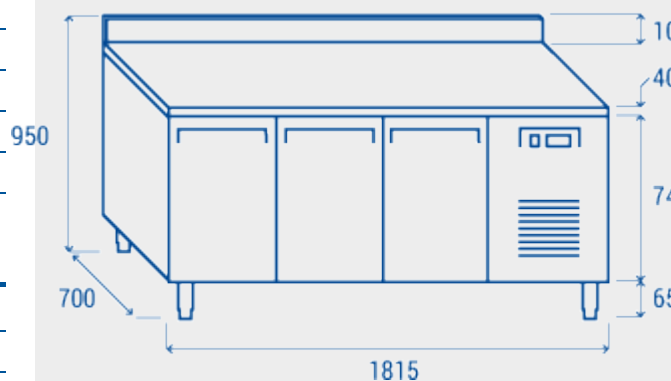

TECHNICAL SPECIFICATION

| | |
|-------------------|--------------|
| INNER DEPTH | 560 mm |
| INNER HEIGHT | 605 mm |
| INNER WIDTH | 1230 mm |
| DEPTH | 700 mm |
| HEIGHT | 950 mm |
| WIDTH | 1815 mm |
| KW/24H | N/A Kw |
| CAPACITY | 310 L |
| NOISE LEVEL | N/A |
| CONSUMPTION | 100 W |
| NET WEIGHT | 113 Kg |
| TEMPERATURE RANGE | -22° ~ -18°C |

CERTIFICATIONS

