

E-PROOF för godkännande

05/06/26, 10:36:52

Order nummer
Märkning
Artikel

: 7617796
: 20087320 - DO
: Addie sublimation lanyard with safety breakaway

Mikael Edström Produkter AB



SUBLIMATION LANYARD 20mm K1 + D8

Colour space: CMYK
Dimensions: 20 x 900 mm (+2%)
Care Label: No



PLEASE CHECK:

COLOURS
Colours on fabric will closely match CMYK or Pantone. To ensure accuracy, order a colour sample.
Complaints are considered only if a sample was requested.

DESIGN
Please save format as: pdf, eps, ai
Minimum resolution: 300 DPI

FONTS AND LINES
Fonts must be in curves. Recommended minimum size of text is 6 pt (Arial).
Recommended minimum line thickness is 0,2 mm



PRINT AREA
Artwork outside the safe area may be cut or stitched over.
Placement tolerance is ±2 mm in height and additional ±5 mm in width on fitted; size may vary up to 2%.

FITTED
The distances between the logos are ALWAYS the same on the back and front.
The standard product does not include fitted logos between the inside and outside.
Fitting logos is an extra cost and must be requested during inquiry or order.

Print visualization, fold along red line, check whether the project meets your expectations! Graphics contains small elements, print visualization on a scale of 1:1 to check readability!

Placing the order or accepting this project means that you are familiar with presented technical information, and you agree with it.

MAX LOGO HEIGHT - 16mm
YOUR LOGO HEIGHT -16xmm
WHITE COLOR MAY BE BLURRED

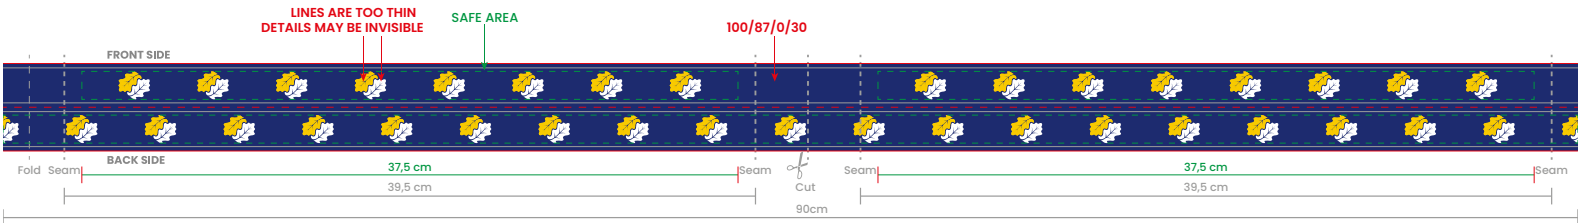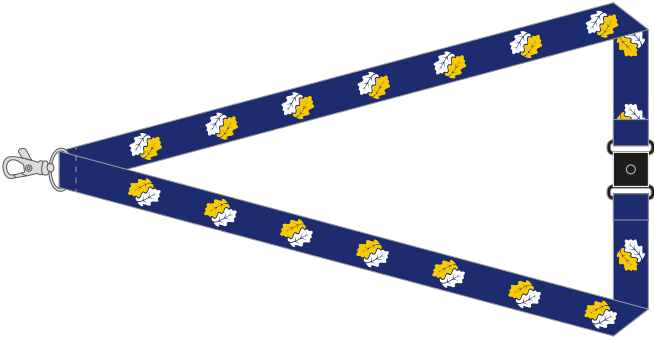

Tryckposition:
all over, fram;

Märknings metod:
Sublimering

Artikel:

BLACK/WHITE
1PL0050G 20 250pcs
1PL0050G 20 250pcs

E-PROOF för godkännande

05/06/26, 10:36:52

Order nummer
Märkning
Artikel

: 7617796
: 20087320 - DO
: Addie sublimation lanyard with safety breakaway

Mikael Edström Produkter AB



SUBLIMATION LANYARD 20mm K1 + D8

Colour space: CMYK
Dimensions: 20 x 900 mm (+2%)
Care Label: No



PLEASE CHECK:

COLOURS
Colours on fabric will closely match CMYK or Pantone. To ensure accuracy, order a colour sample.
Complaints are considered only if a sample was requested.

DESIGN
Please save format as: pdf, eps, ai
Minimum resolution: 300 DPI

FONTS AND LINES
Fonts must be in curves. Recommended minimum size of text is 6 pt (Arial).
Recommended minimum line thickness is 0,2 mm



PRINT AREA
Artwork outside the safe area may be cut or stitched over.
Placement tolerance is ±2 mm in height and additional ±5 mm in width on fitted; size may vary up to 2%.

FITTED
The distances between the logos are ALWAYS the same on the back and front.
The standard product does not include fitted logos between the inside and outside.
Fitting logos is an extra cost and must be requested during inquiry or order.

Print visualization, fold along red line, check whether the project meets your expectations! Graphics contains small elements, print visualization on a scale of 1:1 to check readability!

Placing the order or accepting this project means that you are familiar with presented technical information, and you agree with it.

MAX LOGO HEIGHT - 16mm
YOUR LOGO HEIGHT -16xmm
WHITE COLOR MAY BE BLURRED

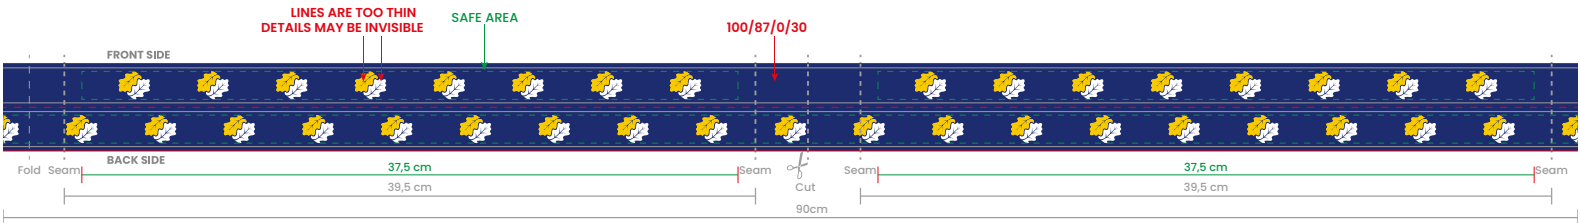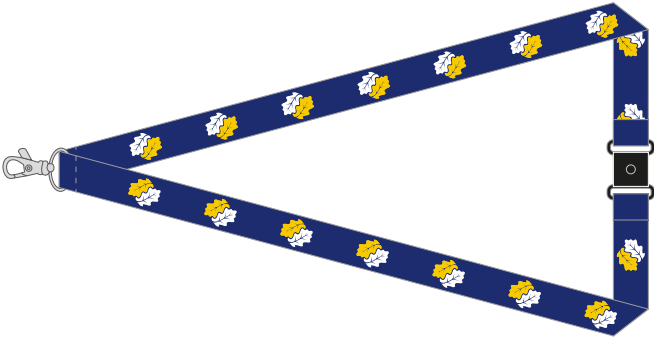

Tryckposition:
all over, bak;

Märknings metod:
Sublimering

Artikel:

BLACK/WHITE
1PL0050G 20 250pcs
1PL0050G 20 250pcs