



DWL12D2/D4

12" SUBWOOFER

Features:

Heavy gauge stamped basket;
Kevlar fiber reinforced non-press paper cone
Red stitched EROM foam surround;
2.5" 4-layer round copper wire voice coil;
Reliable red poly-cotton 2-pc spiders;
Double stacked 120oz Strontium magnets;
Direct VC cooling motor design;
Push terminal;
Rubber magnet boot and rubber gasket;
DVC2 or DVC4-ohm Impedance;
600W RMS power and 1200W MAX power

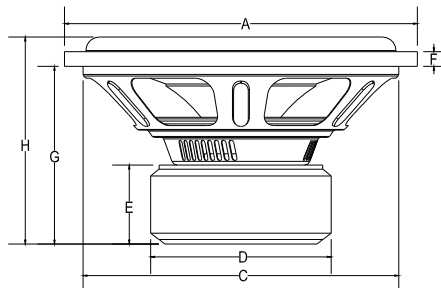

DWL12D2/D4 DIMENSIONS

Dimensions	Value	DWL12D2/D4	
Diameter A	mm	316	316
Diameter B	mm	296	296
Diameter C	mm	285	285
Diameter D	mm	162	162
Depth E	mm	70	70
Depth F	mm	14	14
Depth G	mm	154	154
Depth H	mm	179	179

DWL12D2/D4 subwoofer T/S Parameters

	Imp	Dcr	Fs	SD	BL	Qms	Qes	Qts	n	SPLo	Vas	Cms	Mms	Mmd	Xmax	Vd
Model	ohm	ohm	Hz	msqM	Tm					dB	L	µm/N	g	g	±mm	L
DWL12D2	1	0.9	33.2	51.07	10.20	4.435	0.492	0.442	0.321	87.1	33.20	89.63	241.84	235.20	13.0	3.99
DWL12D2	4	0.9	33.4	51.07	19.47	4.259	0.479	0.431	0.337	87.3	35.24	95.14	212.29	205.65	13.0	3.99
DWL12D4	2	1.7	34.3	51.07	11.45	4.083	0.576	0.504	0.294	86.7	36.60	98.81	194.47	187.84	13.0	3.99
DWL12D4	8	6.8	34.2	51.07	24.92	4.114	0.525	0.465	0.281	86.5	34.93	94.31	216.54	209.91	13.0	3.99

*Above parameters are tested after each subwoofer was break-in under 600W power for 8hours.

*Due to continuous pursuit of performance, specifications change without prior notice.