


Connessione a Puntale "Splice" per fili smaltati

Point Connection "Splice" for magnet wire

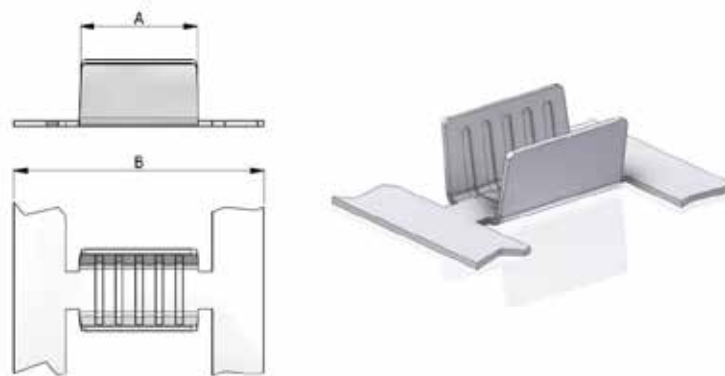

Codice P.N.	Sezione Cavo Wire Range	Ø Filo Ø Wire	Spessore Thickness	A	B	Q.tà Q.ty	Conf. Pack	Materiale Material
10219-000	0.01 ÷ 0.40	0.08 ÷ 0.70	0.30	3.6	8.00	50.000	2/4	CuZn
10219-011	0.01 ÷ 0.40	0.08 ÷ 0.70	0.30	3.6	8.00	30.000	2/4	CuZnSn
10220-000	0.25 ÷ 1.32	0.22 ÷ 1.20	0.40	4.6	10.00	15.000	2/4	CuZn
10220-011	0.25 ÷ 1.32	0.22 ÷ 1.20	0.40	4.6	10.00	15.000	2/4	CuZnSn
10221-000	0.72 ÷ 2.05	0.50 ÷ 1.50	0.45	5.8	11.00	10.000	2/4	CuZn
10221-011	0.72 ÷ 2.05	0.50 ÷ 1.50	0.45	5.8	11.00	10.000	2/4	CuZnSn