



Terminale Femmina 6.3x0.8

Female Terminal 6.3x0.8

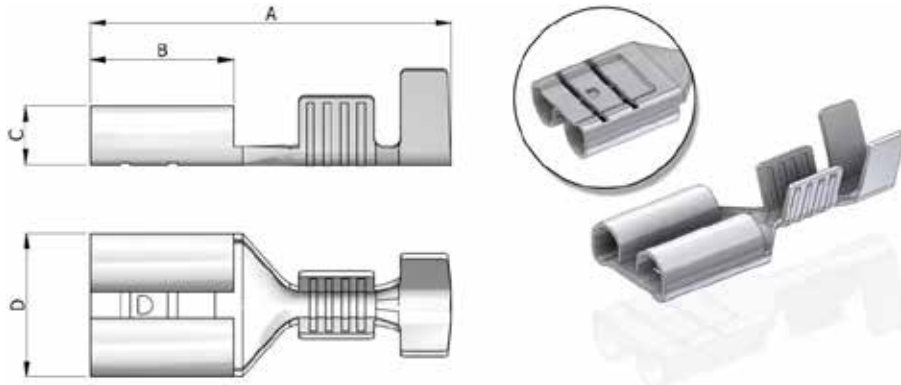

Codice P.N.	Sezione Cavo Wire Range	Ø Isolante Ø Insulation	Spessore Thickness	A	B	C	D	Q.tà Q.ty	Conf. Pack	Materiale Material
10610-000	0.5 ÷ 1.50	1.9 ÷ 3.3	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZn
10610-011	0.5 ÷ 1.50	1.9 ÷ 3.3	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZnSn
10610-050	0.5 ÷ 1.50	1.9 ÷ 3.3	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuNiZn
10611-000	1.0 ÷ 2.50	2.5 ÷ 4.0	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZn
10611-011	1.0 ÷ 2.50	2.5 ÷ 4.0	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZnSn
10611-050	1.0 ÷ 2.50	2.5 ÷ 4.0	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuNiZn

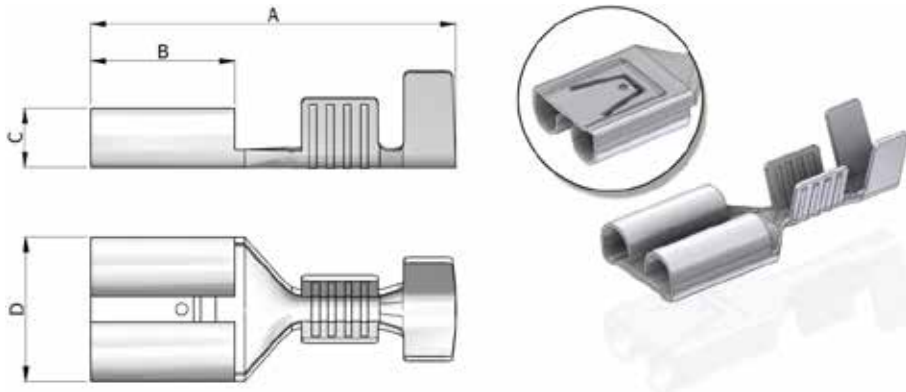

Inserimento Morbido

Low insertion Force

Codice P.N.	Sezione Cavo Wire Range	Ø Isolante Ø Insulation	Spessore Thickness	A	B	C	D	Q.tà Q.ty	Conf. Pack	Materiale Material
10616-000	0.5 ÷ 1.50	1.9 ÷ 3.3	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZn
10616-011	0.5 ÷ 1.50	1.9 ÷ 3.3	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZnSn
10617-000	1.0 ÷ 2.50	2.5 ÷ 4.0	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZn
10617-011	1.0 ÷ 2.50	2.5 ÷ 4.0	0.42	19.2	7.7	3.1	7.6	5.000	2/4	CuZnSn