


NEO Z150-0dB

Intel® N150 Fanless Mini PC

- Intel Twin Lake Processor N150, up to 3.6GHz
- ZERO db Cooling System
- Dual Display Ready: 2 x HDMI® 2.1 TMDs (4K@60Hz)
- Memory: 8/16GB DDR4-3200, upgradeable to 32GB
- Storage: 256/512GB SSD (PCIe 3.0 x4), upgradeable to 4TB
- Intel® Dual Band Wi-Fi (2.4GHz/5GHz), BT
- RJ-45 2.5 Gigabit Fast Ethernet
- Housing Material: Aluminum, Galvanized Steel (SGCC)
- VESA Mount Included
- Wake On LAN, AC Power Loss, RTC Wake Up
- Windows 11 Pro (64-bit) Pre-installed



Fanless Design



Intel® N150 (64-bit)



2.5G Ethernet



Dual 4K@60Hz Video Output



Dual Display Ready




802.11ax Dual Band Wi-Fi 6 (Optional)



Windows 11 Pro

Product Overview

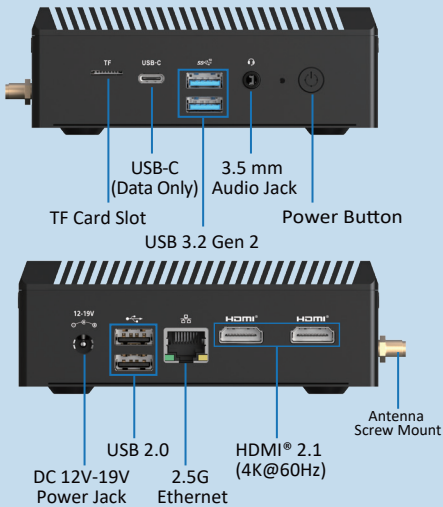

I/O Interfaces

- **LAN Port**1 x RJ45, 10M/100M/1000M/2.5 Gigabit Fast Ethernet
- **USB Ports**1 x USB 3.2 Gen 2 Type-C (Data Only, up to 10Gbps), 2 x USB 3.2 Gen 2 Type-A (10Gbps), 2 x USB 2.0
- **Audio Jack**3.5mm Audio Jack (Earphone+Micphone, 2-in-1)
- **Display Output**2 x HDMI® 2.1 TMDs (4K@60Hz), 3840X2160@60Hz
- **Antenna**2 x External Wi-Fi Antennas
- **Power Button**1 x Power Button
- **Reset Button**1 x Clear CMOS Button (Reset BIOS)
- **Power Jack**1 x 12V-19V DC-IN Jack

Specifications

System Hardware

- **BIOS**AMI EFI X64
- **Processor**Intel® Twin Lake Processor N150, (Max Turbo Frequency 3.60 GHz)
- **Graphics Engine**Intel® UHD Graphics
- **Memory**8/16GB DDR4-3200MHZ(SO-DIMM), upgradeable to 32GB Max.
- **Storage**256/512GB M.2 PCIe 3.0 x4 NVMe SSD, upgradeable to 4TB Max.
- **Ethernet**1 x RTL8125BG-CG 2.5 Gigabit Ethernet
- **LED Indicators**LEDs for Power, LAN (Active, Status)
- **WIFI/BT**Intel® Wireless-AX101 / AX201 (Dual Band AX Wi-Fi)

General

- **Certification**CE, FCC, RoHS
- **Dimensions (WxDxH)**123x120x46mm (4.84"x4.72"x1.81")
- **Form Factor**Mini PC
- **Encloser**Metal Housing
- **Net Weight**0.89 kg
- **Gross Weight**1.65 kg
- **Power Requirement**12V/3A DC-IN
- **Power Consumption**12W (Typical), 25W (Max)

Environment

- **Operating Temperature**0 ~ 50°C @ 5 ~ 85% RH
- **Storage Temperature**-20 ~ 70°C
- **Relative Humidity**10 ~ 95% RH @ 40 °C/104 °F, non-condensing