




L O U D
O F S W E D E N

Transmitter & volume control B2 & B2D Baseunit

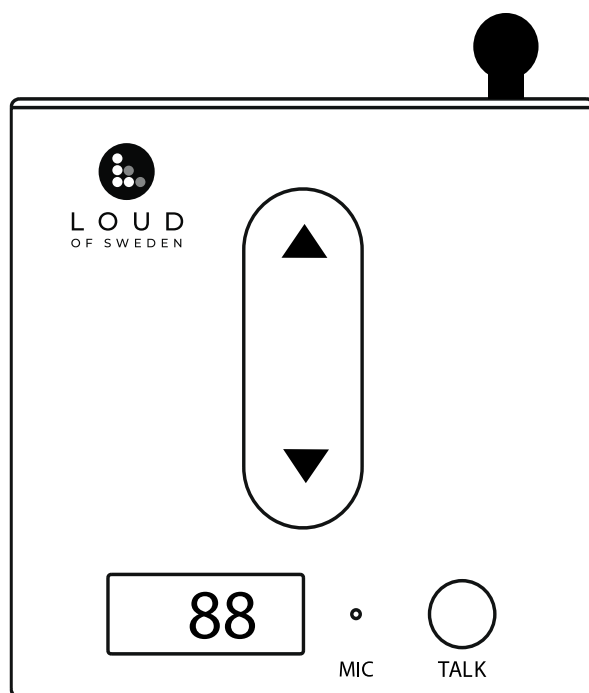

Transmitter
Volume control
Wireless Local Gateway 2.0
Announcement function
Dante connection for B2D
Mounting for wall available
4 individual volume zones, A, B, C, D
Pairing system

Operating wireless frequency	1.9 GHz DECT, Wireless Local Gateway 2.0
Frequency range	20 - 18 000 Hz
Operating range	> 350m in line of sight
Latency	16ms
Power	5V, 1A USB-C
Power consumption, operation	Maximum 2,4 W
Input	Unbalanced 3,5 mm aux
Input Digital	RJ45 (B2D)
Weight	227g
Width	110 mm
Depth	26 mm
Height	110 mm
Colour	White