


丝印位置

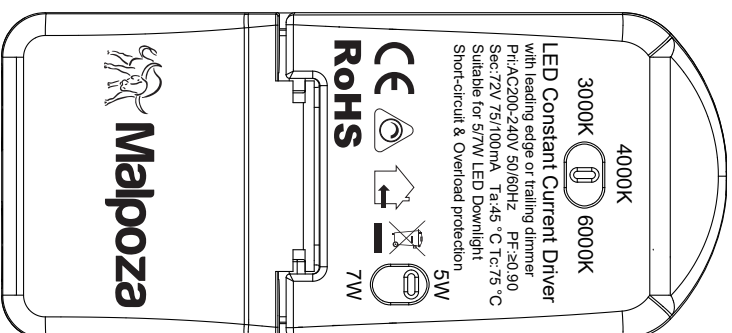

丝印内容

4000K
3000K 6000K

LED Constant Current Driver
with leading edge or trailing dimmer
Pfr:AC200-240V 50/60Hz PF:≥0.90
Sec:72V 75/100mA Ta:45 °C Tc:75 °C
Suitable for 5/7W LED Downlight
Short-circuit & Overload protection

5W
7W

CE
RoHS

Malpoza