




· LED Linear Light

Lidu21

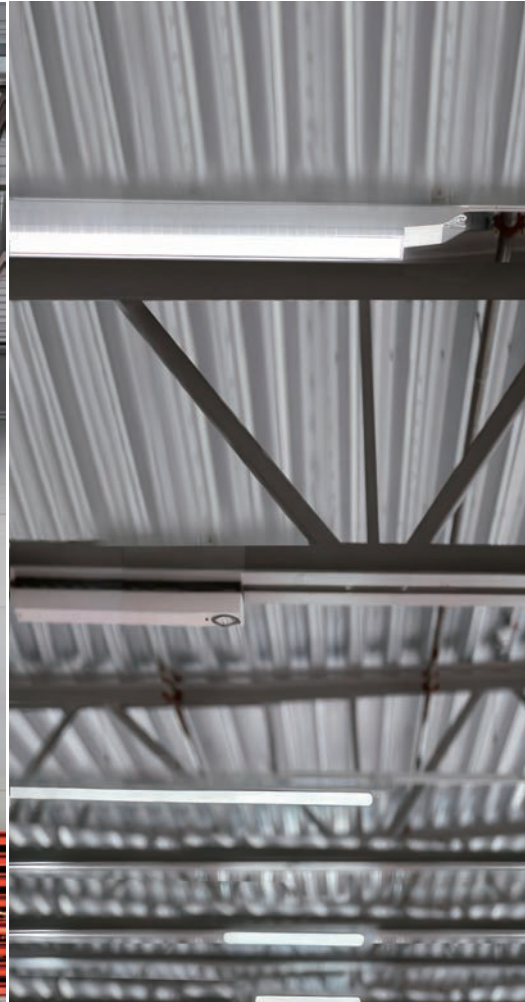


Features

- Power switchable
- Own Tooling
- Innovative on optics
- Up to 180 LM/W
- Optional beam angle
- White housing
- Flicker-free
- Osram /Philips /Boke driver

Applications


- Shop
- Warehouse
- Factory
- Sport Ball
- Exhibition Hall

Dimension (mm)

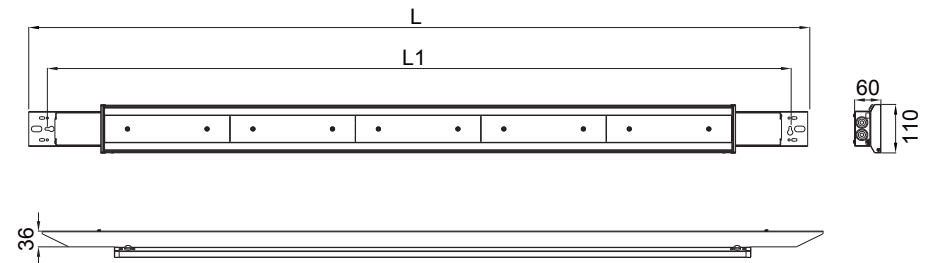

L	L1
1208	1123
1782	1697

Optional Beam Angle

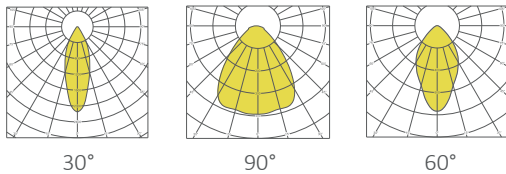

IP23

5
Quality


L80
80,000 H



Datasheet

Voltage	AC220 - 240V, 50/60Hz
Weight	5.3KG
Consistency	< 3 or < 5 SDCM
CRI (Ra)	> 80
Operating temperature	-20 bis +45°
Life time	80.000H (L80B10)
CCT	4000K
Function	No-Dimmable / DALI

Features

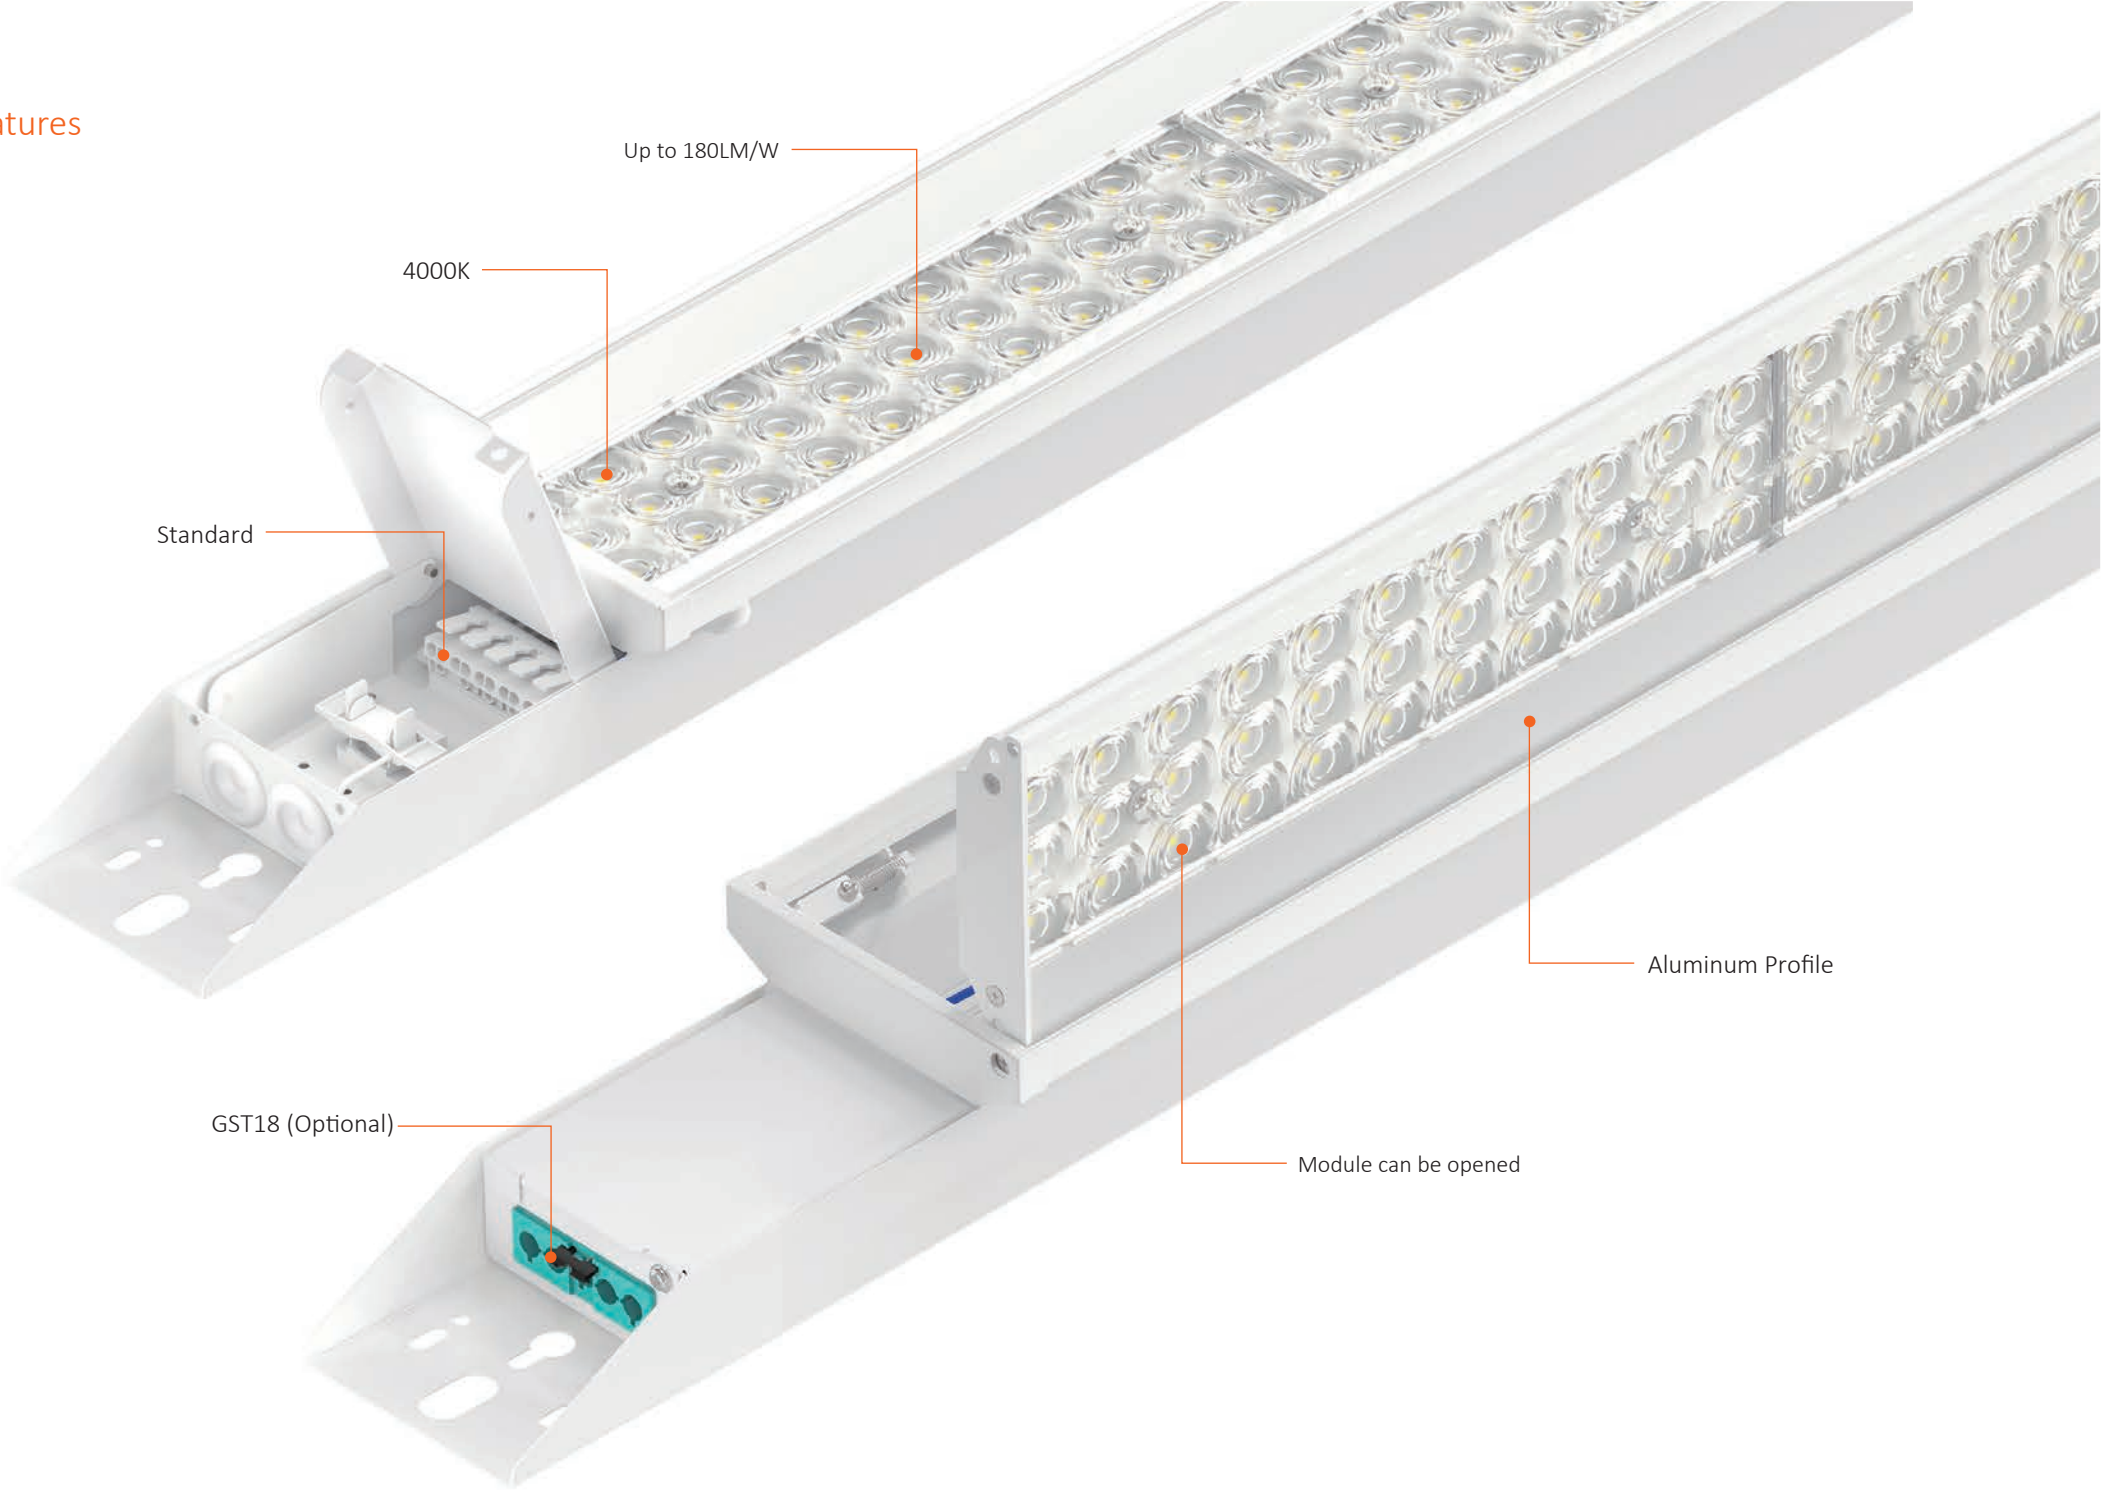

Up to 180LM/W

4000K

Standard

Aluminum Profile

GST18 (Optional)

Module can be opened

ITEM	Model No.	Length	Power (W)	Luminous @4000K		Beam Angle	Driver					Wired-Through
				Lumen (LM)	LM/W		Brand	Inrush current	B16	Input Voltage	Function	
1	L213P-56-S2	1208mm	56-51-40-36W by Switch	9,450	170	90°/60°/30°	Osram	30.9 A,220 μs	19	AC220-240V	ON/OFF	3x1.5 mm² wires/ 3x2.5 mm² wires/ 5x1.5 mm² wires/ 5x2.5 mm² wires/ 7x1.5 mm² wires/ 7x2.5 mm² wires
	L213A-60-P4	1208mm	60W	10,200	170	90°/60°/30°	Philips	25.1 A,214 μs	21	AC220-240V	DALI2	
	L213A-75-P4	1208mm	75W	12,350	165	90°/60°/30°	Philips	25 A,230 μs	20	AC220-240V	DALI2	
2	L215H-75-S2	1782mm	MAX75W	12,700	172	90°/60°/30°	Osram	30.9 A,220 μs	19	AC220-240V	ON/OFF	
	L215P-80-P1	1782mm	MAX80W	13,600	175	90°/60°/30°	Philips	19 A,280 μs	24	AC220-240V	ON/OFF	
	L215A-96-P1	1782mm	96-85-76-66W by Switch	17,000	178	90°/60°/30°	Philips	58 A,156 μs	12	AC220-240V	ON/OFF	
	L215A-136-P1	1782mm	136-115-96-76W by Switch	22,850	168	90°/60°/30°	Philips	40A,249 μs	11	AC220-240V	ON/OFF	
	L215A-90-P4	1782mm	MAX 90W	16,000	178	90°/60°/30°	Philips	25 A,230 μs	20	AC220-240V	DALI2	
	L215A-136-P4	1782mm	MAX 136W	22,850	168	90°/60°/30°	Philips	5.1A,760 μs	16	AC220-240V	DALI2	

ITEM	Model No.	Length	Power (W)	Luminous @4000K		Beam Angle	Driver					Wired-Through
				Lumen (LM)	LM/W		Brand	Inrush current	B16	Input Voltage	Function	
1	L213P-56-BD	1208mm	56-51-40-36W by Switch	9,450	170	90°/60°/30°	Boke	20.94A 254us	21	AC220-240V	ON/OFF	3x1.5 mm² wires/ 3x2.5 mm² wires/ 5x1.5 mm² wires/ 5x2.5 mm² wires/ 7x1.5 mm² wires/ 7x2.5 mm² wires
	L213A-60-B4	1208mm	60W	10,200	170	90°/60°/30°	Boke	17.81A 288us	21	AC220-240V	DALI2	
	L213A-75-B4	1208mm	75W	12,350	165	90°/60°/30°	Boke	17.81A 288us	21	AC220-240V	DALI2	
2	L215H-80-BD	1782mm	MAX75W	12,700	172	90°/60°/30°	Boke	20.94A 254us	21	AC220-240V	ON/OFF	
	L215P-80-B4	1782mm	MAX80W	13,000	175	90°/60°/30°	Boke	17.81A 288us	21	AC220-240V	DALI2	
	L215A-100-B4	1782mm	MAX 100W	17,500	175	90°/60°/30°	Boke	23.5A 416us	10	AC220-240V	DALI2	
	L215A-136-B4	1782mm	MAX 136W	22,850	168	90°/60°/30°	Boke	31A 420us	8	AC220-240V	DALI2	