


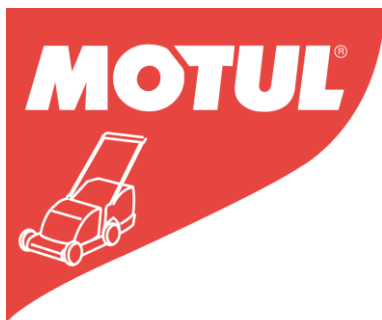

# GARDEN 4T 15W-40

**4 Stroke Engine Oil for Motorized Garden Tools**

**Gasoline and Diesel Engine**

**SAE 15W-40**

## TYPE OF USE

**Specially formulated for motorized garden tools and small farming equipment.**

**All Gasoline and Diesel 4 Stroke engines naturally aspirated or turbocharged.**

Lawn mowers, motor mowers, ride on mowers, tillers, light tractors,...

Suitable for all types of fuel: leaded and unleaded gasoline, Diesel fuel, Ethanol, biofuels.

All types of 4 stroke engines with or without catalytic converter.

## PERFORMANCE

STANDARDS                      API SF / CD

Ensures the engine cleanliness.

Protection during wintering.

Dispersant and detergent properties.

Good cold starting, perfectly stable in a hot engine.

Anti-oxidation, Anti-wear properties.

Anti-corrosion, Anti-foam properties.

## RECOMMENDATIONS

Oil change: According to manufacturers' requirements and adjust according to your own use.

MOTUL GARDEN 4T SAE 15W-40 can be mixed with synthetic or mineral lubricants.

## PROPERTIES

|                            |            |                         |
|----------------------------|------------|-------------------------|
| Viscosity grade            | SAE J 300  | <b>15W-40</b>           |
| Density at 20°C (68°F)     | ASTM D1298 | 0.877                   |
| Viscosity at 40°C (104°F)  | ASTM D445  | 99.1 mm <sup>2</sup> /s |
| Viscosity at 100°C (212°F) | ASTM D445  | 13.4 mm <sup>2</sup> /s |
| Viscosity index (VIE)      | ASTM D2270 | 134                     |
| Flash point                | ASTM D92   | 234°C / 453.2°F         |
| Pour point                 | ASTM D97   | -33°C / -27.4°F         |
| TBN                        | ASTM D2896 | 7.85 mg KOH/g           |