


Part No. 906012S1

SKYLORD EXP DUO
WARNING / REVERSE

- ✓ E-APPROVED
- ✓ 4000 LUMENS
- ✓ IP69K

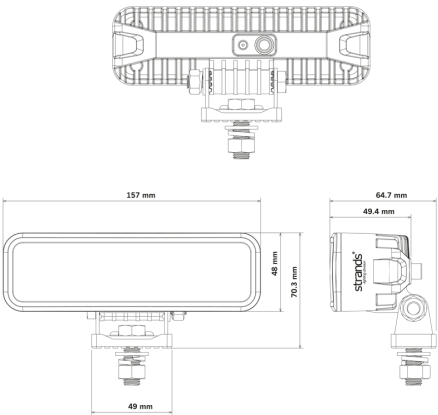

SKYLORD EXP DUO WARNING / REVERSE LIGHT 40W

SKYN1 EXP | REVERSE / WARNING LIGHT | 907851S1

The Skylord EXP Duo warning and reverse light is developed for users who demand maximum functionality, smarter installation, and seamless wireless control.

[Read more](#)



Voltage (DC)	10-32 V DC	Material housing/chassi	Thermal plastic
Consumption	42 W	Material lens	Polycarbonate
Functions	Warning light, Reverse light	Length	157 mm
Consumption specific function	Reverse light: 42W, Warning light: 2.8W	Depth	64.7 mm
Actual lumen	4050 lm	Height	48 mm
1 lux @	38 m	Height including bracket	70.3 mm
Color temperature	5700 K	IP-class	IP69K
Beam pattern	Flood beam	Operating temperature	-35 · +60 °C
Connection	DT-2PIN	E-approved	Yes
Cable length	550 mm	ECE approval	R23, R65 Class 2, R10.07, CE-RED