




MORE ON
OUR WEBSITE



Carico Statico
Static Load
Charge Statique
Statische Belastung
Carga Estática

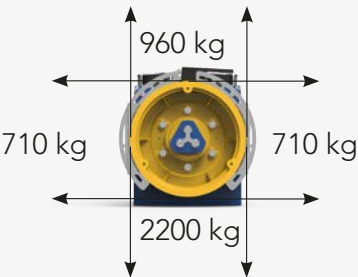



Peso
Weight
Poids
Gewicht
Peso

132 kg

Momento Torcente Nominal Torque Torsions moment Drehmoment Par de Torsión	Coppia di corto circuito Short circuited torque Couple court-circuité Drehmoment kurzgeschlossen Par cortocircuitado	Poli Poles Poles Pole Polos	Encoder	Cavo motore Motor Cable Câble du moteur Motor Kabel Cable para motor
Nm	Nm			m
200 40% ED 180 s/h	205	16	Endat Sincos SSI BISS	7
Freno - Brake - Frein - Bremse - Freno				
RTW180 [2x200Nm]				



		Funi - Ropes - Cables Seilen - Cables			Dimensioni - Dimensions Mesures - Abmessungen - Tamaños		
ØD	F	Ø	min - max	Pitch	A	B	C
mm	mm	mm	n°	mm	mm	mm	mm
120	80	6 - 6,5 - 8,1	2 - 6	12	617	204	66
160	110		2 - 10	10	626		81
210	80		2 - 6	12	617	272	66

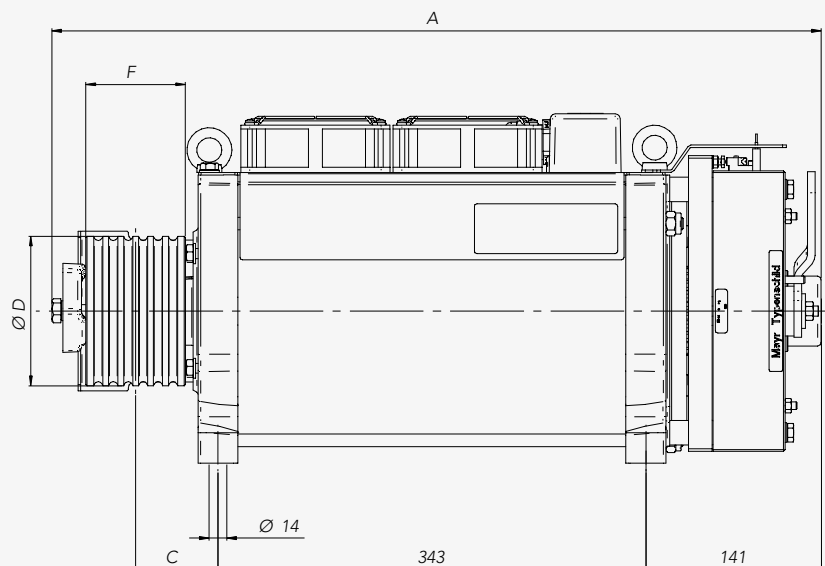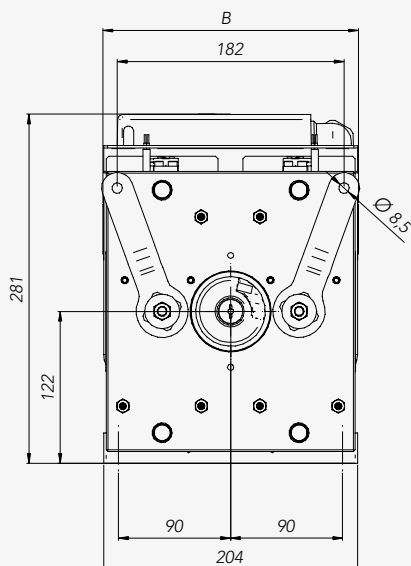

	Portata Load Charge Nutzlast Carga		Ø	Funi Ropes Cables Seilen Cables	Passo Pitch Pas RA Paso	Coppia Torque Couple Drehmoment Par de torsión	Potenza Power Puissances Leistungen Potencia	Giri RPM Tours Drehzahl RPM	Freq.	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinen Máquina	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinen Máquina
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A			***
1:1	250	0,15	210	8xØ6,5	10	188	0,3	13,6	1,8	9,4	MGS19221603B400	9,4	MGS19221603B400
		0,3	210	8xØ6,5	10	188	0,5	27,3	3,6	9,4	MGS19221603B400	9,4	MGS19221603B400
		0,63	210	8xØ6,5	10	188	1,1	57,3	7,6	9,4	MGS19221603B400	9,4	MGS19221603B400
		1	210	8xØ6,5	10	188	1,8	90,9	12,1	9,4	MGS19221603B400		
		1,6	210	8xØ6,5	10	188	2,9	145,5	19,4	9,4	MGS19221603B400		
	320	0,15	160	8xØ6,5	10	175	0,3	17,9	2,4	8,8	MGS19221603B400	8,8	MGS19221603B400
			210	8xØ6,5	10	230	0,3	13,6	1,8	12,0	MGS19221603B400	12,0	MGS19221603B400
		0,3	160	8xØ6,5	10	175	0,7	35,8	4,8	8,8	MGS19221603B400	8,8	MGS19221603B400
			210	8xØ6,5	10	230	0,6	27,3	3,6	12,0	MGS19221603B400	12,0	MGS19221603B400
		0,63	160	8xØ6,5	10	175	1,4	75,2	10,0	8,8	MGS19221603B400	8,8	MGS19221603B400
			210	8xØ6,5	10	230	1,2	57,3	7,6	12,0	MGS19221603B400	12,0	MGS19221603B400
		1	160	8xØ6,5	10	175	2,2	119,4	15,9	8,8	MGS19221603B400		
			210	8xØ6,5	10	230	1,9	90,9	12,1	12,0	MGS19221603B400		
		1,6	160	8xØ6,5	10	175	3,5	191,0	25,5	11,4	MGS19222393B400		
			210	8xØ6,5	10	230	3,0	145,5	19,4	12,0	MGS19221603B400		
	500	0,15	120	*	*	194	0,5	23,9	3,2	9,7	MGS19221603B400	9,7	MGS19221603B400
		0,3	120	*	*	194	1,0	47,7	6,4	9,7	MGS19221603B400	9,7	MGS19221603B400
		0,63	120	*	*	194	2,0	100,3	13,4	9,7	MGS19221603B400	12,6	MGS19222393B400
		1	120	*	*	194	3,2	159,2	21,2	9,7	MGS19221603B400		
		1,6	120	*	*	194	5,2	254,6	34,0	16,5	MGS19223203B400		
2:1	480	0,15	210	8xØ6,5	10	182	0,5	27,3	3,6	9,1	MGS19221603B400	9,1	MGS19221603B400
		0,3	210	8xØ6,5	10	182	1,0	54,6	7,3	9,1	MGS19221603B400	9,1	MGS19221603B400
		0,63	210	8xØ6,5	10	182	2,2	114,6	15,3	9,1	MGS19221603B400		
		1	210	8xØ6,5	10	182	3,5	181,9	24,3	11,8	MGS19222393B400		
		1,6	210	8xØ6,5	10	182	5,5	291,0	38,8	38,8	MGS19223203B400		
	750	0,15	120	*	*	151	0,8	47,7	6,4	7,5	MGS19221603B400	7,5	MGS19221603B400
			160	8xØ6,5	10	200	0,8	35,8	4,8	10,0	MGS19221603B400	10,0	MGS19221603B400
		0,3	120	*	*	151	1,5	95,5	12,7	7,5	MGS19221603B400	9,8	MGS19222393B400
			160	8xØ6,5	10	200	1,5	71,6	9,5	10,0	MGS19221603B400	10,0	MGS19221603B400
		0,63	120	*	*	151	3,2	200,5	26,7	9,8	MGS19222393B400		
			160	8xØ6,5	10	200	3,2	150,4	20,1	10,0	MGS19221603B400		
		1	120	*	*	151	5,0	318,3	42,4	12,8	MGS19223203B400		
			160	8xØ6,5	10	200	5,0	238,7	31,8	13,0	MGS19222393B400		
		1,6	120	*	*	151	8,0	509,3	67,9	18,1	MGS19225103B400		
			160	8xØ6,5	10	200	8,0	382,0	50,9	24,0	MGS19225103B400		
	1000	0,15	120	*	*	194	1,0	47,7	6,4	9,7	MGS19221603B400	9,7	MGS19221603B400
		0,3	120	*	*	194	1,9	95,5	12,7	9,7	MGS19221603B400	12,6	MGS19222393B400
		0,63	120	*	*	194	4,1	200,5	26,7	12,6	MGS19222393B400		
		1	120	*	*	194	6,5	318,3	42,4	16,5	MGS19223203B400		
		1,6	120	*	*	194	10,3	509,3	67,9	23,3	MGS19225103B400		

* Utilizzare funi speciali. Contattare il dipartimento commerciale Montanari per ulteriori informazioni.
 Special ropes must be used. Please contact Montanari Sales department for further indications.

***Disponibile anche 210/1ph - Available also 210/1ph