

ELECTRIC DIAGRAM FOR COLD SALADBARS


MODEL WITH TOP ILLUMINATING (WITH BROKEN LINE ROUTE)

SB-C - 120
SB-C (CP) - 155
SB-C - 155 - WT
SB-C (CP) - 220
SB-C - 220 - WT
BC-AK-T - 4 GN
BC-AK-T - 6 GN
F189BR

MODEL WITHOUT TOP ILLUMINATING (WITHOUT BROKEN LINE ROUTE)

BC - AK - 4 GN
BC - AK - 6 GN

Mastro GmbH
Hüserstrasse 53
59075 Hamm/Germany
VAT DE814055285

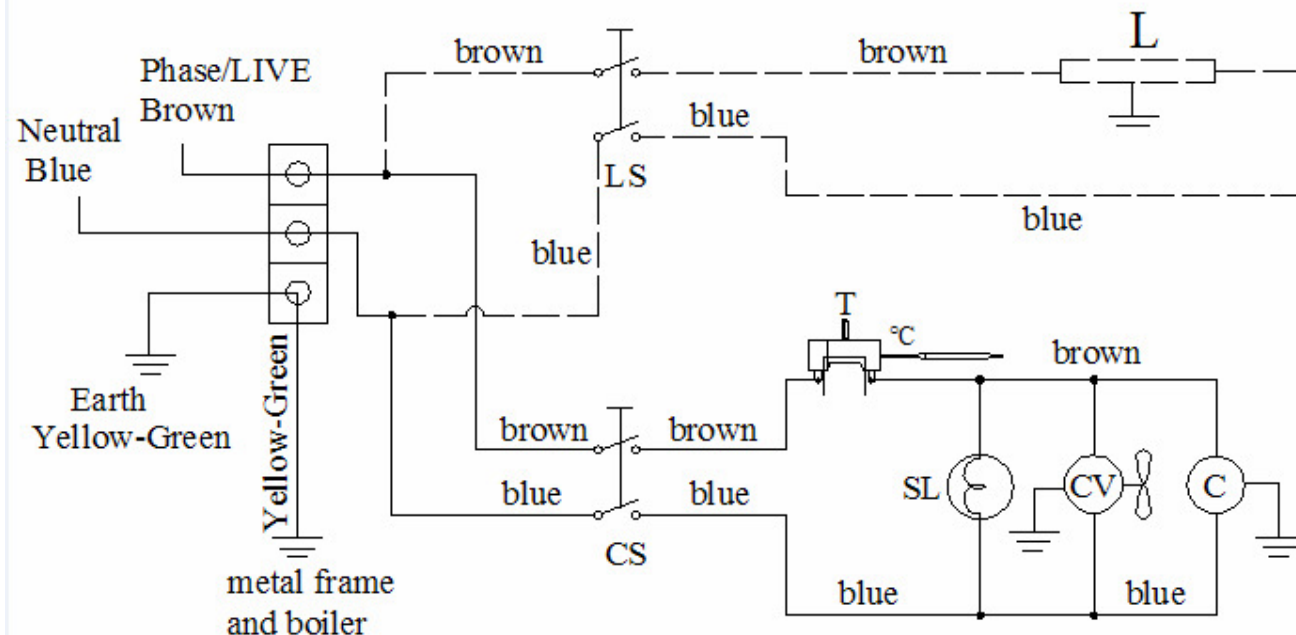

LS : LAMP SWITCH

L : LAMP

SB-C 120 = 14 W

SB-C 155 / 220 = 28 W

BC-AK-T-4/6GN = 28 W

T : THERMOSTAT

CS : COOLING SWITCH

CV : CONDENSER
VENTILATOR

C : COMPRESSOR

SL : SIGNAL LAMP

ING.ED-SBC-XX/BC-AK-XX