



Stainless Steel Tray



Waterproof(IP69k)



Rear Display

# FW500 SERIES

## Waterproof Scale

FW500 series offers a large stainless steel tray and IP69k waterproof design, which is perfectly protected from high pressure and high temperature washing. The scale is ideal for wet and hygienic circumstances such as fish market, food manufacturing and feeding facilities.



IP69k



^ Rear display

# CAS

# FW500 SERIES | Waterproof Scale



## SPECIFICATIONS

| Model                      | FW500-C                                                                                                            |      |       | FW500-E                                                          |      |       |
|----------------------------|--------------------------------------------------------------------------------------------------------------------|------|-------|------------------------------------------------------------------|------|-------|
| Capacity (kg)              | 3/6                                                                                                                | 6/15 | 15/30 | 3/6                                                              | 6/15 | 15/30 |
| Repeatability (g)          | 1/2                                                                                                                | 2/5  | 5/10  | 1/2                                                              | 2/5  | 5/10  |
| Resolution                 | 1/3,000 (Dual Interval)                                                                                            |      |       |                                                                  |      |       |
| Display Type               | LCD                                                                                                                |      |       | LED                                                              |      |       |
| Display                    | 5 digit (height 35mm)                                                                                              |      |       | 6 digit (height 19mm)                                            |      |       |
| Status                     | Stable, Zero, Tare, Unit(kg), BAT                                                                                  |      |       |                                                                  |      |       |
| Key                        | Zero, Tare, Hold, Power                                                                                            |      |       |                                                                  |      |       |
| Function                   | Hold, Auto power off                                                                                               |      |       |                                                                  |      |       |
| Power                      | Dry battery (D size 1.5V x 4ea)<br>12V/1.5A Adaptor                                                                |      |       | 6V Rechargeable battery<br>12V/1.5A Adaptor                      |      |       |
| Battery Life               | Manganese dry battery<br>: About 1,200 hours<br>Alkaline dry battery<br>: About 2,500 hours<br>*for single display |      |       | Rechargeable battery<br>: About 100 hours<br>*for single display |      |       |
| Operation Temperature (°C) | -10 ~ +40                                                                                                          |      |       |                                                                  |      |       |
| Tray Size (mm)             | 247(W) x 212(D)                                                                                                    |      |       |                                                                  |      |       |
| Dimension (mm)             | 266(W) x 303(D) x 109(H)                                                                                           |      |       |                                                                  |      |       |
| Product Weight (kg)        | 3.0                                                                                                                |      |       | 3.3                                                              |      |       |

## FEATURES

- IP69k (Waterproof)
- Large stainless steel tray
- Fast and accurate weighing operation (1/3,000 [Dual Interval])
- Auto power off
- Bright and large display
- Rear display

## OPTIONS

- AC adaptor ( Only FW500-C)
- Rear display

## IP69k waterproof design

IP69k to withstand high temperature, high pressure waterproof, therefore weighing in wet places is very stable.



## Large stainless steel tray

It is large enough to withstand materials and maintain hygienic condition, as well.



## High accuracy and fast operation

1/3,000 Dual interval and fast but stable display rate enhance your productivity.



## Economical and Convenient

Using long-lasting rechargeable battery and applying Auto power off functions, very efficient and easy to use.



# CAS

CAS BLDG., # 440-1, SUNGNAE-DONG,  
GANGDONG-GU, SEOUL, KOREA


TEL\_ 82 2 2225 3500

FAX\_ 82 2 475 4668

<http://www.globalcas.com>

Specifications are subject to change for improvement without prior notice.

## DIMENSIONS

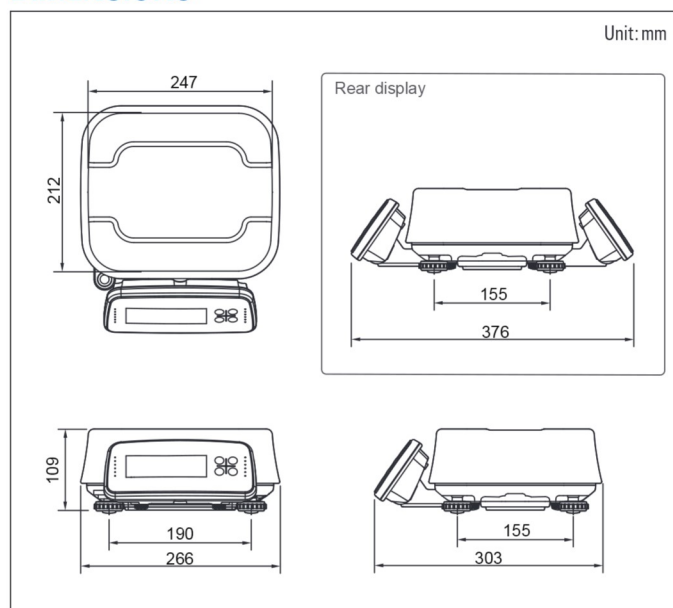

C-11303102