

VENTILAZIONE

Air density (γ): 1.20 kg/m³

Installation type "B": free inlet, ducted outlet

12000 m³/h fan test chamber according to AMCA 210/05 fig. 12


Inlet side free field Lp(A) measurements at 1 m according to ISO 3746:2011

Fan type: DAIN 7/7 XPL
Test nr.: 864
Date: 2015/03/06
Power supply[V]: 230 1~
Frequency [Hz]: 50

Motor code: MTR.4P.147.1V.IP55
Motor power [W]: 147
Motor poles: 4
Mot. prot. class: IP55
Mot. ins. class: F

Motor T.H.: YES IN
Capacitor [μ F]: 6.3
Fan max. abs. current [A]: 1.3

Fan ErP status: not subjected to ErP Regulation (Pin<280 W)

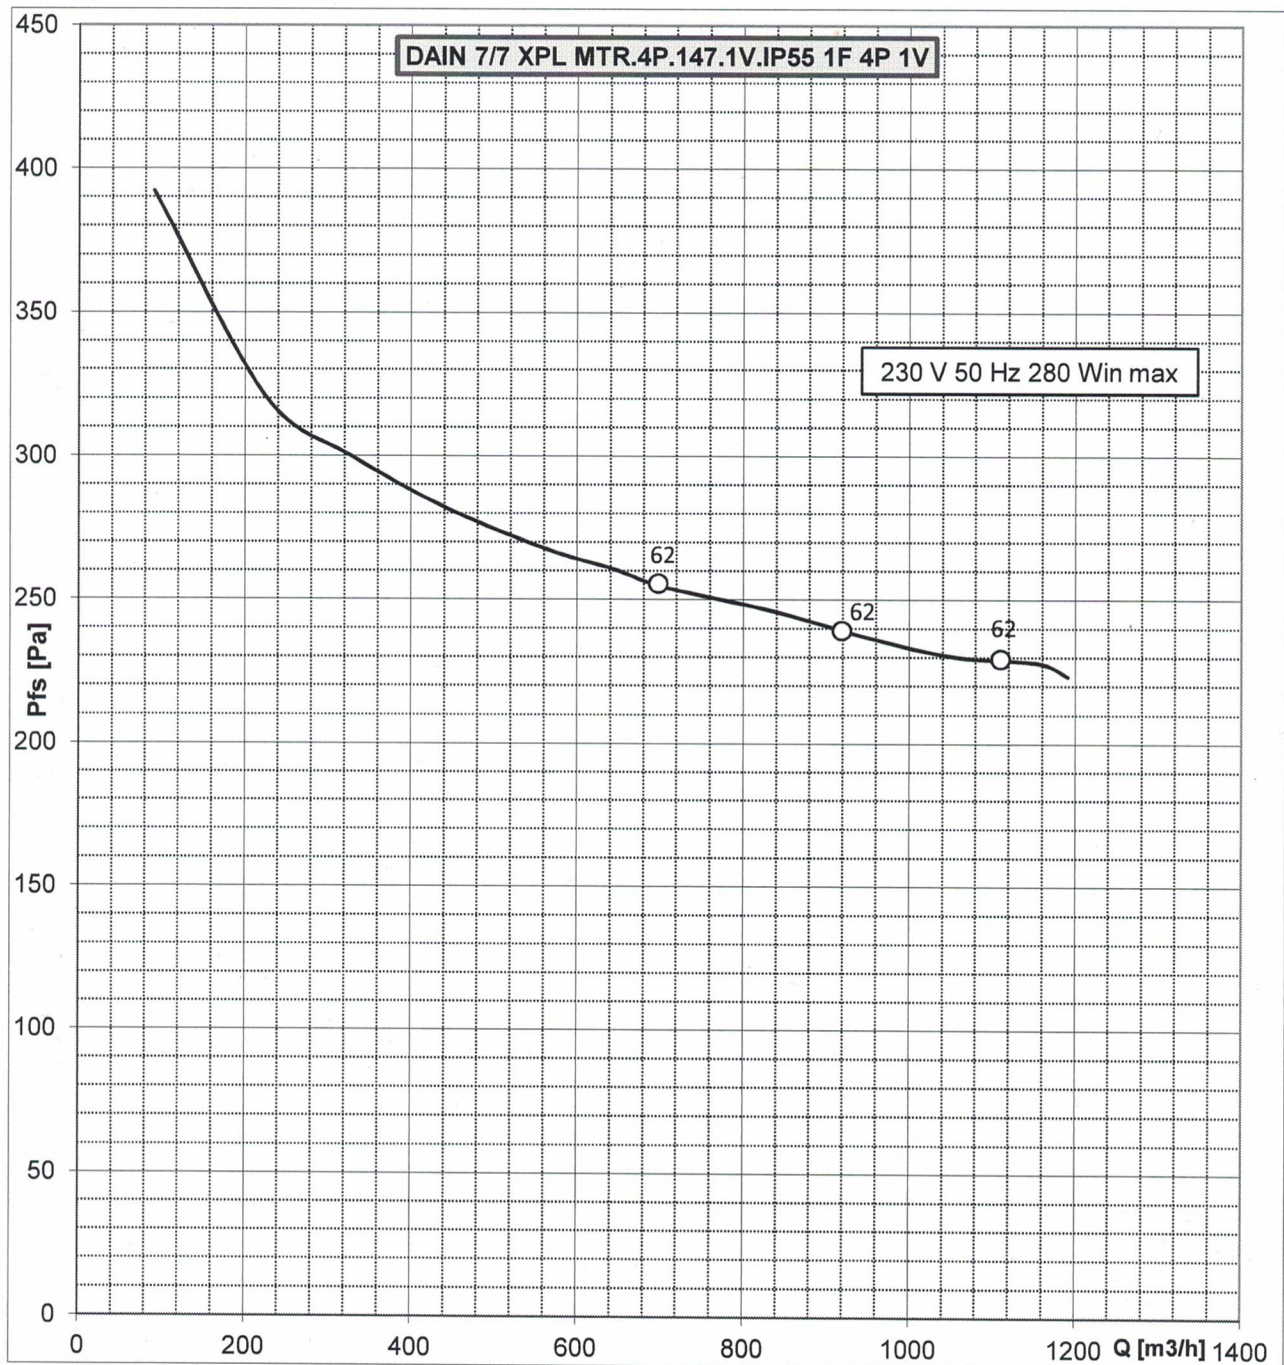

Data are not certified by AMCA