



Sigenergy focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

www.sigenergy.com

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.



SIGENERGY

Home Energy Solution

Let the world enjoy green energy

CONTENTS

Brand

About SIGENERGY

Product

Residential Solution

Product Portfolio

Trusted Partner

Intelligent Manufacturing

Solar-powered Manufacturing

Quality Assurance

Service Partner



ABOUT SIGENERGY

Sigenergy focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

VISION Enjoy Green Energy

MISSION

Be a distributed energy pioneer.

Build intelligent energy solutions with superior safety, ultra simplicity, and outstanding performance.

SIGEN

Safe **I**ntelligent **G**reen **E**fficient **N**ew

SIGENERGY HOME ENERGY SOLUTION

Combining solar, storage and EV charging, Sigenergy offers an all-in-one Home Energy Solution that helps you lower utility bill and reliance on the grid. Simple to install, easy to use, smart & safe all around, our system is versatile and scalable to meet every need.

Let numbers talk
Sigenergy is raising industry standards

15 mins

stackable installation

5 layers

battery protection

280 Ah

long cycle-life battery cell

0 ms

load-side disruption

5 mins

fast commissioning

5 layers

system protection

V2X

bi-directional charging

1-click

full system diagnosis



Simple



Versatile



Robust



Intelligent





► **Sigen Energy Controller**
for solar + energy storage system

► **Sigen EV DC Charging Module**
Ready for V2X

► **Sigen Battery**


8.0 **5.0**
Energy capacity(kWh)

1 – 6
batteries stackbale for per stack

5 kWh – 48 kWh
energy capacity range for per stack

Multiple
systems supported in parallel connection

5-in-One, highly integrated design

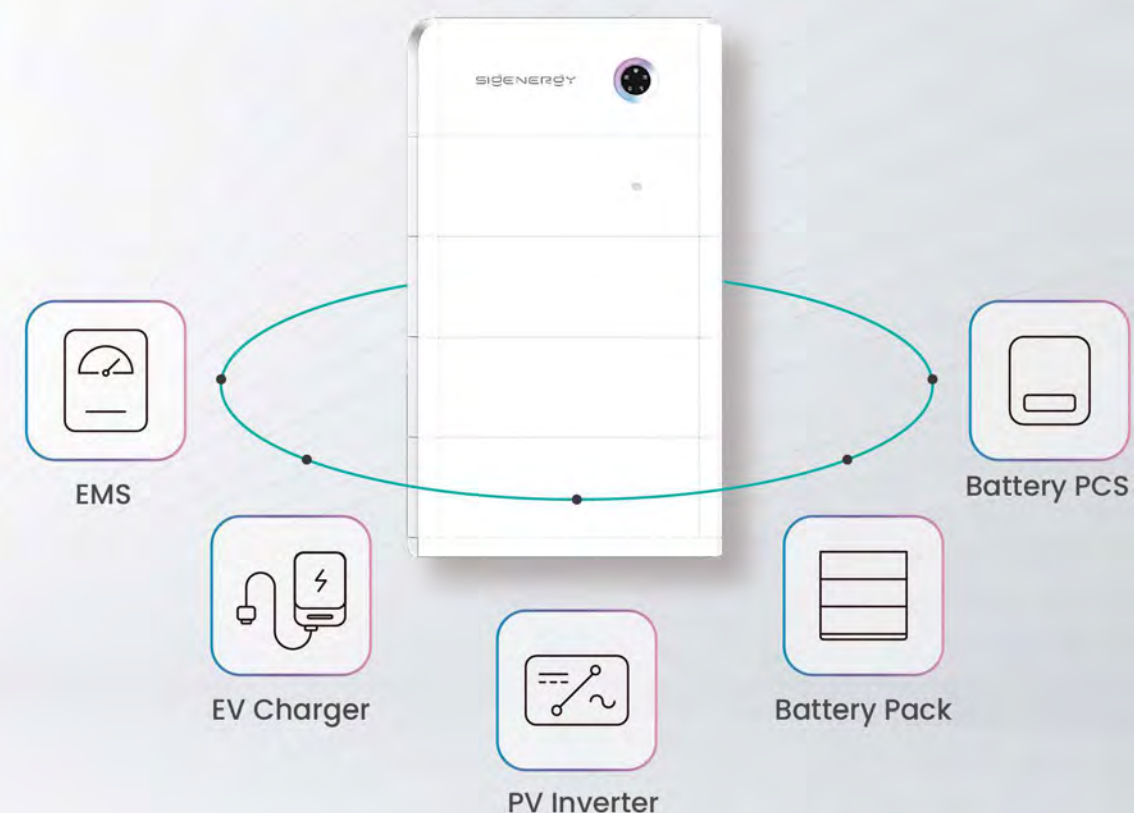

Sigenergy is leading a new way of producing, storing, transferring, and consuming home energy. We provide a genuine all-in-one solar energy storage system, SigenStor. Its unique 5-in-One modular design integrates Solar Inverter, EV DC Charger, Battery PCS, Battery Pack, and EMS into one intelligent home energy system. Simple, robust and versatile, it will be a great addition to your home.

Start small, grow on demand

Controller	x 1	x 1	x 1	x 1	x 1	x 1
Battery	x 1	x 2	x 3	x 4	x 5	x 6
Max. Total Energy Capacity	8 kWh	16 kWh	24 kWh	32 kWh	40 kWh	48 kWh



Sigen Energy Controller

3.0 – 6.0 kW Single Phase

5.0 – 25.0 kW Three Phase

- EMS inside for precise control
- DC ground-fault protection
- Multi-source black start
- On & off-grid compatibility
- DC/AC ratio up to 2 (single phase)
- IP66 system protection rating

Sigen Energy Controller 3.0–6.0 kW Single Phase

SigenStor EC	3.0 SP	3.6 SP	4.0 SP	4.6 SP	5.0 SP	6.0 SP	Units
DC Input (from PV)							
Max. PV power	6000	7360	8000	9200	10000	12000	W
Max. DC input voltage			600				V
Nominal DC input voltage			350				V
Start-up voltage			100				V
MPPT voltage range			50 ~ 550				V
Number of MPP. trackers			2				
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
AC Output (on-grid)							
Nominal output power	3000	3680	4000	4600	5000	6000	W
Max. output apparent power	3300	3680	4400	5000	5500	6600	VA
Nominal output current	13.6	16.0	18.2	20.9	22.7	27.3	A
Max. output current	15.0	16.0	20.0	22.7	25.0	30.0	A
Nominal output voltage			220 / 230 / 240				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDI < 2%				
Efficiency							
Max. efficiency			98.0%				
European efficiency	97.0%	97.1%	97.2%	97.3%	97.4%	97.4%	
AC Output (backup)							
Peak output power (10 seconds)	4500	5520	6000	6900	7500	9000	W
Nominal output voltage			220 / 230 / 240				V
Nominal output frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total voltage harmonic distortion			THDv < 2%				
Disruption time of backup switch ¹			0				ms
Battery Connection							
Battery module models			SigenStor BAT 5.0 / 8.0				
Number of modules per controller			1 ~ 6				pcs
Battery module voltage range			300 ~ 600				V
Protection							
Safety protection feature	DC ground fault protection, Arc fault circuit interrupter, DC reverse polarity protection, Anti-islanding protection, AC overcurrent/overvoltage/short-circuit protection, Insulation monitoring, Residual current monitoring, DC/AC surge protection						
General Data							
Dimensions (W / H / D)			700 / 300 / 245				mm
Weight			18				kg
Storage temperature range			-40 ~ 70				°C
Operating temperature range			-30 ~ 60				°C
Relative humidity range			0% ~ 95%				
Max. operating altitude			4000				m
Cooling			Natural convection				
System ingress protection rating			IP66				
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)						
Standard Compliance							
Standard ²	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2						

1.

This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.

2.

For all standards refer to the certificates category in the Sigenenergy website.

Sigen Energy Controller 5.0–25.0 kW Three Phase

SigenStor EC	5.0 TP	6.0 TP	8.0 TP	10.0 TP	12.0 TP	15.0 TP	17.0 TP	20.0 TP	25.0 TP	Units
DC Input (from PV)										
Max. PV power	8000	9600	12800	16000	19200	24000	27200	32000	40000	W
Max. DC input voltage					1100					V
Nominal DC input voltage					600					V
Start-up voltage					180					V
MPPT voltage range					160 ~ 1000					V
Number of MPP. trackers		2			3			4		
Number of PV strings per MPPT					1					
Max. input current per MPPT					16					A
Max. short-circuit current per MPPT					20					A
AC Output (on-grid)										
Nominal output power	5000	6000	8000	10000	12000	15000	17000	20000	25000	W
Max. output apparent power	5500	6600	8800	11000	13200	16500	18700	22000	27500	VA
Nominal output current	7.6	9.1	12.2	15.2	18.2	22.8	25.8	30.4	38.0	A
Max. output current	8.4	10.0	13.4	16.7	20.1	25.1	28.4	33.4	41.8	A
Nominal output voltage					380 / 400					V
Nominal grid frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total current harmonic distortion					THDi < 2%					
Efficiency										
Max. efficiency	98.1%	98.2%	98.3%	98.3%	98.3%	98.3%	98.3%	98.3%	98.3%	
European efficiency	96.1%	96.6%	97.1%	97.5%	97.7%	97.9%	97.9%	97.9%	98.0%	
AC Output (backup)										
Peak output power (10 seconds)	7500	9000	12000	15000	18000	22500	25500	30000	30000	W
Nominal output voltage					380 / 400					V
Nominal output frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total voltage harmonic distortion					THDv < 2%					
Disruption time of backup switch ¹					0					ms
Battery Connection										
Battery module models					SigenStor BAT 5.0 / 8.0					
Number of modules per controller					1 ~ 6					pcs
Battery module voltage range					600 ~ 900					V
Protection										
Safety protection feature	DC ground fault protection, Arc fault circuit interrupter, DC reverse polarity protection, Anti-islanding protection, AC overcurrent/overvoltage/short-circuit protection, Insulation monitoring, Residual current monitoring, DC/AC surge protection									
General Data										
Dimensions (W / H / D)					700 / 300 / 260					mm
Weight					36					kg
Storage temperature range					-40 ~ 70					°C
Operating temperature range					-30 ~ 60					°C
Relative humidity range					0% ~ 95%					
Max. operating altitude					4000					m
Cooling					Smart air cooling					
System ingress protection rating					IP66					
Communication					WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)					
Standard Compliance										
Standard ²	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1, IEC/EN 61000-6-2									

1.

This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.

2.

For all standards refer to the certificates category in the Sigenenergy website.



Sigen Battery

- Large cell capacity, low voltage & durable
- Multi-layer full battery safety protection
- Visible battery status on mySigen App
- Quick connectors for fast installation
- AI enablement, optimized battery cycle life
- Parallel connections for flexible battery mix

Sigen Battery 5.0 / 8.0 kWh

SigenStor BAT	5.0	8.0	Units
Performance Specification			
Battery type	LiFePO4		
Total energy capacity	5.38	8.06	kWh
Usable energy capacity ¹	5.2	7.8	kWh
Battery modules voltage range (single phase system)	300 ~ 600		V
Battery modules voltage range (three phase system)	600 ~ 900		V
Max. charge / discharge power	2500	4000	W
Peak charge / discharge power (10 seconds)	3750	6000	W
General Data			
Weight	55	70	kg
Dimensions (W / H / D)	767 / 270 / 260		mm
Storage temperature range	-25 ~ 60		°C
Operating temperature range	-20 ~ 55		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Natural convection		
System ingress protection rating	IP66		
Installation method	Floor standing / Wall-mounted		
Standard Compliance			
Standard	IEC/EN 60730-1, UN 38.3, IEC/EN 62619, IEC/EN 63056, IEC/EN 62040		

							
Number of battery modules ²	1	2	3	4	5	6	pcs
Total energy capacity	8.06	16.12	24.18	32.24	40.3	48.36	kWh
Max. charge / discharge power	4	8	12	16	20	24	kW
Total weight	112	183	254	325	396	467	kg
Total height (with base)	640	910	1180	1450	1720	1990	mm
Total width (with decorative covers)	850						mm
Total depth (with decorative covers)	260						mm

1. Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C, at the beginning of life.
2. The data in the table is based on the combination of SigenStor BAT 8.0 and SigenStor EC three-phase as an example, with a ground-mounted installation.



Sigen EV DC Charging Module

- V2H power supply, ample backup energy
- V2G power transfer, ready for energy trading
- EV-supported home energy system black start
- Max. 25 kW stable bi-directional charging
- 150V ~ 1000V charging, wide EV compatibility
- Charge EV with 100% solar power
- Track & schedule charging on mySigen App
- IP66 system protection, maintenance free

Sigen EV DC Charging Module 12 / 25 kW

Preliminary

SigenStor EVDC ¹	12	25	Units
DC Output			
Max. charging power	12.5	25	kW
Max. discharging power (V2H, V2G)	12.5	25	kW
Output voltage range	150 ~ 1000		V
Max. output current	40	80	A
Charging interfaces	CCS2		
Protection			
Short-circuit protection	Supported		
Over / Under voltage protection	Supported		
Overload protection	Supported		
Over temperature protection	Supported		
Reverse polarity protection	Supported		
Welded contactor check	Supported		
General Data			
Dimensions (W / H / D)	700 / 270 / 260		mm
Weight	40		kg
Storage temperature range	-40 ~ 70		°C
Operating temperature range	-30 ~ 60		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Smart air cooling		
System ingress protection rating	IP66		
Integrated charging cable length ²	5 / 7.5		m
Function			
Authentication	RFID card / Auto. charging (no authentication)		
Application	Bi-directional charging (V2H, V2G) Smart load management, Reservation		
User interfaces	LED indicator, App, RFID / NFC reader		
Remote function	OTA, Remote diagnosis		

1. Sigen EV DC Charging Module needs to be used together with Sigen Energy Controller.
2. Integrated charging cable length refers to the length of the cable that extends from the Sigen EV DC Charging Module, not the length of the exposed cable.



SIGENERGY



Sigen Hybrid Inverter

3.0 – 6.0kW Single Phase

5.0 – 25.0kW Three Phase

- Battery ready, future proof
- DC ground-fault protection
- DC/AC ratio up to 2 (single phase)
- Up to 4 MPP. trackers (three phase)
- IP66 protection rating

Sigen Hybrid Inverter 3.0–6.0 kW Single Phase

Sigen Hybrid	3.0 SP	3.6 SP	4.0 SP	4.6 SP	5.0 SP	6.0 SP	Units
DC Input							
Max. PV power	6000	7360	8000	9200	10000	12000	W
Max. DC input voltage			600				V
Nominal DC input voltage			350				V
Start-up voltage			100				V
MPPT voltage range			50 ~ 550				V
Number of MPP. trackers			2				
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
AC Output (on-grid)							
Nominal output power	3000	3680	4000	4600	5000	6000	W
Max. output apparent power	3300	3680	4400	5000	5500	6600	VA
Nominal output current	13.6	16.0	18.2	20.9	22.7	27.3	A
Max. output current	15.0	16.0	20.0	22.7	25.0	30.0	A
Nominal output voltage			220 / 230 / 240				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
Efficiency							
Max. efficiency			98.0%				
European efficiency	97.0%	97.1%	97.2%	97.3%	97.4%	97.4%	
Additional Features							
Compatible battery module			SigenStor BAT 5.0 / 8.0				
Number of modules per controller			1 ~ 6				pcs
Battery module voltage range			300 ~ 600				V
Peak output power (10 seconds)	4500	5520	6000	6900	7500	9000	W
Nominal output voltage			220 / 230 / 240				V
Protection							
Safety protection feature	DC ground fault protection, Arc fault circuit interrupter, DC reverse polarity protection, Anti-islanding protection, AC overcurrent/overvoltage/short-circuit protection, Insulation monitoring, Residual current monitoring, DC/AC surge protection						
General Data							
Dimensions (W / H / D)			700 / 300 / 268				mm
Weight			18				kg
Storage temperature range			-40 ~ 70				°C
Operating temperature range			-30 ~ 60				°C
Relative humidity range			0% ~ 95%				
Max. operating altitude			4000				m
Cooling			Natural convection				
Ingress protection rating			IP66				
Installation method			Wall-mounted				
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)						
Standard Compliance							
Standard ¹	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2						

¹ For all standards refer to the certificates category in the Sigenergy website.

Sigen Hybrid Inverter 5.0–25.0 kW Three Phase

Sigen Hybrid	5.0 TP	6.0 TP	8.0 TP	10.0 TP	12.0 TP	15.0 TP	17.0 TP	20.0 TP	25.0 TP	Units
DC Input										
Max. PV power	8000	9600	12800	16000	19200	24000	27200	32000	40000	W
Max. DC input voltage					1100					V
Nominal DC input voltage					600					V
Start-up voltage					180					V
MPPT voltage range					160 ~ 1000					V
Number of MPP. trackers		2			3			4		
Number of PV strings per MPPT					1					
Max. input current per MPPT					16					A
Max. short-circuit current per MPPT					20					A
AC Output (on-grid)										
Nominal output power	5000	6000	8000	10000	12000	15000	17000	20000	25000	W
Max. output apparent power	5500	6600	8800	11000	13200	16500	18700	22000	27500	VA
Nominal output current	7.6	9.1	12.2	15.2	18.2	22.8	25.8	30.4	38.0	A
Max. output current	8.4	10.0	13.4	16.7	20.1	25.1	28.4	33.4	41.8	A
Nominal output voltage					380 / 400					V
Nominal grid frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total current harmonic distortion					THDi < 2%					
Efficiency										
Max. efficiency	98.1%	98.2%	98.3%	98.3%	98.3%	98.3%	98.3%	98.3%	98.3%	
European efficiency	96.1%	96.6%	97.1%	97.5%	97.7%	97.9%	97.9%	97.9%	98.0%	
Additional Features										
Compatible battery module					SigenStor BAT 5.0 / 8.0					
Number of modules per controller					1 ~ 6					pcs
Battery module voltage range					600 ~ 900					V
Peak output power (10 seconds)	7500	9000	12000	15000	18000	22500	25500	30000	30000	W
Nominal output voltage					380 / 400					V
Protection										
Safety protection feature					DC ground fault protection, Arc fault circuit interrupter, DC reverse polarity protection, Anti-islanding protection, AC overcurrent/overvoltage/short-circuit protection, Insulation monitoring, Residual current monitoring, DC/AC surge protection					
General Data										
Dimensions (W / H / D)					700 / 300 / 283					mm
Weight					36					kg
Storage temperature range					-40 ~ 70					°C
Operating temperature range					-30 ~ 60					°C
Relative humidity range					0% ~ 95%					
Max. operating altitude					4000					m
Cooling					Smart air cooling					
Ingress protection rating					IP66					
Installation method					Wall-mounted					
Communication					WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)					
General Data										
Standard ¹					IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1, IEC/EN 61000-6-2					

¹ For all standards refer to the certificates category in the Sigenergy website.



Sigen PV Inverter

3.0 – 6.0 kW Single Phase

5.0 – 25.0 kW Three Phase



- Easy installation with side cabling
- Visible energy tracking on mySigen App
- WLAN, Ethernet & 4G communication
- DC/AC ratio up to 2 (single phase)
- Up to 4 MPP. trackers (three phase)
- IP66 protection rating

Sigen PV Inverter 3.0–6.0 kW Single Phase

Sigen PV Max	3.0 SP	3.6 SP	4.0 SP	4.6 SP	5.0 SP	6.0 SP	Units
DC Input							
Max. PV power	6000	7360	8000	9200	10000	12000	W
Max. DC input voltage			600				V
Nominal DC input voltage			350				V
Start-up voltage			100				V
MPPT voltage range			50 ~ 550				V
Number of MPP. trackers			2				
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
AC Output							
Nominal output power	3000	3680	4000	4600	5000	6000	W
Max. output apparent power	3300	3680	4400	5000	5500	6600	VA
Nominal output current	13.6	16.0	18.2	20.9	22.7	27.3	A
Max. output current	15.0	16.0	20.0	22.7	25.0	30.0	A
Nominal output voltage			220 / 230 / 240				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
Efficiency							
Max. efficiency			98.0%				
European efficiency	97.0%	97.1%	97.2%	97.3%	97.4%	97.4%	
Protection							
Safety protection feature	DC ground fault protection, Arc fault circuit interrupter, DC reverse polarity protection, Anti-islanding protection, AC overcurrent/overvoltage/short-circuit protection, Insulation monitoring, Residual current monitoring, DC/AC surge protection						
General Data							
Dimensions (W / H / D)	700 / 300 / 268						mm
Weight	18						kg
Storage temperature range	-40 ~ 70						°C
Operating temperature range	-30 ~ 60						°C
Relative humidity range	0% ~ 95%						
Max. operating altitude	4000						m
Cooling	Natural convection						
Ingress protection rating	IP66						
Installation method	Wall-mounted						
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)						
Standard Compliance							
Standard ¹	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2						

¹ For all standards refer to the certificates category in the Sigenergy website.

Sigen PV Inverter 5.0–25.0 kW Three Phase

Sigen PV Max	5.0 TP	6.0 TP	8.0 TP	10.0 TP	12.0 TP	15.0 TP	17.0 TP	20.0 TP	25.0 TP	Units
DC Input										
Max. PV power	8000	9600	12800	16000	19200	24000	27200	32000	40000	W
Max. DC input voltage					1100					V
Nominal DC input voltage					600					V
Start-up voltage					180					V
MPPT voltage range					160 ~ 1000					V
Number of MPP. trackers	2				3		4			
Number of PV strings per MPPT					1					
Max. input current per MPPT					16					A
Max. short-circuit current per MPPT					20					A
AC Output										
Nominal output power	5000	6000	8000	10000	12000	15000	17000	20000	25000	W
Max. output apparent power	5500	6600	8800	11000	13200	16500	18700	22000	27500	VA
Nominal output current	7.6	9.1	12.2	15.2	18.2	22.8	25.8	30.4	38.0	A
Max. output current	8.4	10.0	13.4	16.7	20.1	25.1	28.4	33.4	41.8	A
Nominal output voltage					380 / 400					V
Nominal grid frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total current harmonic distortion					THDi < 2%					
Efficiency										
Max. efficiency	98.1%	98.2%	98.3%	98.3%	98.3%	98.3%	98.3%	98.3%	98.3%	
European efficiency	96.1%	96.6%	97.1%	97.5%	97.7%	97.9%	97.9%	97.9%	98.0%	
Protection										
Safety protection feature	DC ground fault protection, Arc fault circuit interrupter, DC reverse polarity protection, Anti-islanding protection, AC overcurrent/overvoltage/short-circuit protection, Insulation monitoring, Residual current monitoring, DC/AC surge protection									
General Data										
Dimensions (W / H / D)					700 / 300 / 283					mm
Weight					36					kg
Storage temperature range					-40 ~ 70					°C
Operating temperature range					-30 ~ 60					°C
Relative humidity range					0% ~ 95%					
Max. operating altitude					4000					m
Cooling					Smart air cooling					
Ingress protection rating					IP66					
Installation method					Wall-mounted					
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)									
Standard Compliance										
Standard ¹	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1, IEC/EN 61000-6-2									

¹ For all standards refer to the certificates category in the Sigenergy website.

Sigen Energy Gateway

- Multiple breaker positions reserved for SigenStor or other loads
- Seamless switch to backup mode, worry-free energy usage
- Ready for generator, heat pump or other controllable loads
- Support both whole home backup & partial home backup
- 350 ms reverse power flow protection of grid & generator
- Uninterrupted power supply through PV+ESS/grid/generator



Sigen Energy Gateway HomeMax Single / Three Phase

Preliminary

Sigen Gateway	HomeMax SP	HomeMax TP	Units
Grid Connection			
Grid connection type	Single phase	Three phase	
Nominal AC input / output voltage	220 / 230 / 240	380 / 400	V
Nominal AC input / output current	100	76	A
Nominal AC input / output power	22 / 23 / 24	50 / 52.6	kW
Nominal AC frequency	50 / 60		Hz
Disruption time of backup switch ¹	0		ms
AC Output to Backup Port			
Nominal AC output voltage	220 / 230 / 240	380 / 400	V
Nominal AC output current	100	76	A
Nominal AC output power	22 / 23 / 24	50 / 52.6	kW
Nominal AC frequency	50 / 60		Hz
Overvoltage category	III		
Inverter Connection / EV Charger Port (optional)			
Max. number of connection	3	2	
Nominal AC voltage	220 / 230 / 240	380 / 400	V
Nominal AC input current	32	38	A
Compatible EV charger power	7	11 / 22	kW
EV charging mode	Solar boost charging, time-based charging, load balancing		
Smart Port Connection			
Generator output voltage	220 / 230 / 240	380 / 400	
Nominal input / output current	63	76	A
Nominal AC input / output power	13.8 / 14.5 / 15.1	50 / 52.6	kW
Generator 2-wire start	Supported		
General Data			
Dimensions (W / H / D)	455 / 660 / 179	510 / 750 / 179	mm
Weight	19	23	kg
Storage temperature range	-40 ~ 70		
Operating temperature range	-30 ~ 55		
Relative humidity range	0% ~ 95%		
Max. operation altitude	4000		
Cooling	Natural convection		
Ingress protection rating	IP54		
Communication	Fast Ethernet, RS485, dry contact		
Installation method	Wall mounted		

1. This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.



Sigen Communication Module

- IP66 protection rating, more reliable
- Plug & play, easy to use
- Support 2G / 3G / 4G communication

Sigen Communication Module

	Sigen CommMod	Units
Connection interface	USB	
Installation type	Plug-and-play	
Display	LED indicators	
Dimensions (W / H / D)	52 / 112 / 33	mm
Weight	90	g
Ingress protection rating	IP66	
Power consumption (typical)	< 4	W
Supported standards	4G: FDD-LTE / TDD-LTE 3G: WCDMA / HSDPA / HSUPA / HSPA+ 2G: GSM / GPRS / EDGE3	
Storage temperature range	-40 ~ 70	°C
Operating temperature range	-30 ~ 60	°C
Relative humidity range	0% ~ 95%	
Max. operating altitude	4000	m
Controller / Inverter compatibility	Sigen Energy Controller series Sigen Hybrid Inverter series Sigen PV Inverter series	





Sigen Power Sensor

- 1% high-accuracy power detection for precise control
- LCD real-time info display, easy to operate and check
- Integrates smoothly with Sigenergy devices, no need for setup
- Top class 100 A direct connection in power sensor with built-in CT
- Support export/import limitations and ready for AI evolving
- 100 ms data refresh rate, instantaneous data feed

Sigen Power Sensor

Sigen Sensor ¹	SP-DH	SP-CT120-DH	TP-DH	TP-CT120-DH	Units
Power Supply					
Grid connection type	1P2W		3P3W/3P4W		
AC input voltage range	176 ~ 276		173 ~ 480		Vac
Nominal AC frequency	50 / 60				Hz
Max. operating current	100	-	100	-	A
Measurement Accuracy					
Voltage accuracy	0.5%				
Current accuracy	0.5%				
Power accuracy	1%				
Frequency accuracy	0.2%				
Communication					
Interface	RS485				
Baud rate	9600				bps
Protocol	Modbus RTU				
General Data					
Dimensions (W / H / D)	36 / 100 / 63	18 / 118 / 64	72 / 100 / 66	72 / 94.5 / 65	mm
Weight	0.20	0.07	0.32	0.20	kg
Storage temperature range	-40 ~ 85				°C
Operating temperature range	-30 ~ 60				°C
Relative humidity range	0% ~ 90%				
Ingress protection rating	IP51				
Installation method	DIN Rail 35 mm				
CT Accessory					
Number of CT	-	1	-	3	pcs
Cable length of CT	-	1	-	1	m
Inner diameter of CT	-	16	-	16	mm
Weight of CT	-	0.09	-	0.09	kg
Max. operating current of CT	-	120	-	120	A
Standard Compliance					
Standard	EN 61010-1:2010, EN 61010-2-030:2010				

1. For more models refer to the Sigenergy website.

Sigen EV AC Charger



- Green power charging with Sigenenergy home energy solution
- Data tracking & scheduled charging on mySigen App
- Dynamic load management to prevent overload, user-friendly charging*
- Easy installation with less steps and top/bottom entry option
- Integrated residual current failure protection reduces installation costs
- IP65 and wall/pole-mounted installation provide high adaptability

* Only works with Sigenenergy home energy solution or additional Sigen Power Sensor

Sigen EV AC Charger 7 / 11 / 22 kW


Sigen EVAC	7	11	22	Units
AC Input & Output				
Nominal charging power	7	11	22	kW
Nominal output voltage	1P/N/PE, 220 ~ 240	3P/N/PE, 220 ~ 240 / 380 ~ 415	3P/N/PE, 220 ~ 240 / 380 ~ 415	V
Output current range	6 ~ 32	6 ~ 16	6 ~ 32	A
Nominal AC frequency		50 / 60		Hz
Vehicle connection	Type 1 connector / Type 2 connector / Type 2 socket with shutters			
AC input cable width range		2.5 ~ 6.0		mm ²
Protection				
Integrated DC fault detection ¹		6		mA
Integrated AC fault detection ¹		30		mA
Flame retardant rating		UL94-5VB		
Over / Under voltage protection		Supported		
Overload protection		Supported		
Over temperature protection		Supported		
PEN protection		Supported		
TIC electricity linky meter interface		Supported		
Randomized charging delay		Supported		
Ground fault protection		Supported		
Surge protection		Supported		
Grounding system		TT, TN, IT		
User Interface & Communication				
Protocol		Modbus TCP		
Communication		4G / WLAN / Fast Ethernet		
Authentication		RFID card / App / Auto-charge (no authentication)		
Display		LED indicator / App		
Charging mode		Standard charging / Scheduled charging / Solar boost charging		
Metering		External meter with RS485 / Integrated metering IC		
Dynamic load management		Supported		
Phase switching		Supported		
General Data				
Dimensions (W / H / D)		234 / 384 / 126		mm
Weight (case B / case C)		4.5 / 6.4		kg
Storage temperature range		-40 ~ 70		°C
Operating temperature range		-30 ~ 55		°C
Relative humidity range		5% ~ 95%		
Max. operating altitude		4000		m
Cooling		Natural convection		
Ingress protection rating		IP65		
Installation method		Wall-mounted		
Application environment		Outdoor / Indoor		
Standby self-consumption		< 3.6		W
Standard charging cable length		5		m
Standard Compliance				
Standard ²	EN IEC 61851-1, IEC 62995, EN IEC 61851-21-2, ETSI EN 300 330 V2.1.1, ETSI EN 301 511 V12.5.1, EN IEC 62311, EN50665, ETSI EN 300 328 V2.2.2			

1. Residual direct current protective device (RDC-PD) with integrated AC pulsating DC and 6mA DC detection, evaluation and mechanical switching in the Sigen EV AC Charger is tested according to IEC 62955.
2. For all standards refer to the certificates category in the Sigenenergy website.

mySigen App

Intelligent energy management within touches
For homeowners

Smarter energy life empowered by mySigen App

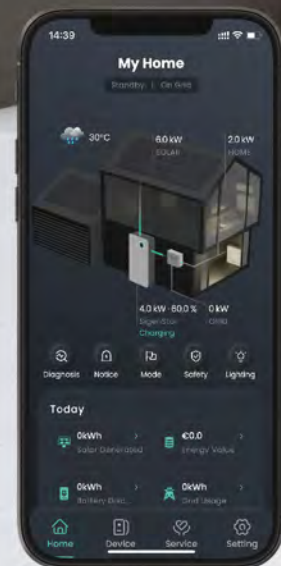

Real-time monitoring

Energy data refresh every 10 seconds
Visible energy flow & related devices
Auto. system network display on App



AI Mode

Provide intelligent optimization suggestions on system mode, battery capacity and energy usage




Sigen Shield

Discover industry-leading battery safety features



Fun ambient lighting

Customizable lighting language
Add personality to your system

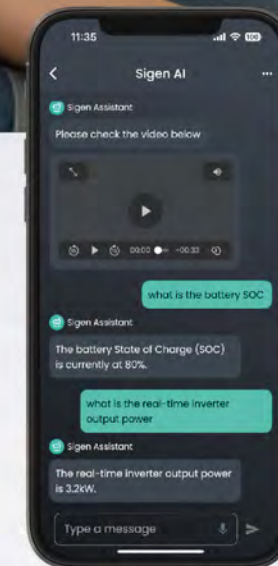

Sigen AI

After-sales engineer
Home energy analyst
Device mgmt. assistant



Interactive services

AI-integrated service interface
Self-diagnosis to identify problems
Submit service requests via the App

mySigen App


Intelligent energy management within touches
For installers

Simplify your installation process, one App does it all



Step 1

Scan to add a new system

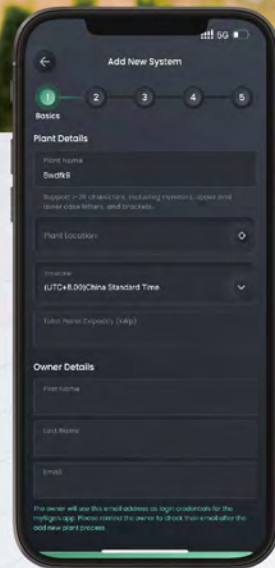


Step 2

Fill out details




Step 3

Fast software upgrade

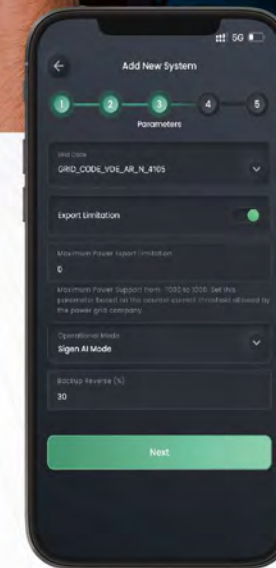


Step 4

Confirm preset parameters

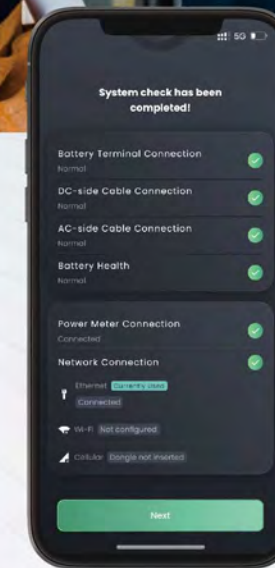

Step 5

One-click full system check

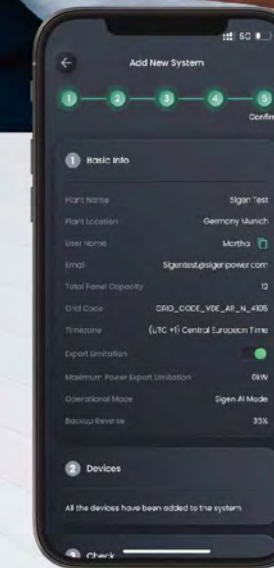

Step 6

Confirm

Leading the Way in Intelligent Manufacturing



6 GWh

Battery production capacity

12 GW

Inverter production capacity

Located in the Lin-gang New Area, Shanghai, a hub of world-class enterprises with strong innovative strengths, the 20,000 sqm manufacturing center is equipped with state-of-the-art technology and innovative manufacturing processes that allow us to produce high-quality products with exceptional efficiency. It also features the latest manufacturing execution system (MES) which streamlines our operations and enables real-time monitoring of the production process.





Runs on Solar by Sigenergy solutions for a Sustainable Tomorrow

By adopting Sigenergy products and embracing solar energy, our factory has realized green manufacturing. With a 3,000 sqm PV plant on the rooftop, We have significantly reduced our reliance on fossil fuels and effectively cut carbon footprint during the manufacturing process. Our solar-powered production also translates into better efficiency and higher cost savings for our business. We are proud to be making a positive impact on the environment, and are committed to continuing to lead our sustainability practices to help build a better world for future generations.

Plant Size

📏 3,000 m² ⚡ 362 kW_p ⏻ 240 kW_{ac} 📄 432 kWh

Estimated Annual Generation

📄 398,200 kWh

Community Contribution per Year

☁️ 309t CO₂ emission reduced
🌳 269 equivalent of trees planted




Manufacturing Execution System (MES)

Quality and efficiency is consistently guaranteed by our MES system, which monitors, tracks, documents, and controls the entire manufacturing process from raw materials to finished products, as well as full product lifecycle management.

Where Quality Meets Perfection

At Sigenergy, our unwavering commitment to putting the customer first is at the core of everything we do. We firmly believe that delivering top-quality products is paramount to ensuring customer satisfaction and building long-term relationships. With a relentless pursuit of excellence, we constantly strive to develop innovative products that meet and exceed customer expectations. Our strict implementation of rigorous quality control guarantees that every product leaving our factories is of the highest standard. Moreover, we never settle for complacency; Instead, we embrace a culture of continuous improvement to constantly enhance our products and surpass industry standards.

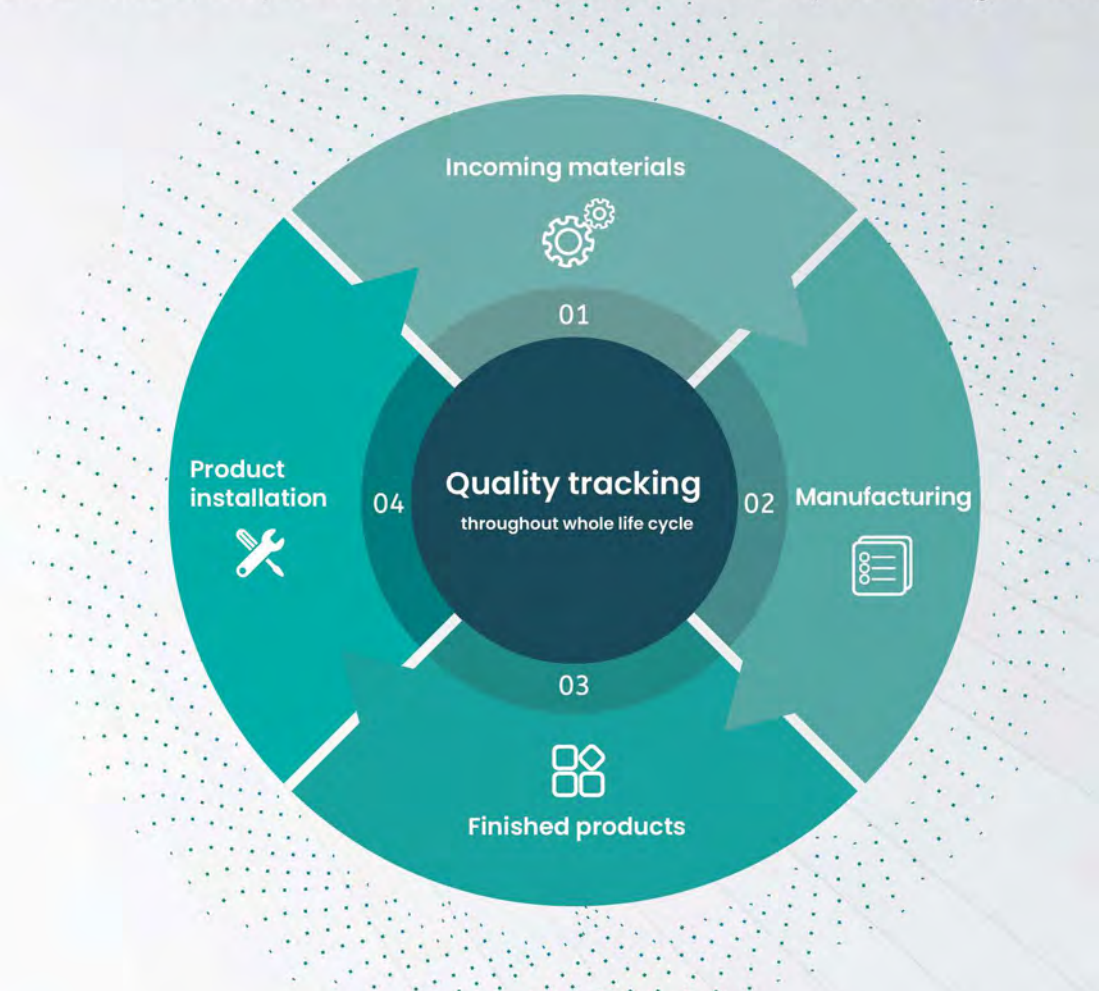

Join Us Achieve Together

As service partners, you can enjoy



More Credibility

As an official service partner, you may get more access to financial support, as well as helping your customers qualify for government rebates.

Training & Certification

We offer continuous technical training to prepare you and uplift your skills. You can earn more customer trust by getting certified.

Recognition & Rewards

The higher customer satisfaction rating you get, the more prizes and financial rewards you'll receive.

Operations Care

Whatever you need, your business gets priority support from us. Large premium partners also receive spare parts without up-front payment.

Simplified Process

Whether for installation or service, our one-stop mobile App will assist you all the way to ensure a quick and smooth experience.

Exclusive Promotion

As a certified service partner, your business potential is maximized by our priority recommendation to your local customers.

