


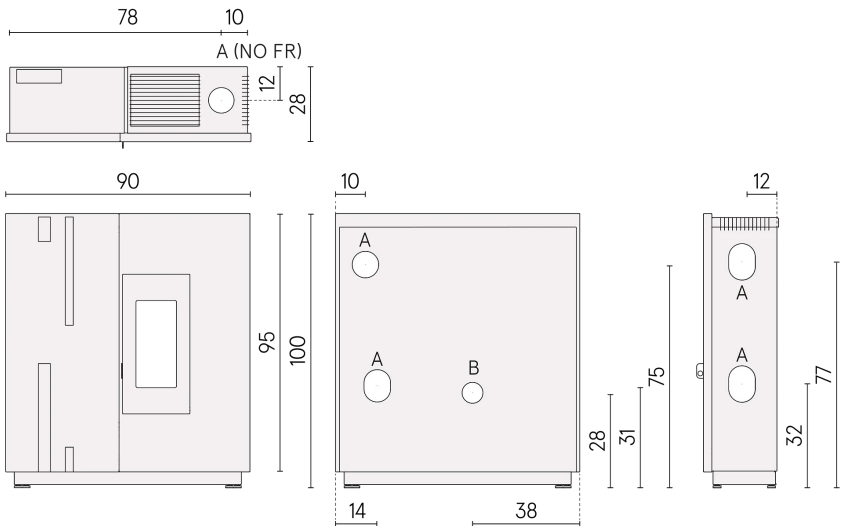

Pellet Air

TECHNICAL DATA

|                                                     |        |              |
|-----------------------------------------------------|--------|--------------|
| Thermic Power (at min-at max)                       | kW     | 2,5 - 6,9    |
| Introduced thermal power (at max)                   | kW     | 7,8          |
| Water useful power (at min-at max)                  | kW     | - - -        |
| Seasonal energy efficiency                          | ηs [%] | 85           |
| Useful efficiency (at min-at max)                   | %      | 90 - 89      |
| Heatable volume (at min-at max)                     | m³     | 71 - 197     |
| CO <sub>2</sub> (min-max)                           | %      | 6,4 - 12,0   |
| Emissions CO (13% O <sub>2</sub> ) (at min-at max)  | mg/Nm³ | 295 - 125    |
| Emissions OGC (13%O <sub>2</sub> ) (at min-at max)  | mg/Nm³ | 2 - 2        |
| Emissions NOX (13% O <sub>2</sub> ) (at min-at max) | mg/Nm³ | 110 - 99     |
| Dust content at 13% O <sub>2</sub> (at min-at max)  | mg/Nm³ | 15 - 15      |
| Fuel Pellet                                         | mm     | Ø 6 L=3÷40   |
| Hopper capacity                                     | kg     | 32           |
| Hourly consumption (at min-at max)                  | kg/h   | 0,6 - 1,6    |
| Autonomy (at min-at max)                            | h      | 53 - 20      |
| Supply and frequency                                | V-Hz   | 230-50       |
| Ignition electrical absorption                      | W      | 374          |
| Operating electrical absorption (at max)            | W      | 67           |
| Chimney flue depression (at min-at max)             | Pa     | 9 - 12       |
| Mass of smoke (at min-at max)                       | g/sec  | 3,0 - 4,6    |
| Exhaust fumes temperature (at min-at max)           | °C     | 109 - 177    |
| Distance from material comb. (back/side/under)      | mm     | 40 / 250 / 0 |
| Distance to material comb. (front/top)              | mm     | 600 / 750    |
| Exhaust fumes outlet (A)                            | Ø mm   | 80           |
| Combustion air inlet (B)                            | Ø mm   | 60           |
| Ducting outlet (C)                                  | Ø mm   | 0            |
| Ductable up to                                      | m      | 0            |

PLUS

|                                       |                                 |                       |
|---------------------------------------|---------------------------------|-----------------------|
| 5 stars D.M. 186                      | Upper, back and lateral exhaust | Cast iron door        |
| Remote control (optional)             | Sealed Chamber                  | Cast iron burning pot |
| Connection to the external thermostat | Comfort mode - Maximum silence  |                       |

AVAILABLE FINISHES

|         |                |                   |
|---------|----------------|-------------------|
| 7025091 | Steel Black    | EAN 8053859022015 |
| 7025092 | Steel Titanium | EAN 8053859022022 |

OPTIONAL

|         |                                |                   |
|---------|--------------------------------|-------------------|
| 5020001 | 90° curve kit smoke            | EAN 8053859012474 |
| 5024010 | Remote control with thermostat | EAN 8053859020943 |
| 5025001 | Black feet                     | EAN 8053859022213 |

CERTIFICATIONS

European standards  
Art. 15A B-VG 2015  
BlmSchV 2015  
Regensburg  
München  
Stuttgart  
Aachen

EN 16510-1:2022/  
EN 16510-2-6:2022

CE

OK BSC

ECO DESIGN 2022

CSTB

D.M. 186 \*\*\*\*\*

7★

A+

STOVE PACKAGE

|                   |        |        |
|-------------------|--------|--------|
| L (cm)            | H (cm) | P (cm) |
| 80                | 117    | 103    |
| Volume (m³)       | 0,96   |        |
| Gross weight (kg) | 87     |        |
| Net weight (kg)   | 75     |        |

STORAGE

|          |
|----------|
| N° (max) |
| 1        |

TRANSPORT

|       |
|-------|
| 39 pz |
|-------|