

INSULATED



INSULATED TOOLS



Anti Electro-Shock
Meets all requirements of THE VDE STANDARD
RELEVANT INTERNATIONAL STANDARDS. (IEC 60900)

Safety




INS

Insulated Torque Wrench Slip Type



Dimensions

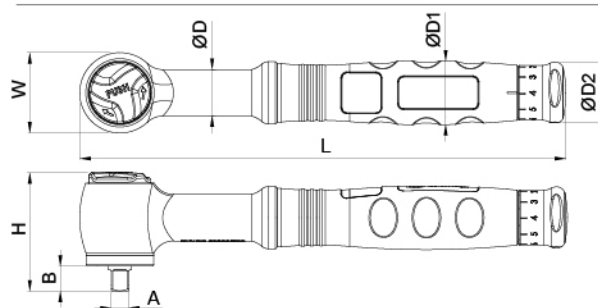

Specification

Accuracy : CW: $\pm 6\%$ / CCW: $\pm 6\%$

ITEM NO.	 A	Range		W	H	B	L	ØD	ØD1	ØD2		Packing
INS-25N	3/8"	5-25 Nm	0.05 Nm	44.7	65.7	11.6	266	25.6	35	33.9	695	12pcs/CTN


Unit : mm

INS2

Insulated Torque Wrench Click Type



Dimensions

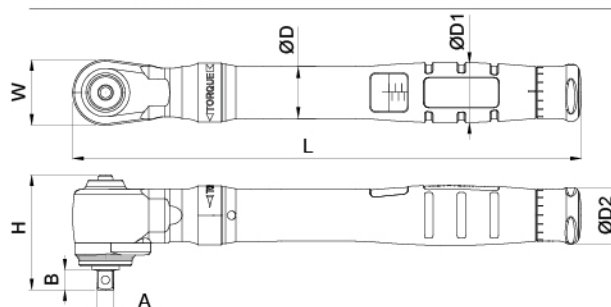

Specification


Accuracy : $\pm 4\%$

ITEM NO.	 A	Range		W	H	B	L	ØD	ØD1	ØD2		Packing
INS2-30N	3/8"	6~30 Nm	0.1 Nm	38.2	67.0	11.9	293.0	30	34.7	33.5	720	12pcs/CTN
INS2-60N	3/8"	10~60 Nm	0.25 Nm	38.2	67.0	11.9	345.6	30	34.7	33.5	850	12pcs/CTN
INS2-100N	3/8"	20~100 Nm	0.25 Nm	38.2	67.0	11.9	397.4	30	36.5	35.9	1050	12pcs/CTN
INS2-200N	1/2"	40~200 Nm	1 Nm	50.0	82.1	13.6	447.0	32	36.5	35.9	N / A	12pcs/CTN
INS2-300N	1/2"	60~300 Nm	2 Nm	50.0	82.1	13.6	576.0	32	36.5	35.9	N / A	12pcs/CTN
INS2-500N	3/4"	100~500 Nm	COMING SOON						COMING SOON			
INS2-1000N	3/4"	200~1000 Nm	COMING SOON						COMING SOON			

Unit : mm

IR**Insulated Ratchet Handle**

Dimensions

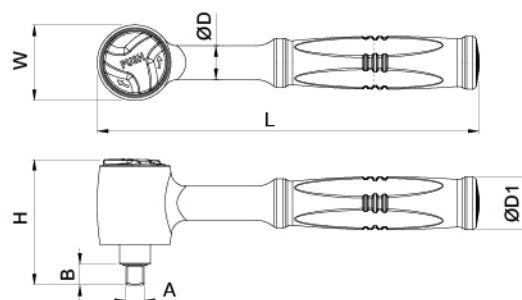

Specification

ITEM NO.	Ø A		W	H	B	L	ØD	ØD1	KG	Packing
IR-38	3/8"	45	36	64	11	198	18	28	0.35	12 pcs/CTN

Unit : mm

IE**Insulated Extensions**


Specification

ITEM NO.	Ø A	L		KG
		inch	mm	
IE-3806	3/8"	6	150	0.16
IE-3810	3/8"	10	250	0.26

Dimensions

**IS****Insulated Sockets**

Dimensions

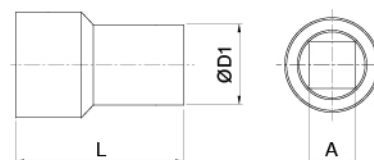

Specification

ITEM NO.	Ø	Ø A	L	ØD1	KG
IS-3806	6	3/8"	43	22.4	0.28
IS-3807	7	3/8"	43	22.4	0.3
IS-3808	8	3/8"	43	22.4	0.3
IS-3809	9	3/8"	43	22.4	0.3
IS-3810	10	3/8"	43	22.4	0.3
IS-3811	11	3/8"	43	22.4	0.3
IS-3812	12	3/8"	44.3	22.4	0.3

Specification

ITEM NO.	Ø	Ø A	L	ØD1	KG
IS-3813	13	3/8"	44.3	22.4	0.31
IS-3814	14	3/8"	44.3	22.4	0.38
IS-3815	15	3/8"	44.3	22.4	0.47
IS-3816	16	3/8"	46.4	22.2	0.47
IS-3817	17	3/8"	46.4	22.2	0.54
IS-3818	18	3/8"	47.2	22.2	0.58
IS-3819	19	3/8"	47.2	22.2	0.61

Unit : mm